

Time Delay Relays

SINGLE SHOT

TRS Series



Description


The TRS series combines an isolated, 8 A electromechanical, relay output with digital timing circuitry. False trigger of the TRS series by a transient is unlikely because of the complete isolation of the circuit from the line prior to initiation. The initiate contact is common to one side of the line and may be utilized to operate other loads. Installation is easy due to the TRS's industry standard 8 or 11-pin plug-in base wiring.

Operation (Single Shot)

Input voltage must be applied to the input before and during timing. Upon momentary or maintained closure of the initiate switch (leading edge triggered), the output energizes for a measured interval of time. At the end of the delay, the output de-energizes. Opening or reclosing the initiate switch during timing has no effect on the time delay. Applying input voltage with the initiate switch closed will energize the load and begin the time delay.

Reset: Reset occurs when the time delay is complete and the initiate switch is opened. Loss of input voltage resets the time delay and output.

Wiring Diagram

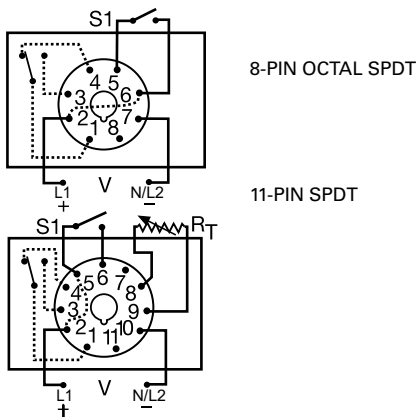

Features & Benefits

FEATURES	BENEFITS
Complete isolation of circuit from line	No false trip due to transients
Industry standard octal plug connection	Eliminates need for special connectors
Isolated, 8 A, SPDT output contacts	Allows control of loads with independent voltage sources
Digital circuitry	Repeat accuracy +/- 2 %

Ordering Information

MODEL	INPUT VOLTAGE	ADJUSTMENT	OUTPUT FORM	TIME TOLERANCE	TIME DELAY
TRS24D7Z10	24 V dc/28 V dc	External	11-Pin, SPDT no potentiometer	+/- 5 %	0.1–10 s

Time Delay Relays

SINGLE SHOT

Accessories



OT08PC 8-pin Octal Socket for UL listing*
8-pin 35 mm DIN-rail or surface mount. Rated at 10 A @ 600 V ac. Surface mounted with two #6 screws or snaps onto a 35 mm DIN rail.



OT11PC Octal Socket for UL listing*
11-pin surface & DIN rail mountable. Rated for 10 A @ 300 V ac



P1011-6 Octal Socket for UL listing*
8-pin surface mount socket with binder head screw terminals. Rated 10 A @ 600 V ac.



P0700-7 Versa-Knob
Designed for 0.25 in (6.35 mm) shaft of Versa-Pot. Semi-gloss industrial black finish.



P1004-95, P1004-95-X Versa-Pot
Panel mountable, industrial potentiometer recommended for remote time delay adjustment.



C103PM (AL) DIN Rail
35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length.


Selection Guide

External R_T P/N Selection Table

VALUE	PART NUMBER**
100K ohm	P1004-95
100K ohm	P1004-95-X

** Externally adjustable potentiometers. Numbers with additional "-X" include two pre-soldered 8" wire leads with 1/4" female quick-connect terminals (for clockwise increase).

Function Diagram

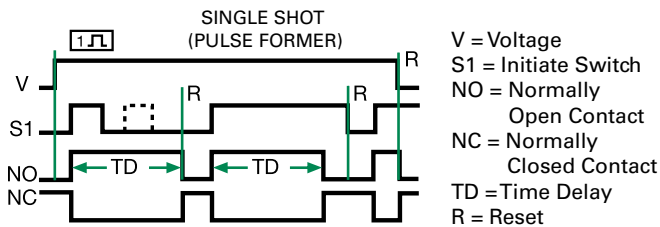

Specifications

Time Delay

Type Digital circuitry
Range See "Ordering Information" table
Repeat Accuracy ±2 %

Fixed Time Tolerance & Setting Accuracy ±5, 10, or 20 %

Initiate Time ≤ 70 ms

Reset Time ≤ 75 ms

Recycle Time ≤ 250 ms

Time Delay vs Temp. & Voltage ≤±5 %

Input

Voltage 24/28 V dc; 24, 120 V ac

Tolerance

24 V dc/ac -15 % - 20 %

120 V ac -20 % - 10 %

AC Line Frequency 50/60 Hz

Power Consumption ≤ 3.25W

Output

Type Electromechanical relay

Form Isolated SPDT or DPDT

Rating 8 A resistive @ 120/240 V ac;

1/3 hp @ 120/240 V ac

Mechanical - 1 x 10⁷; Electrical - 1 x 10⁶

Life

Protection

Insulation Resistance ≥ 100 MΩ

Isolation Voltage ≥ 1500 V rms between input & output terminals

Dc units are reverse polarity protected

Polarity

Mechanical

Mounting Plug-in socket

Termination Octal 8-pin plug-in or 11-pin plug-in

Dimensions **H** 44.45 mm (1.75"); **W** 60.33 mm (2.38");

D (with socket) 104.78 mm (4.13")

Environmental

Operating/Storage

Temperature -20 °C to 65 °C/-30 °C to 85 °C

Weight ≈ 4 oz (113 g)

Safety Marks

UL (socket required)* 4 oz (113 g)

*UL Listed when used with Part Number OT08-PC, RB08-PC, OT11-PC, or RB11-PC manufactured by Custom Connector Corp.

Note: Manufacturer's recommended screw terminal torque for the OT series sockets is 12 in-lbs.

Disclaimer Notice – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.