

COMPACT LOW VOLTAGE DISCONNECT

100A • 12 or 24V DC • IP67 • **OBSOLETE 2018**


Cole Hersee®
 A Littelfuse® Brand


Description

Unit disconnects non-critical loads when battery voltage falls below threshold, reconnects when battery is recharged.

Unit is auto-ranging: identifies whether system is 12V or 24V, and automatically establishes thresholds. One part number; two voltages.

Eliminates dead battery service calls and lost time by extending battery life and preventing irreversible damage due to excessive discharge.

No action is required by vehicle operator to protect the batteries – unit automatically disconnects and reconnects, giving operator a warning one minute before disconnect. 200mA alarm signal can drive audible or visual systems or any large device via a relay. Optional manual override feature.

Electronics are sealed to IP67, see Installation Instructions IF-162 for mounting and wiring details. Solid state reliability and resistance to vibration – replaces vulnerable conventional solenoids. Unit exceeds one million cycles and is protected from overcurrent, overvoltage, and under-voltage. Minimal draw on battery (only 1mA standby).

Protects vulnerable onboard electronics such as GPS, phone, computer. Solid-state switching creates less electrical noise and interference, and eliminates spikes.

Features and Benefits

- Electronically senses battery level and conserves starting power
- Prolongs battery life by preventing battery damage.
- Unit works with 12V or 24V DC systems

Specifications Overview

| | |
|--|---|
| Voltage: | 12/24V DC (Auto Ranging) |
| Operating Voltage: | 12V DC: 9V Min, 12V Typical, 16V Max 24V DC: 18V Min, 24V Typical, 32V Max |
| Disconnect & Connect Voltage: | See table on page 2 |
| Overcurrent Protection: | 135A |
| Ingress Protection: | IP67 |
| Operating Temperature: | -40° to +85°C (-40° to +185°F) |
| Dimensions: | 4.27 x 4.50 x 3.11 (108.6 x 114.3 x 79.0) |

Web Resources

Download technical resources at:
littelfuse.com/48513

Ordering Information

| PART NUMBER | DESCRIPTION |
|-------------|--|
| 48513 | Unit Only |
| 48513-01-BX | Unit with Harness (p/n 12804) |
| 48513-02-BX | Unit with Harness (p/n 12804) & Rocker Switch (p/n 58326-06) |
| 48513-03-BX | Unit with Harness (p/n 12804) & Toggle Switch (p/n 55088) |
| 48713 | Programmable Unit Only |

Associated Items

| PART NUMBER | DESCRIPTION |
|-------------|----------------|
| 12804 | Plug & Harness |
| 58326-06 | Rocker Switch |
| 55088 | Toggle Switch |



12804



58326-06



55088

Datasheet Replaces Hotfeed Number D-619

COMPACT LOW VOLTAGE DISCONNECT

100A • 12 or 24V DC • IP67 • **OBSOLETE 2018**

Electrical Characteristics

| CHARACTERISTIC | MIN | TYPICAL | MAX | NOTES |
|----------------------------|--------|---------|--------|---|
| Operating voltage (12V) | 9V | 12V | 16V | If used with 12V DC systems |
| *Disconnect voltage (+12V) | 12.05V | 12.1V | 12.15V | When voltage drops below 12.1V, system activities the alarm for one minute, then disconnects loads. |
| *Connect voltage (+12V) | 12.95V | 13.0V | 13.05V | |
| Operating Voltage (24V) | 18V | 24V | 32V | If used with 24V DC systems |
| Quiescent Current | | 1mA | 2mA | Circuit operating current |
| Maximum Rated Current | | | | |
| *Overcurrent Protection | | 135A | | System will disconnect load and sound alarm after 3 seconds of excessive current. |
| *Key-Off Timer | | 15 Mins | | Optional feature. After key-off, unit will wait a set time before activating alarm. One minute later, loads are shut off. |


* These characteristics are programmable in 48713 series LVDs.

Environmental Specifications

| CHARACTERISTIC | PARAMETER | NOTES |
|-----------------------------|---------------------------------|----------------------------|
| Operating Temperature Range | -40° to +85°C -40° to +185°F | 100A at 85°C, 125A at 60°C |
| Ingress Protection Rating | IP67 | Per IEC 529 |
| Humidity | 0 to 90%RH | |
| Vibration | 10-500Hz | Per SAE J1455 |
| Shock | | Per SAE J1455 |
| Thermal Shock | | Per SAE J1455 |
| Inductive Transient | +/- 600V | Per SAE J1455 |
| Load Dump | +150V | Per SAE J1455 |

| CHARACTERISTIC | PARAMETER | NOTES |
|-------------------|-----------|---------------------|
| Battery terminals | (1/4"-20) | 50 in -lbs (5.78Nm) |

Dimensions

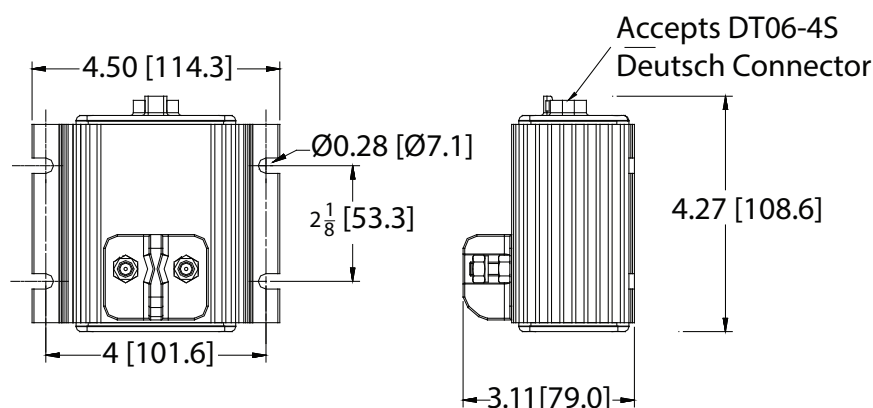

Visit Littelfuse.com for the most up-to-date product information. Littelfuse products are designed for specific applications and should not be used for any purpose (including, without limitation, automotive applications) not expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse product documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse product documentation.