

# Anode Shorted Gate Turn-Off Thyristor Types G3000TF450

## Absolute Maximum Ratings

|               | VOLTAGE RATINGS                                 | MAXIMUM LIMITS | UNITS |
|---------------|-------------------------------------------------|----------------|-------|
| $V_{DRM}$     | Repetitive peak off-state voltage, (note 1)     | 4500           | V     |
| $V_{RSM}$     | Non-repetitive peak off-state voltage, (note 1) | 4500           | V     |
| $V_{DC-link}$ | Maximum continuous DC-link voltage              | 2800           | V     |
| $V_{RRM}$     | Repetitive peak reverse voltage                 | 18             | V     |
| $V_{RSM}$     | Non-repetitive peak reverse voltage             | 18             | V     |

|              | RATINGS                                                 | MAXIMUM LIMITS     | UNITS       |
|--------------|---------------------------------------------------------|--------------------|-------------|
| $I_{TGQ}$    | Peak turn-off current, (note 2)                         | 3000               | A           |
| $L_s$        | Snubber loop inductance, $I_{TM}=I_{TGQ}$ , (note 2)    | 200                | nH          |
| $I_{T(AV)M}$ | Mean on-state current, $T_{sink}=55^{\circ}C$ (note 3)  | 1381               | A           |
| $I_{T(RMS)}$ | Nominal RMS on-state current, $25^{\circ}C$ (note 3)    | 2770               | A           |
| $I_{TSM}$    | Peak non-repetitive surge current $t_p=10ms$ , (Note 4) | 24                 | kA          |
| $I_{TSM2}$   | Peak non-repetitive surge current $t_p=2ms$ , (Note 4)  | 32                 | kA          |
| $I^2t$       | $I^2t$ capacity for fusing $t_p=10ms$                   | $2.88 \times 10^6$ | $A^2s$      |
| $di/dt_{cr}$ | Critical rate of rise of on-state current, (note 5)     | 500                | $A/\mu s$   |
| $P_{FGM}$    | Peak forward gate power                                 | 200                | W           |
| $P_{RGM}$    | Peak reverse gate power                                 | 21                 | kW          |
| $I_{FGM}$    | Peak forward gate current                               | 100                | A           |
| $V_{RGM}$    | Peak reverse gate voltage (note 6).                     | 18                 | V           |
| $T_{j op}$   | Operating temperature range                             | -40 to +125        | $^{\circ}C$ |
| $T_{stg}$    | Storage temperature range                               | -40 to +125        | $^{\circ}C$ |

### Notes:-

- 1)  $V_{GK}=-2Volts$ .
- 2)  $T_j=125^{\circ}C$ ,  $V_D=2800V$ ,  $V_{DM} \leq 4500V$   $di_{GQ}/dt=40A/\mu s$ ,  $I_{TGQ}=3000A$  and  $C_s=6\mu F$ .
- 3) Double-side cooled, single phase; 50Hz,  $180^{\circ}$  half-sinewave.
- 4)  $T_{j(initial)}=125^{\circ}C$ , single phase,  $180^{\circ}$  sinewave, re-applied voltage  $V_D=V_R \leq 10V$ .
- 5)  $I_T=3000A$  repetitive,  $I_{GM}=30A$ ,  $di_{GM}/dt=20A/\mu s$ . For  $di/dt > 500A/\mu s$  please consult the factory.
- 6) May exceed this value during turn-off avalanche period.

## Characteristics

|              | Parameter                                  | MIN  | TYP  | MAX  | TEST CONDITIONS                                                                                                             | UNITS      |
|--------------|--------------------------------------------|------|------|------|-----------------------------------------------------------------------------------------------------------------------------|------------|
| $V_{TM}$     | Maximum peak on-state voltage              | -    | 3.75 | 4.0  | $I_G=8A$ , $I_T=3000A$                                                                                                      | V          |
| $I_L$        | Latching current                           | -    | 40   | -    | $T_J=25^\circ C$                                                                                                            | A          |
| $I_H$        | Holding current.                           | -    | 40   | -    | $T_J=25^\circ C$                                                                                                            | A          |
| $dv/dt_{cr}$ | Critical rate of rise of off-state voltage | 1000 | -    | -    | $V_D=3000V$ , $V_{GR}=-2V$                                                                                                  | V/ $\mu s$ |
| $I_{DRM}$    | Peak off state current                     | -    | -    | 60   | Rated $V_{DRM}$ , $V_{GR}=-2V$                                                                                              | mA         |
| $I_{RRM}$    | Peak reverse current                       | -    | -    | 20   | $V_{RR}=18V$                                                                                                                | mA         |
| $I_{GKM}$    | Peak negative gate leakage current         | -    | -    | 20   | $V_{GR}=-18V$                                                                                                               | mA         |
| $V_{GT}$     | Gate trigger voltage                       | -    | 1.0  | -    | $T_J=-40^\circ C$                                                                                                           | V          |
|              |                                            | -    | 0.8  | 1.0  | $T_J=25^\circ C$ $V_D=25V$ , $R_L=25m\Omega$                                                                                | V          |
|              |                                            | -    | 0.6  | -    | $T_J=125^\circ C$                                                                                                           | V          |
| $I_{GT}$     | Gate trigger current                       | -    | 3    | 8    | $T_J=-40^\circ C$                                                                                                           | A          |
|              |                                            | -    | 1.5  | 3    | $T_J=25^\circ C$ $V_D=25V$ , $R_L=25m\Omega$                                                                                | A          |
|              |                                            | 50   | 500  | 1000 | $T_J=125^\circ C$                                                                                                           | mA         |
| $t_d$        | Delay time                                 | -    | 1.5  | 3    | $V_D=2250V$ , $I_{TGQ}=3000A$ , $di_T/dt=300A/\mu s$ ,<br>$I_{GM}=30A$ , $di_G/dt=20A/\mu s$ , $C_S=6\mu F$ , $R_S=5\Omega$ | $\mu s$    |
| $t_{gt}$     | Turn-on time                               | -    | 4    | 10   |                                                                                                                             | $\mu s$    |
| $E_{on}$     | Turn-on energy                             | -    | 0.7  | 1.5  |                                                                                                                             | J          |
| $t_f$        | Fall time                                  | -    | 2    | -    | $V_{DM}=3600V$ , $I_{TGQ}=3000A$ , $di_{GQ}/dt=40A/\mu s$ ,<br>$V_{GR}=-16V$ , $C_S=6\mu F$                                 | $\mu s$    |
| $t_s$        | Storage time                               | -    | 20   | 25   |                                                                                                                             | $\mu s$    |
| $t_{gq}$     | Turn-off time                              | -    | 22   | 30   |                                                                                                                             | $\mu s$    |
| $I_{GQM}$    | Peak turn-off gate current                 | -    | 850  | -    |                                                                                                                             | A          |
| $Q_{GQ}$     | Turn-off gate charge                       | -    | 10   | -    |                                                                                                                             | mC         |
| $t_{tail}$   | Tail time                                  | -    | 20   | -    |                                                                                                                             | $\mu s$    |
| $E_{off}$    | Turn-off energy                            | -    | 7    | 10   |                                                                                                                             | J          |
| $R_{thJK}$   | Thermal resistance junction to sink        | -    | 12   | -    | Double side cooled                                                                                                          | K/kW       |
|              |                                            | -    | 26   | -    | Cathode side cooled                                                                                                         | K/kW       |
|              |                                            | -    | 22   | -    | Anode side cooled                                                                                                           | K/kW       |
| F            | Mounting force                             | 30   | -    | 44   | (see note 2)                                                                                                                | kN         |
| $W_t$        | Weight                                     | -    | 1.5  | -    |                                                                                                                             | kg         |

Notes:-

- 1) Unless otherwise indicated  $T_J=125^\circ C$ .
- 2) For other clamping forces, consult factory.

## Notes on ratings and characteristics.

### 1. Maximum Ratings.

#### 1.1 Off-state voltage ratings.

Unless otherwise indicated, all off-state voltage ratings are given for gate conditions as diagram 1. It should be noted that  $V_{DRM}$  is the repeatable peak voltage, which may be applied to the device and does not relate to a DC operating condition.




Diagram 1.

#### 1.2 Peak turn-off current.

The figure given in maximum ratings is the highest value for normal operation of the device under conditions given in note 2 of ratings. A snubber circuit equivalent to that given in diagram 2 is assumed. If a more complex snubber, such as an Underland circuit, is employed then the equivalent  $C_s$  should be used and  $L_s < 0.2\mu H$  must be ensured.




Diagram 2.

#### 1.3 R.M.S and average current.

Measured as for standard thyristor conditions, double side cooled, single phase, 50Hz, 180° half-sinewave. These are included as a guide to compare the alternative types of GTO thyristors available; values cannot be applied to practical applications, as they do not include switching losses.

#### 1.4 Surge rating and $I^2t$ .

Ratings are for half-sinewave, peak value against duration is given in the curve of figure 2.

#### 1.5 Snubber loop inductance.

Use of GTO thyristors with snubber loop inductance,  $L_s < 0.2\mu H$  implies no dangerous  $V_s$  voltages (see diagrams 2 & 3) can be applied, provided the other conditions given in note 1.2 are enforced. Alternatively  $V_s$  should be limited to 800 Volts to avoid possible device failure.

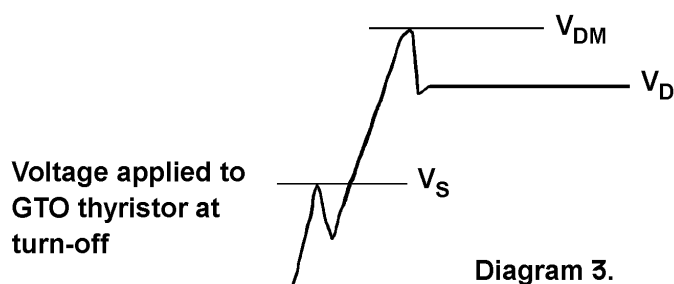


Diagram 3.

#### 1.6 Gate ratings

The absolute conditions above which the gate may be damaged. It is permitted to allow  $V_{GK(AV)}$  during turn-off to exceed  $V_{RGM}$  which is the implied DC condition.

## 2 Characteristics

### 2.1 Instantaneous on-state voltage

Measured using a 500µs square pulse, see also the curves of figure 1 for other values of  $I_{TM}$ .

### 2.2 Latching and holding current

These are considered to be approximately equal and only the latching current is measured, type test only as outlined below. The test circuit and wave diagrams are given in diagram 4. The anode current is monitored on an oscilloscope while  $V_D$  is increased, until the current is seen to flow during the un-gated period between the end of  $I_G$  and the application of reverse gate voltage. Test frequency is 100Hz with  $I_{GM}$  &  $I_G$  as for  $t_d$  of characteristic data.

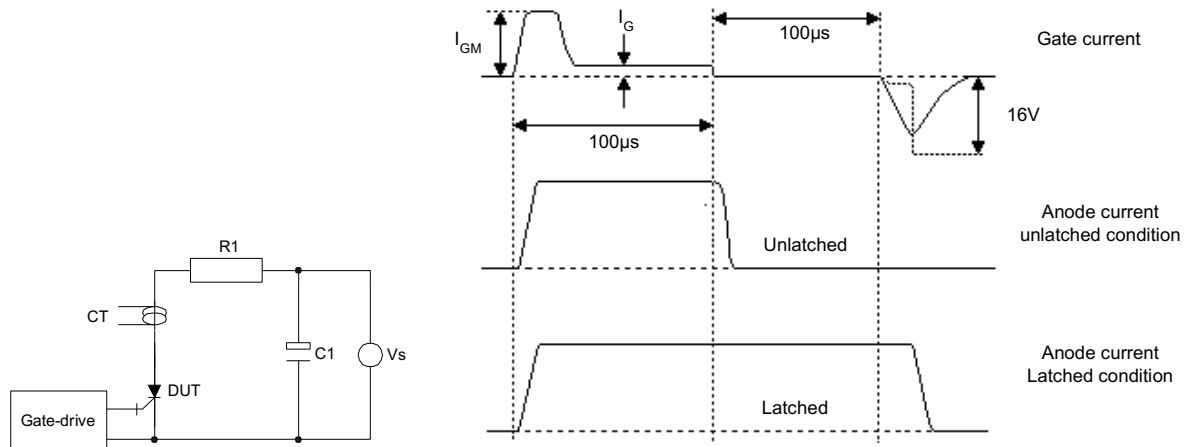


Diagram 4, Latching test circuit and waveforms.

### 2.3 Critical dv/dt

The gate conditions are the same as for 1.1, this characteristic is for off-state only and does not relate to dv/dt at turn-off. The measurement, type test only, is conducted using the exponential ramp method as shown in diagram 5. It should be noted that GTO thyristors have a poor static dv/dt capability if the gate is open circuit or  $R_{GK}$  is high impedance. Typical values: - dv/dt < 100V/µs for  $R_{GK} > 10\Omega$ .

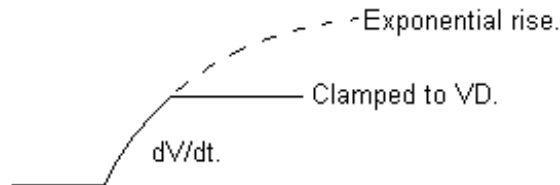


Diagram 5, Definition of dv/dt.

### 2.4 Off-state leakage

For  $I_{DRM}$  see notes 1.1. For gate leakage  $I_{GK}$ , the off-state gate circuit is required to sink this leakage and still maintain minimum of -2 Volts. See diagram 6.




Diagram 6.

### 2.5 Gate trigger characteristics.

These are measured by slowly ramping up the gate current and monitoring the transition of anode current and voltage (see diagram 7). Maximum and typical data of gate trigger current, for the full junction temperature range, is given in the curves of figure 4. Only typical figures are given for gate trigger voltage for the full allowable junction temperature range. Figures 4 should be used in when considering forward gate drive circuit requirement. The gate drive requirements should always be calculated for lowest junction temperature start-up condition.

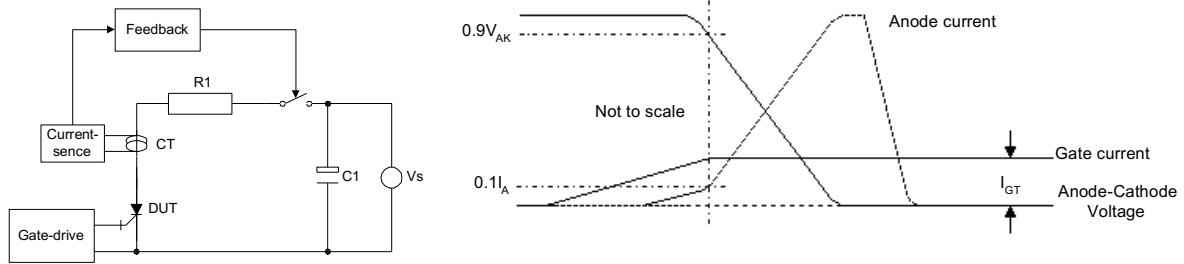


Diagram 7, Gate trigger circuit and waveforms.

## 2.6 Turn-on characteristics

The definitions of turn-on parameters used in the characteristic data are given in diagram 8.

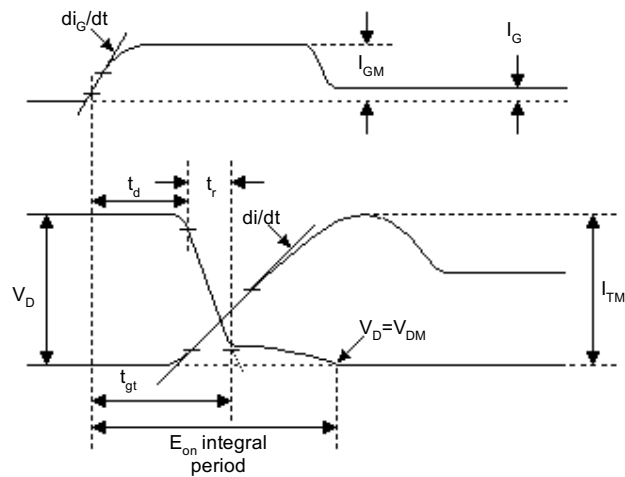


Diagram 8, Turn-on wave-diagrams.

## 2.7 Turn-off characteristics

The definitions of turn-off parameters used in the characteristic data are given in diagram 9.

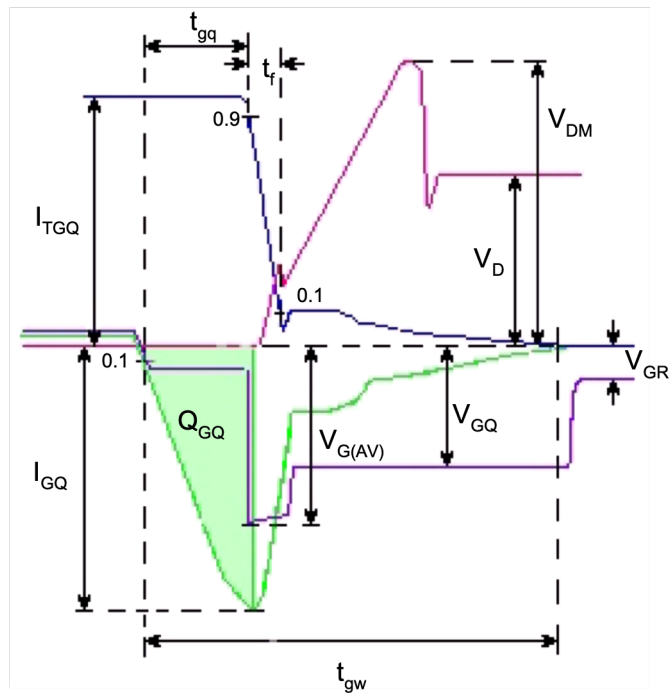


Diagram 9, Turn-off parameter definitions.

## Curves

Figure 1 - On-state characteristics of Limit device

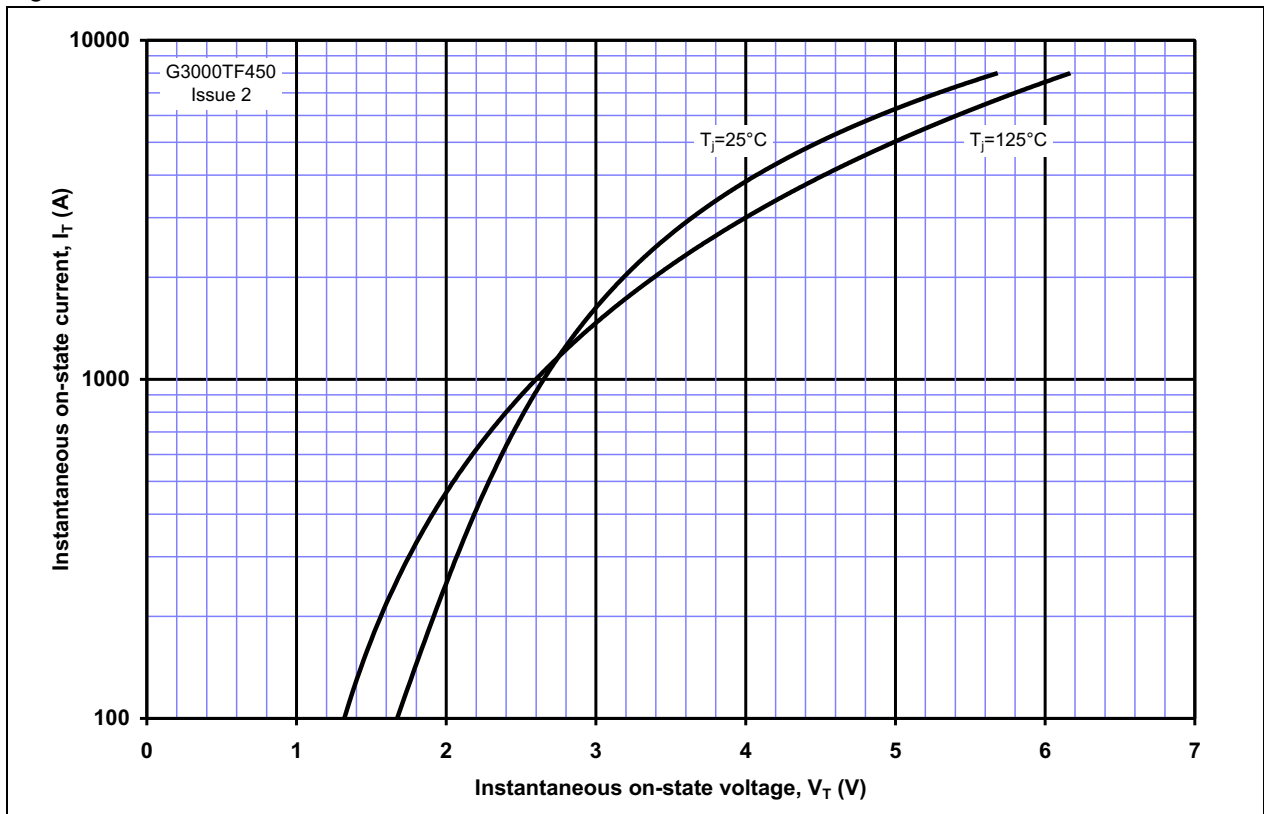


Figure 2 - Maximum surge and  $I^2t$  Ratings

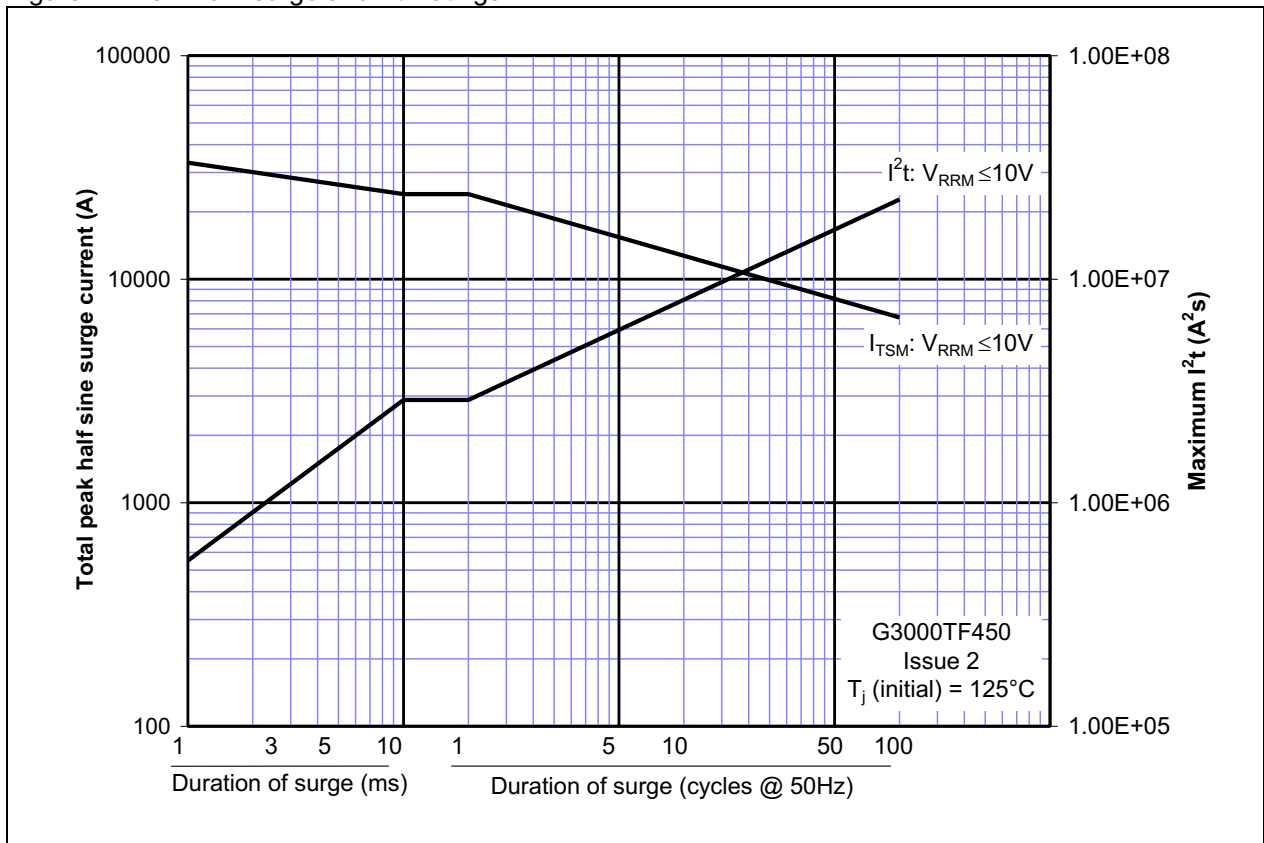


Figure 3 – Instantaneous forward gate characteristics

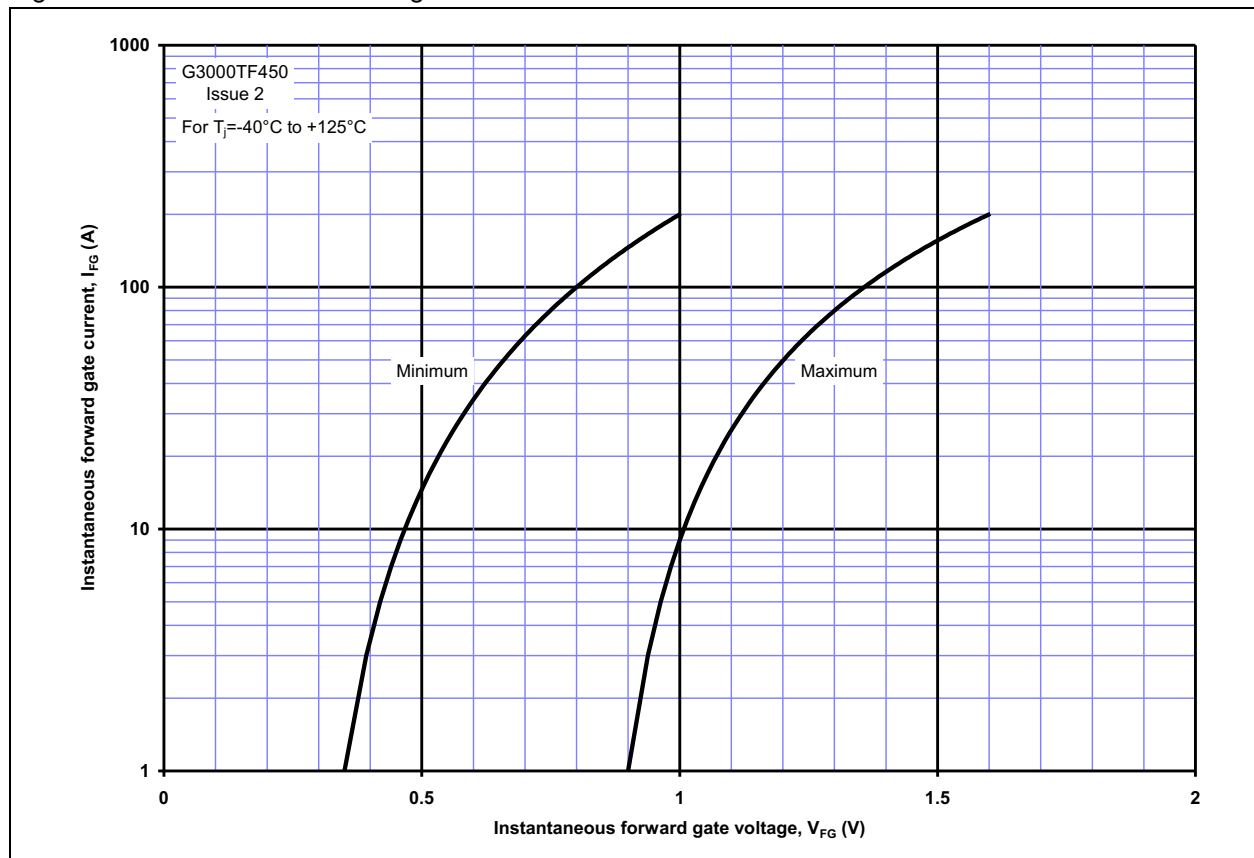


Figure 4 – Transient thermal impedance

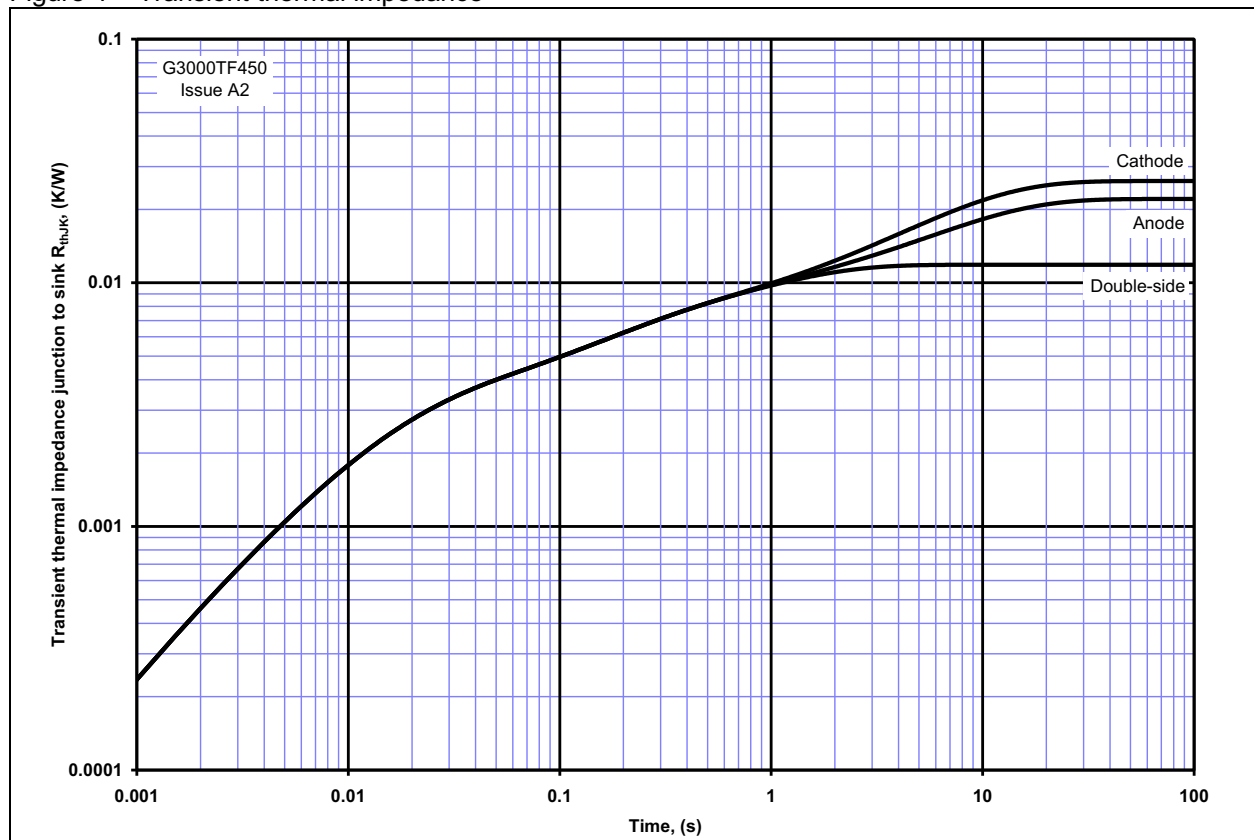


Figure 5 – Typical forward blocking voltage vs. external gate-cathode resistance

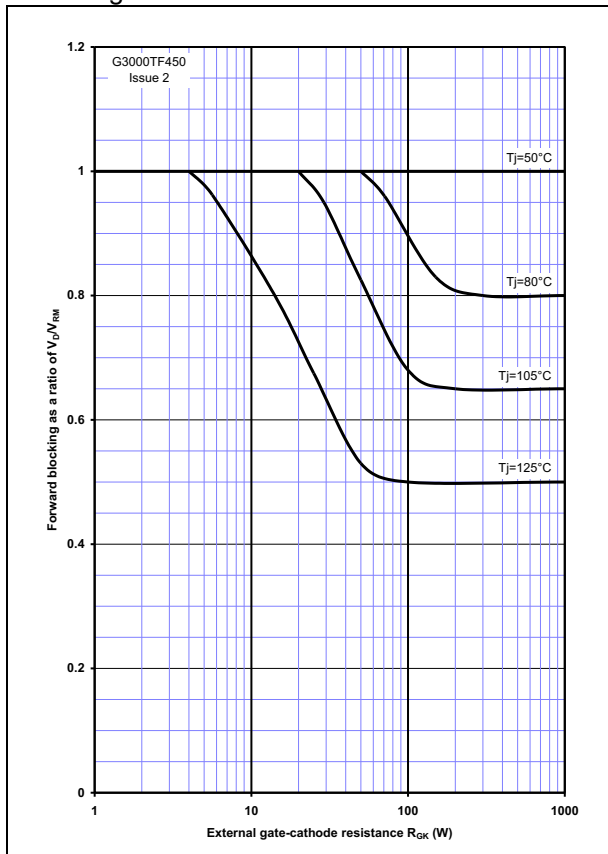


Figure 6 – D.C. gate trigger current vs. junction temperature

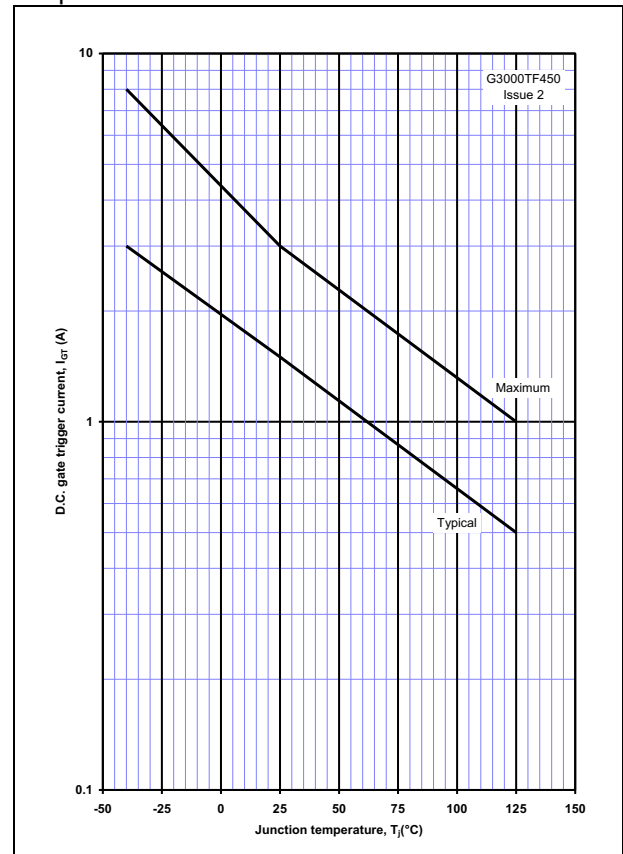


Figure 7 – Typical turn-on energy per pulse vs. turn-on current

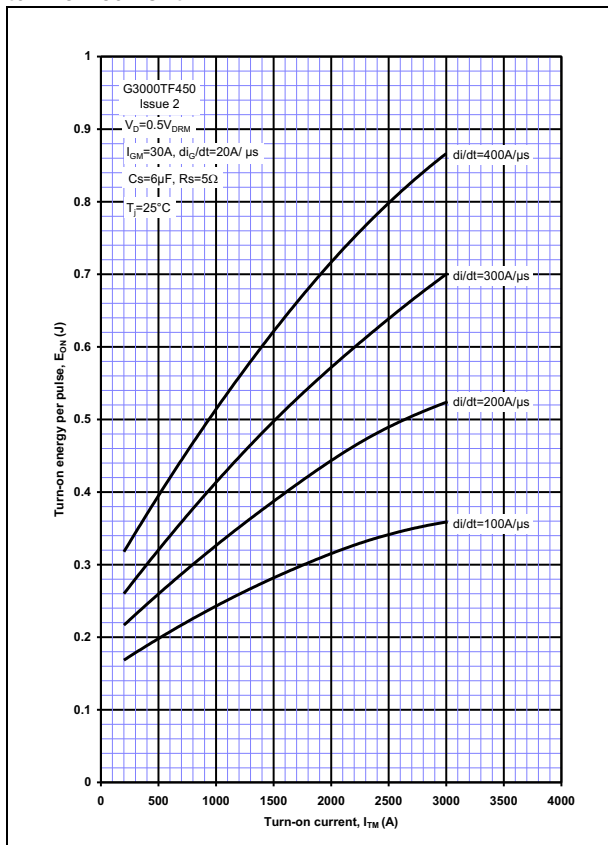


Figure 8 – Maximum turn-on time vs. rate of rise of on-state current

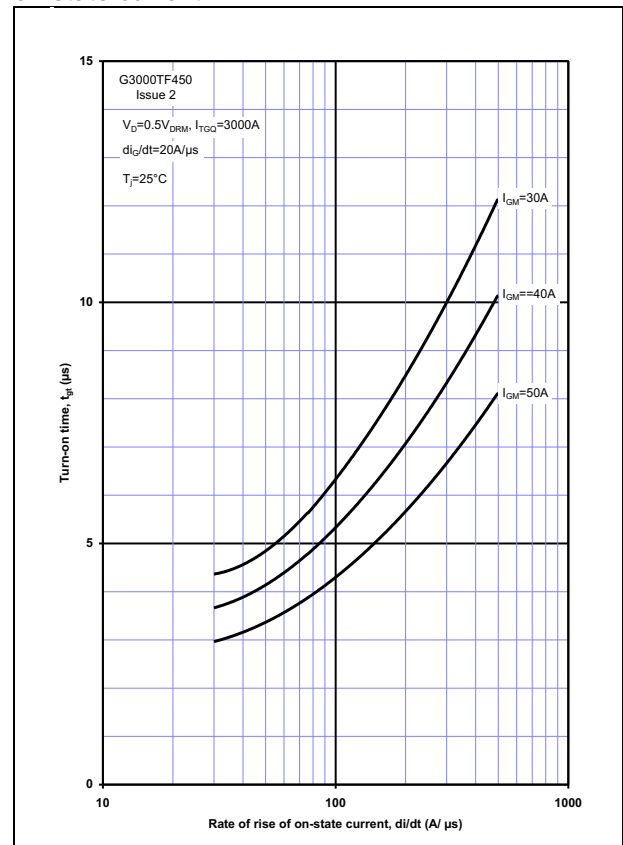




Figure 9 – Typical peak turn-off gate current vs. turn-off current

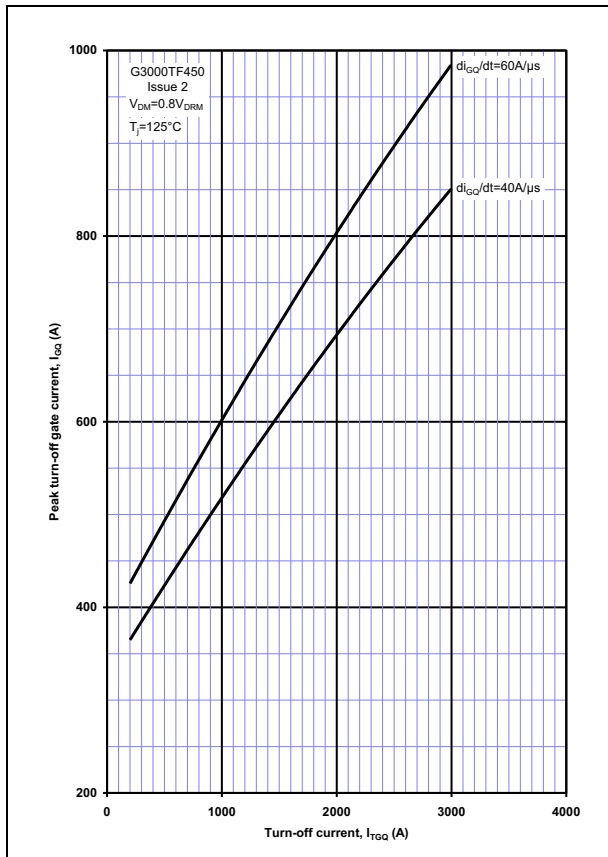


Figure 10 – Typical gate turn-off charge vs. turn-off current

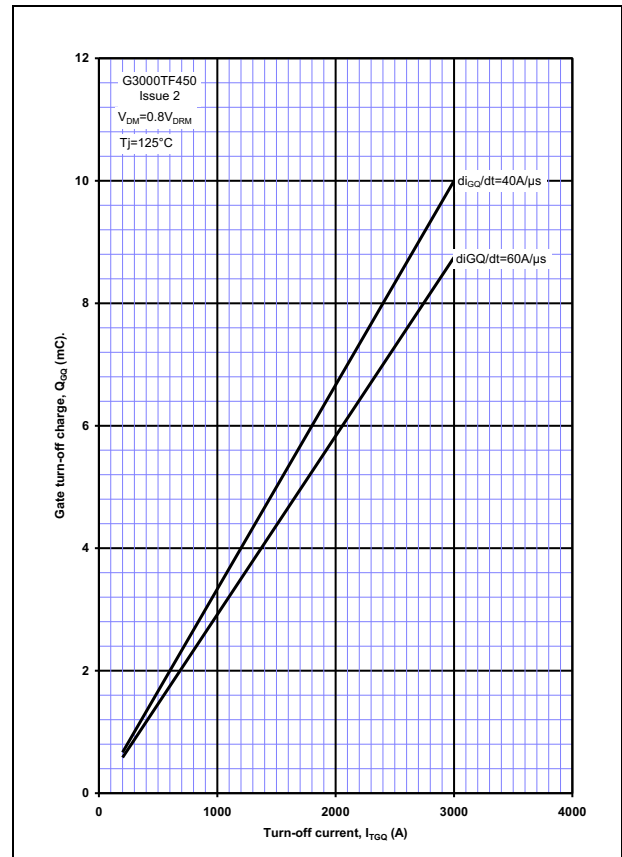


Figure 11 – Maximum turn-off time vs. turn-off current

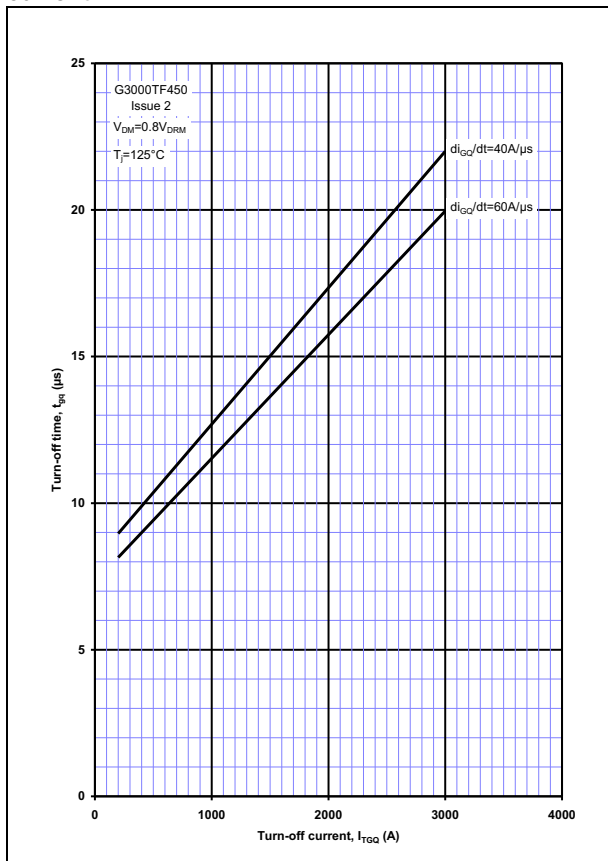


Figure 12 – Typical turn-off energy per pulse vs. turn-off current

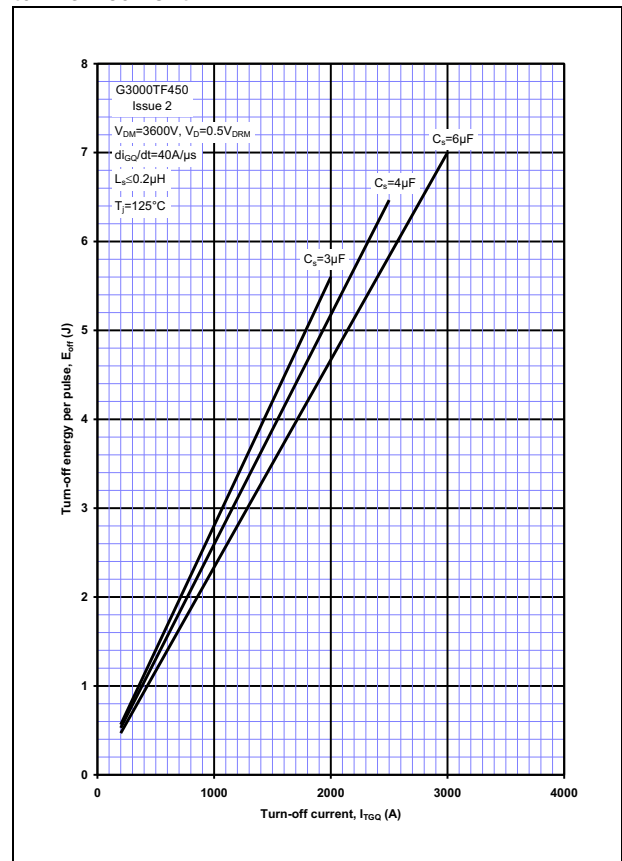


Figure 13 – Maximum permissible turn-off current vs. snubber capacitance

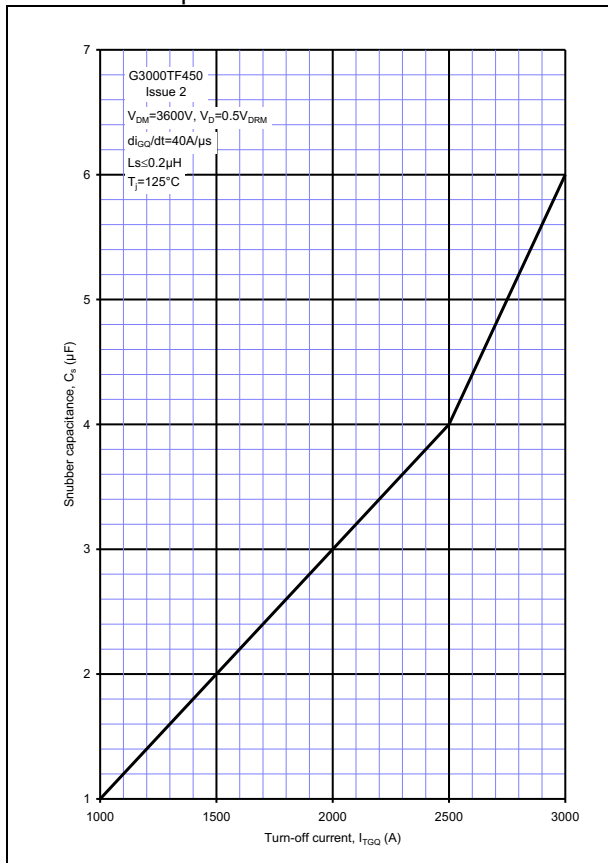


Figure 14 – Maximum turn-off current vs. turn-off voltage




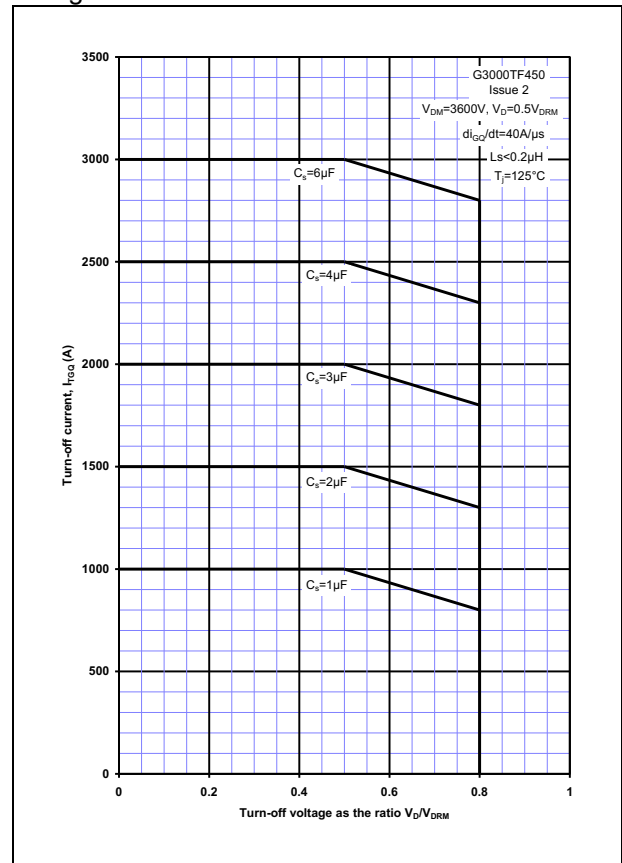
Figure 15 – typical tail time ( $I_{TGQ}<2A$ ) vs. turn-off current

Figure 16 – Minimum off-time to re-fire device vs. turn-off current

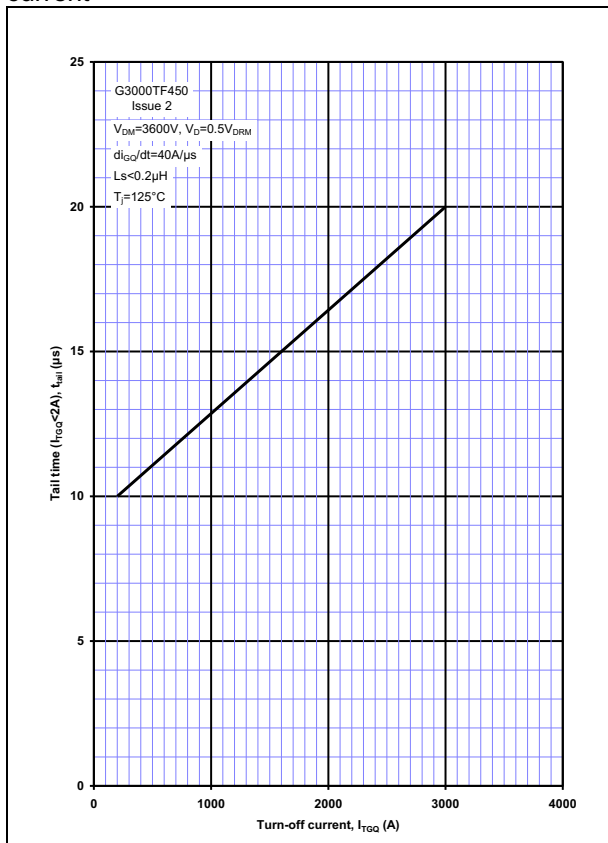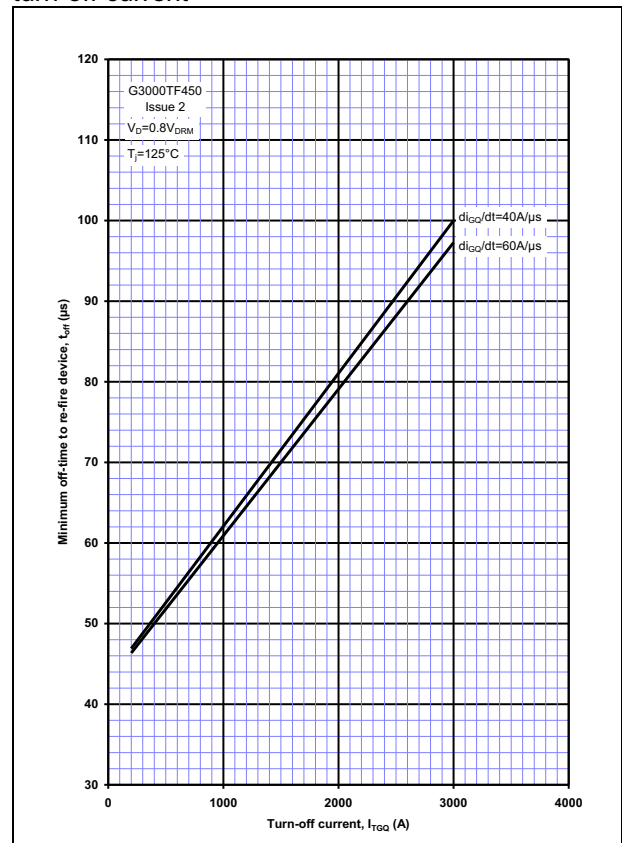

## Outline Drawing & Ordering Information

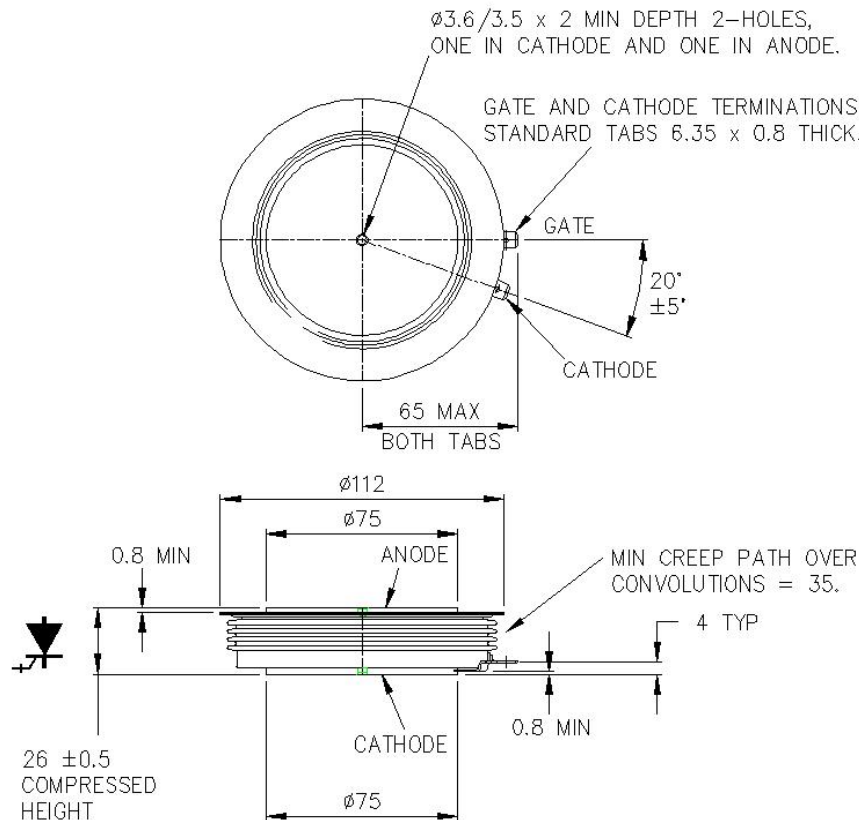

101A316

### ORDERING INFORMATION

(Please quote 10 digit code as below)

| <b>G3000</b>       | <b>TF</b>             | <b>45</b>                                 | <b>0</b>   |
|--------------------|-----------------------|-------------------------------------------|------------|
| Fixed<br>Type Code | Fixed<br>Outline Code | Fixed Voltage Code<br>$V_{DRM}/100$<br>45 | Fixed Code |

Order code: G3000TF450

**IXYS Semiconductor GmbH**  
Edisonstraße 15  
D-68623 Lampertheim  
Tel: +49 6206 503-0  
Fax: +49 6206 503-627  
E-mail: [marcom@ixys.de](mailto:marcom@ixys.de)



**IXYS UK Westcode Ltd**  
Langley Park Way, Langley Park,  
Chippenham, Wiltshire, SN15 1GE.  
Tel: +44 (0)1249 444524  
Fax: +44 (0)1249 659448  
E-mail: [sales@ixysuk.com](mailto:sales@ixysuk.com)

**IXYS Corporation**  
1590 Buckeye Drive  
Milpitas CA 95035-7418  
Tel: +1 (408) 457 9000  
Fax: +1 (408) 496 0670  
E-mail: [sales@ixys.net](mailto:sales@ixys.net)

[www.ixysuk.com](http://www.ixysuk.com)

[www.ixys.com](http://www.ixys.com)

**IXYS Long Beach**  
IXYS Long Beach, Inc  
2500 Mira Mar Ave, Long Beach  
CA 90815  
Tel: +1 (562) 296 6584  
Fax: +1 (562) 296 6585  
E-mail: [service@ixyslongbeach.com](mailto:service@ixyslongbeach.com)

The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors IXYS UK Westcode Ltd.

© IXYS UK Westcode Ltd.

In the interest of product improvement, IXYS UK Westcode Ltd reserves the right to change specifications at any time without prior notice.

Devices with a suffix code (2-letter, 3-letter or letter/digit/letter combination) added to their generic code are not necessarily subject to the conditions and limits contained in this report.



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).