

THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.


|      | REVISIONS |                             |             |          |  |  |  |  |  |
|------|-----------|-----------------------------|-------------|----------|--|--|--|--|--|
| ZONE | REV.      | DESCRIPTION                 | DATE        | APPROVED |  |  |  |  |  |
|      | Α         | PCO5300241- INITIAL RELEASE | 15/FEB/2023 | Du.C     |  |  |  |  |  |

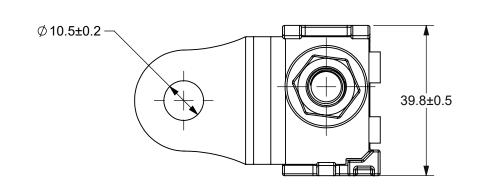


65.0±0.5

46±1

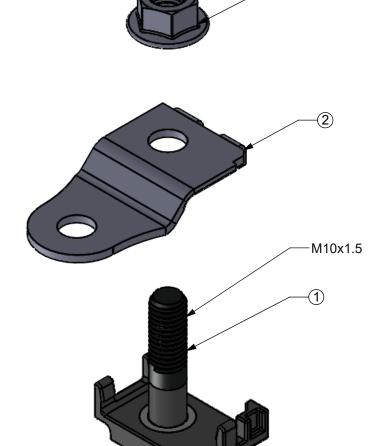

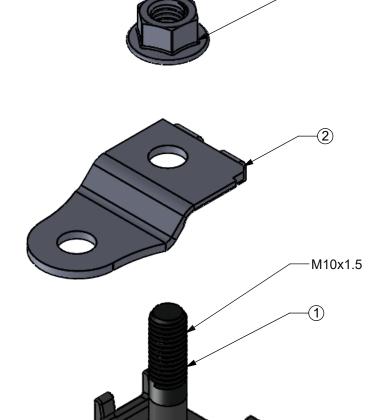

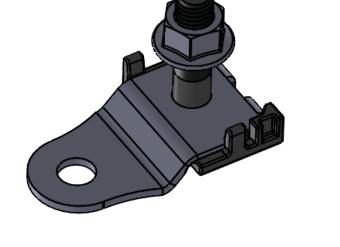

Ε

D

| 3   | M10 FLANGE NUT | 1    |
|-----|----------------|------|
| 2   | BUSBAR         | 1    |
| 1   | BASE           | 1    |
| NO. | COMPONENT NAME | QTY. |

LIMIT DIMENSIONS OF PLASTIC MOLDED PARTS FOR NOMINAL SIZE RANGES PER ISO IN LITTELFUSE CVP-NPD20-0002, DIMENSIONS mm

|  | 1 to 3 | >3 to 6 | >6 to<br>10 | >10 to<br>18 | >18 to<br>30 | >30 to<br>50 | >50 to<br>80 | >80 to<br>120 | >120 to | >180 to<br>250 | >250 to | >315 to<br>400 | ANGLE |
|--|--------|---------|-------------|--------------|--------------|--------------|--------------|---------------|---------|----------------|---------|----------------|-------|
|  | ±0.08  | ±0.11   | ±0.14       | ±0.17        | ±0.20        | ±0.23        | ±0.36        | ±0.50         | ±0.58   | ±0.65          | ±0.70   | ±0.78          | NONE  |
| SURFACE PROFILE DIMENSIONS OF PLASTIC MOLDED PARTS FOR NOMINAL SIZE RANGES F |        |         |             |              |              |              | NGES PE      | ER ISO        |         |                |         |                |       |

IN LITTELFUSE CVP-NPD20-0002, DIMENSIONS MM

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.

FIT/ FUNCTION CRITICAL CHARACTERISTICS

SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL

CPK DENOTES CPK DIMENSIONS MINIMUM CPK VALUE

DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

|         | NAME  | DATE        |  |
|---------|-------|-------------|--|
| DRAWN   | Rex.L | 15/FEB/2022 |  |
| CHECKED | Du.C  | 15/FEB/2022 |  |
|         | -     | -           |  |
|         | TITL  |             |  |
| FORM N  |       |             |  |
| THIRD   |       |             |  |

Littelfuse Expertise Applied Answers Delivered

SMZ M10 FUSE HOLDER

SHEET 1 OF 1

DO NOT SCALE DRAWING

SIZE DWG. NO. OL-0FHZ0241Z SCALE 1:1

| Э. |
|----|
| 6. |

NOTES:

С

В

MAX VOLTAGE: 80V RECOMMENDED M10 MOUNTING TORQUE: 18 ± 2 N-m

OPERATING TEMPERATURE RANGE:-40°C TO +105°C MAX CONTINUOUS CURRENT: 400A

STUD: CARBON STEEL(ZINC-NICKEL PLATING)

BUSBAR: COPPER C110, TIN PLATED

2.5 -

LF P/N: 0FHZ0241Z

8

MATERIAL:

BASE: PA66-GF25, UL94-V0

**NUT: STAINLESS STEEL** 

6 5 3