Standard Rectifier Module

V_{RRM}	=	1200 V
I_{FAV}	=	560 A
V_F	=	0,98 V

Single Diode

Part number

MDO500-12N1

Backside: isolated

E72873



Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very low forward voltage drop
- Improved thermal behaviour

Applications:

- Diode for main rectification
- For single and three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Package: Y1

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Base plate: Copper internally DCB isolated
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

© 2022 IXYS all rights reserved

Rectifier

Symbol	Definition	Conditions		Ratings min.	typ.	max.	Unit
V_{RSM}	*max. non-repetitive reverse blocking voltage*		T_{VJ} = 25°C			1300	V
V_{RRM}	*max. repetitive reverse blocking voltage*		T_{VJ} = 25°C			1200	V
I_R	*reverse current*	V_R = 1200 V	T_{VJ} = 25°C			1	mA
		V_R = 1200 V	T_{VJ} = 140°C			30	mA
V_F	*forward voltage drop*	I_F = 500 A	T_{VJ} = 25°C			1,09	V
		I_F = 1000 A				1,24	V
		I_F = 500 A	T_{VJ} = 125°C			0,98	V
		I_F = 1000 A				1,17	V
I_{FAV}	*average forward current*	T_C = 85°C	T_{VJ} = 140°C			560	A
$I_{F(RMS)}$	*RMS forward current*	180° sine d = 0.5					A
V_{F0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 140°C			0,80	V
r_F	*slope resistance* }					0,38	mΩ
R_{thJC}	*thermal resistance junction to case*					0,072	K/W
R_{thCH}	*thermal resistance case to heatsink*				0,024		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			1600	W
I_{FSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			15,0	kA
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			16,2	kA
		t = 10 ms; (50 Hz), sine	T_{VJ} = 140°C			12,8	kA
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			13,8	kA
I^2t	*value for fusing*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			1,13	MA^2s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			1,09	MA^2s
		t = 10 ms; (50 Hz), sine	T_{VJ} = 140°C			812,8	kA^2s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			788,8	kA^2s
C_J	*junction capacitance*	V_R = 400 V; f = 1 MHz	T_{VJ} = 25°C		762		pF

© 2022 IXYS all rights reserved

Package Y1				Ratings			
Symbol	**Definition**	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
I_{RMS}	*RMS current*	per terminal				600	A
T_{VJ}	*virtual junction temperature*			-40		140	°C
T_{op}	*operation temperature*			-40		125	°C
T_{stg}	*storage temperature*			-40		125	°C
Weight					650		g
M_D	*mounting torque*			4,5		7	Nm
M_T	*terminal torque*			11		13	Nm
$d_{Spp/App}$	*creepage distance on surface | striking distance through air*		*terminal to terminal*	16,0			mm
$d_{Spb/Apb}$			*terminal to backside*	25,0			mm
V_{ISOL}	*isolation voltage*	t = 1 second	50/60 Hz, RMS; I_{ISOL} ≤ 1 mA	4800			V
		t = 1 minute		4000			V

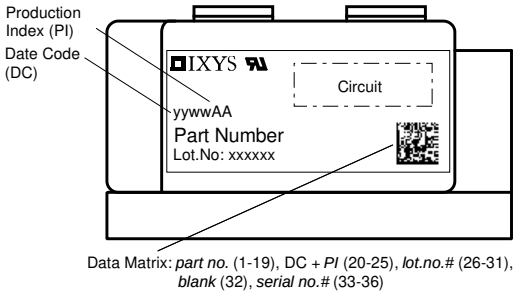

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MDO500-12N1	MDO500-12N1	Box	2	464791

Similar Part	Package	Voltage class
MDO500-14N1	Y1-2-CU	1400
MDO500-16N1	Y1-2-CU	1600
MDO500-18N1	Y1-2-CU	1800
MDO500-20N1	Y1-2-CU	2000
MDO500-22N1	Y1-2-CU	2200

Equivalent Circuits for Simulation

** on die level* T_{VJ} = 140°C



Rectifier

$V_{0\,max}$	*threshold voltage*	0,8	V
$R_{0\,max}$	*slope resistance **	0,19	mΩ

© 2022 IXYS all rights reserved

Outlines Y1

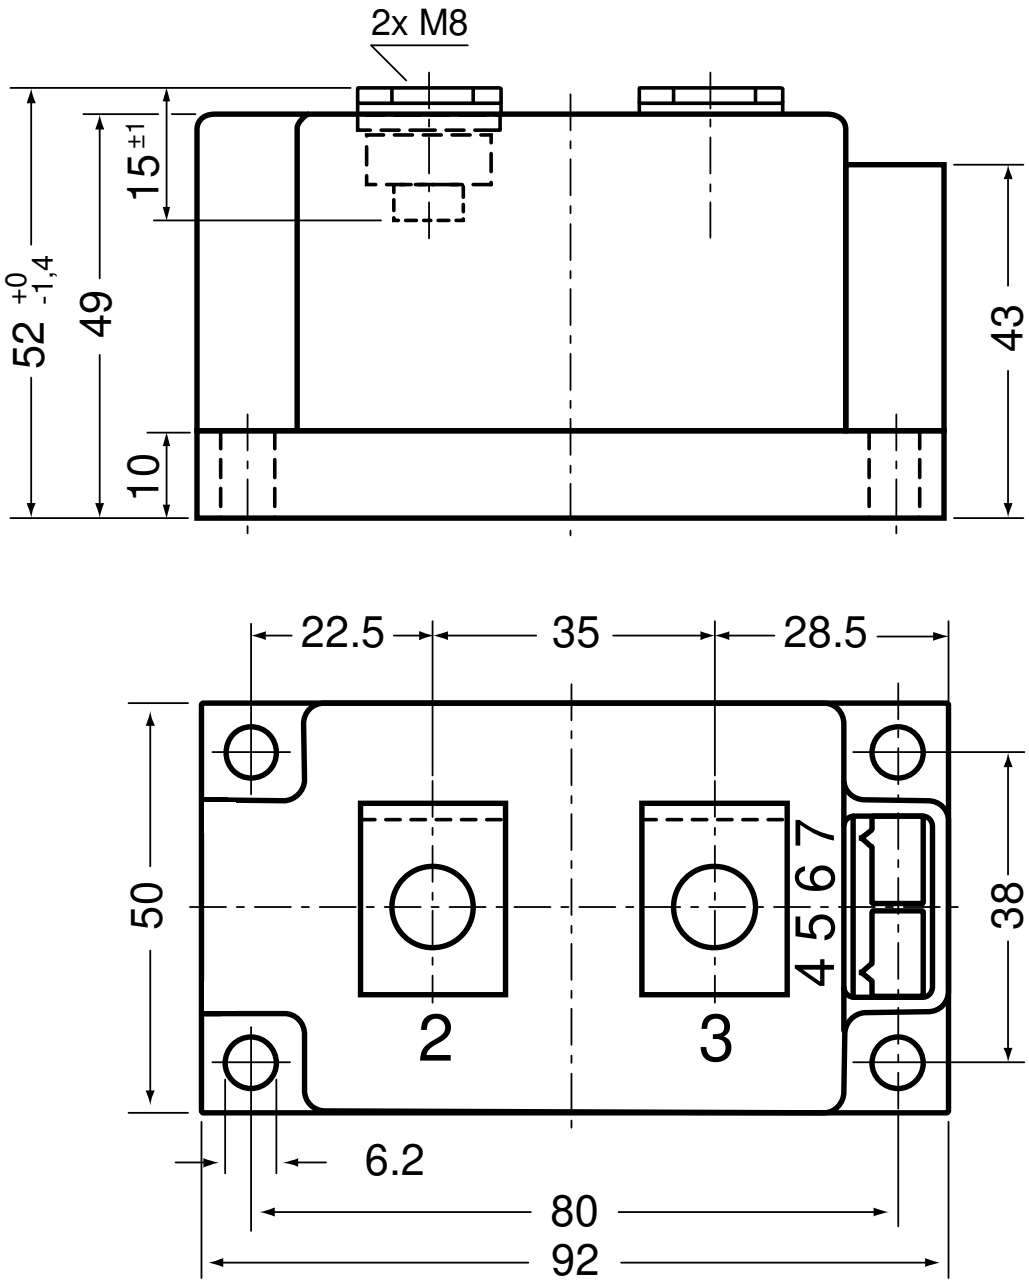



© 2022 IXYS all rights reserved

Rectifier

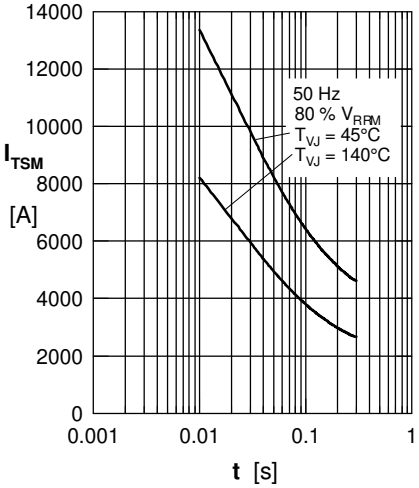

Fig. 1 Surge overload current
I_{FSM}: Crest value, t: duration

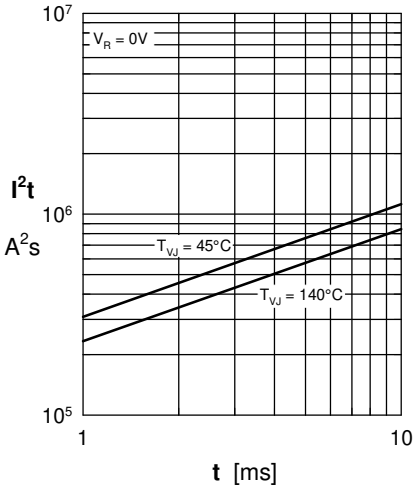

Fig. 2 I^2t versus time (1-10 ms)

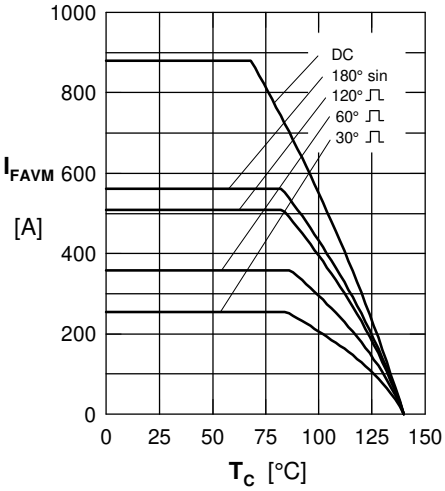

Fig. 3 Maximum forward current at case temperature

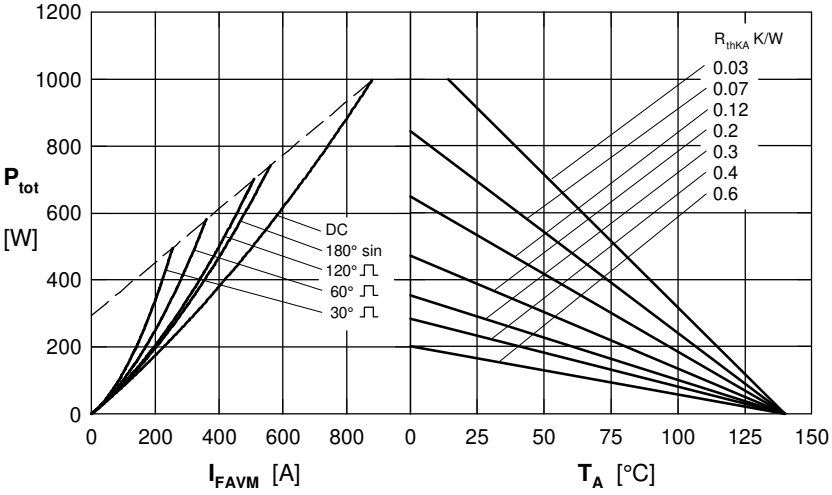

Fig. 4 Power dissipation vs. forward current and ambient temperature

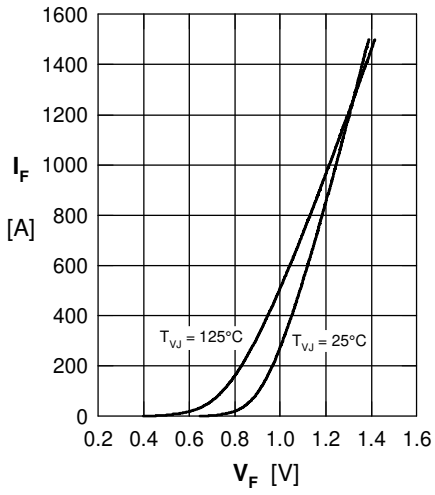

Fig. 5 Forward current
I_F versus V_F

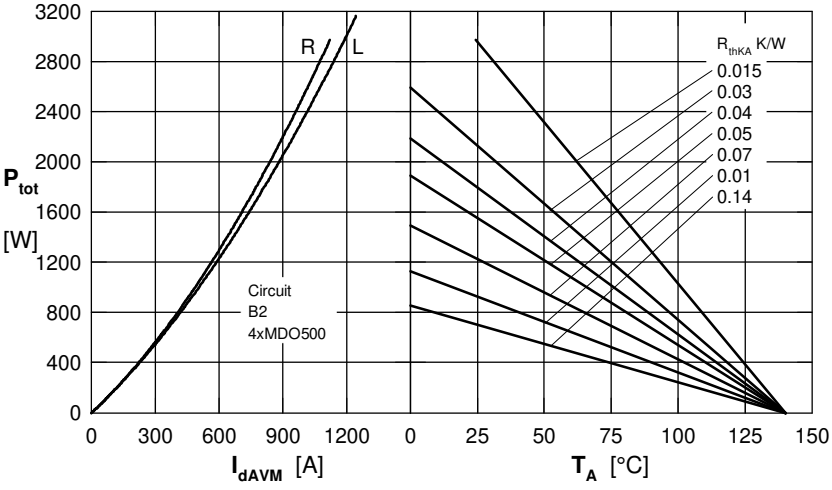

Fig. 6 Single phase rectifier bridge: Power dissipation vs. direct output current and ambient temperature. R = resistive load, L = inductive load

© 2022 IXYS all rights reserved

Rectifier

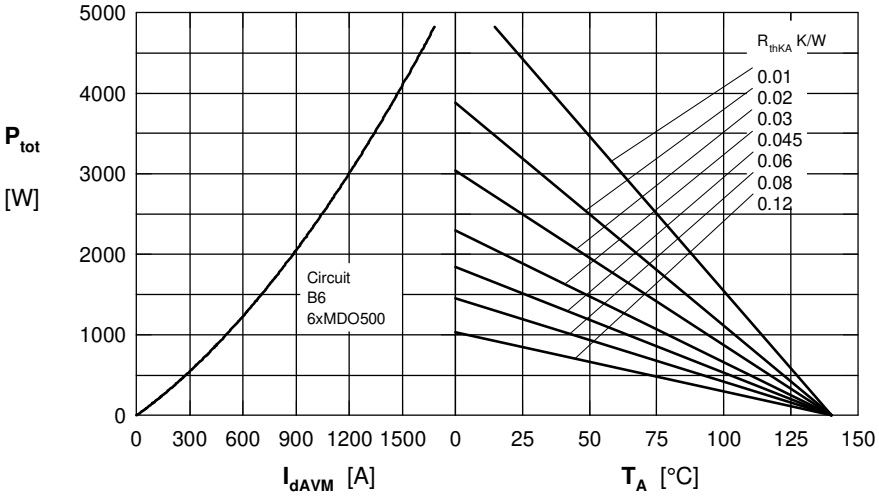

Fig. 6 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

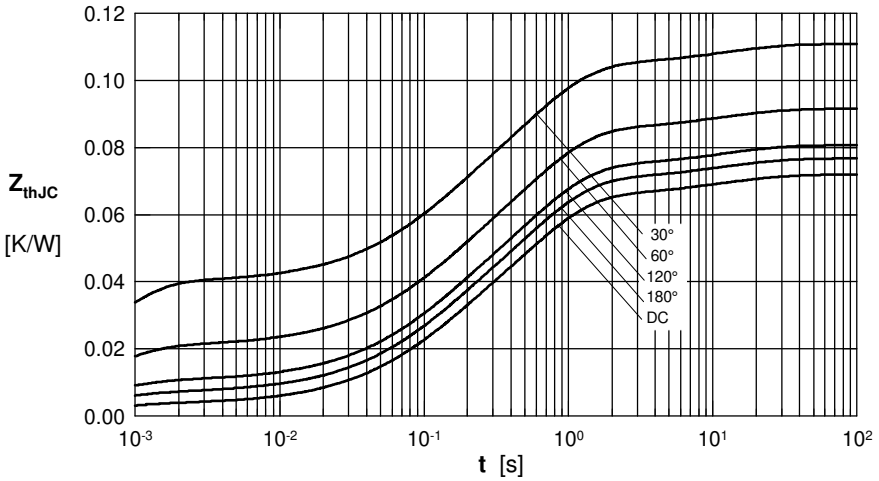

R_{thJC} for various conduction angles d:

d	R_{thJC} (K/W)
DC	0.072
180°	0.0768
120°	0.081
60°	0.092
30°	0.111

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0035	0.0054
2	0.0186	0.098
3	0.0432	0.54
4	0.0067	12

Fig. 7 Transient thermal impedance junction to case

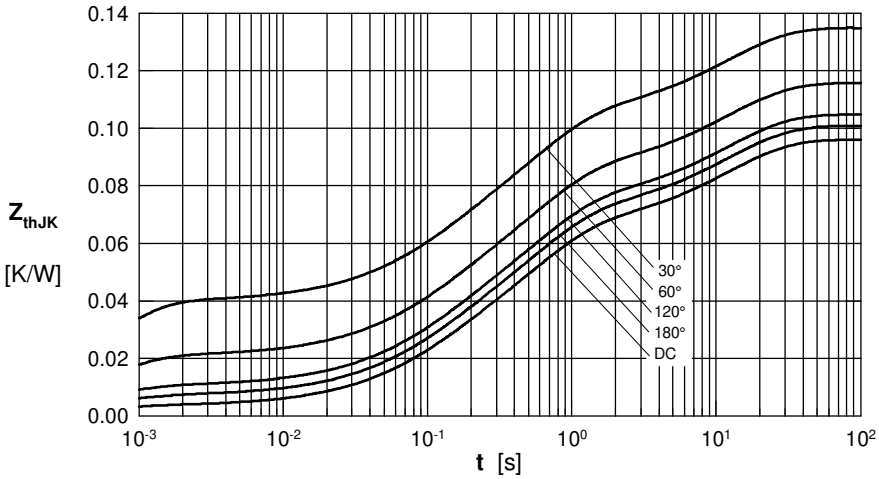

R_{thJK} for various conduction angles d:

d	R_{thJK} (K/W)
DC	0.096
180°	0.1
120°	0.105
60°	0.116
30°	0.135

Constants for Z_{thJK} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0035	0.0054
2	0.0186	0.098
3	0.0432	0.54
4	0.0067	12
5	0.024	12

Fig. 8 Transient thermal impedance junction to heatsink

© 2022 IXYS all rights reserved