

	REVISION					
REV	DATE	DESCRIPTION				
Α	6/25/18	519469GCP - RELEASE PER EM3026 MRY				
В	3/31/22	524923ECP/D - ADD TOLERANCES MRY				

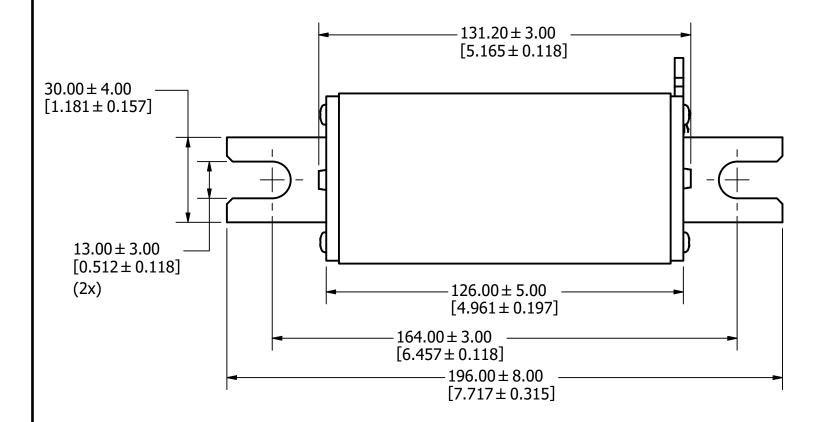

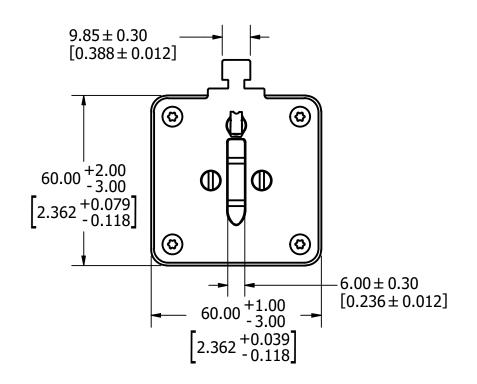

•	DEN	IOTES CRITICAL CHARA	CTERISTICS.			
CPK	DEN	IOTES CPK DIMENSIONS	S, -MINIMUM CPK VALUE			
⟨ST⟩	OF I	NOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT D TRACKING TO BE DEFINED IN TELFUSE INSPECTION INSTRUCTIONS.				
CP DENOTES CP DIMENSIONS, MUST BE WITHIN THE DIM SHOWN ON DRAWING AND ALLOW FOR MAXIMUM TOO			ENSIONAL LIMITATIONS INITIALLY LOCATED TO			
MATL SPEC			FINISH			
DRW MYORK		DATE 4/18/2018	SCALE NTS	FINISH GOOD WT GRAMS/PIECE		
LINI ECC OTHEDWICE CRECIETED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN						

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

3RD ANGLE PROJECTION

TITLE

1500VDC SIZE 2XL W/ U-BLADE PHOTOVOLTAIC FUSE W/ MICROSWITCH INTERFACE OUTLINE

14 Littelfuse
CHICAGO, ILLINOIS 60631

REVISION DRWG NO.

OL-SPNH.X2XLDEMS