CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

PART NUMBER	COVER OPENINGS
04980920ZXT	A D

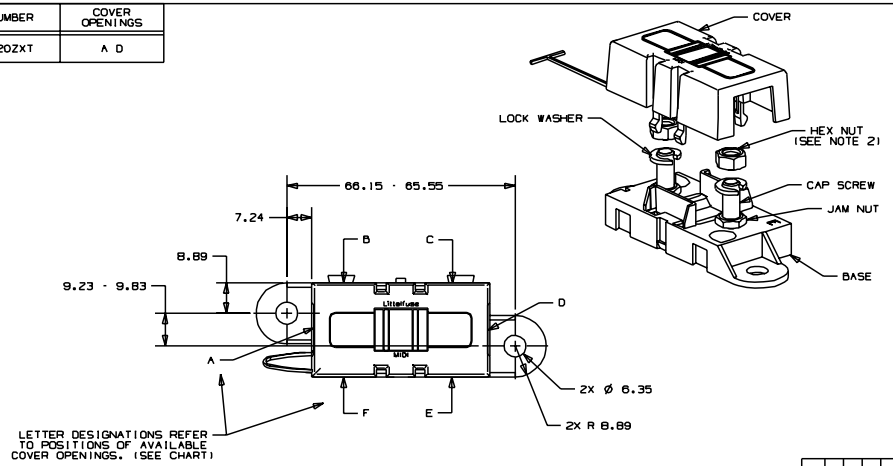

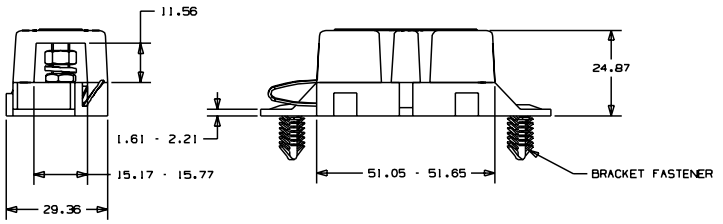

NOTES:

1. TAB COVER TIE IS INSERTED INTO HOLE IN BASE.
2. TORQUE REQUIRED FOR HEX NUT TO BE 4.0 - 5.0 NEWTON METERS [35-44 IN-LBS].

METRIC
ASSEMBLY

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE WHICH IS WITHIN THE FUNCTIONAL LIMITS AS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

COPIES TO

1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

MATL SPEC
FINISH
DRW GWB DATE 01/12/10
CHK DATE
APPD DATE

SCALE 1:1
SUPER DR
FINSH GOOD WT GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-mK)				
DIMENSION	0.5 - 3	3 - 6	6 - 30	30 - 120	120 - 400
TOLERANCE	±0.1	±0.11	±0.2	±0.3	±0.5

3RD ANGLE PROJECTION

TITLE
HOLDER - MIDI

Littelfuse
DES PLAINES, ILLINOIS 60016

LTR	DATE	REVISION	CHK	APD
A	01/12/10	SA73-RELEASE GWB		

REVISION A
DRWG. NO. OL-04980920ZXT
OUTLINE