

APPLICABLE SAE STANDARD OR RECOMMENDED PRACTICE SAE J259

956-5109

FACE NUT, ALUMINUM
 LEVER, ZINC DIE CAST, CHROME PLT.
 HOUSING, ZINC DIE CAST
 MARK PART NO. & DATE CODE AT RANDOM (N)




1.57 DIA. x 1.01 HIGH PIN

SCREW, # 8-32, & LOCKWASHER
 4 REQ'D (M)

MM
 0.001
 0.002
 0.005
 0.010
 0.020
 0.030
 0.040
 0.050
 0.062
 0.080
 0.090
 0.100
 0.125
 0.150
 0.160
 0.170
 0.180
 0.200
 0.250
 0.300
 0.375
 0.450
 0.500

46.48
 46.99
 13.66

11 P.M. 9-28-71
 -3X-16009C

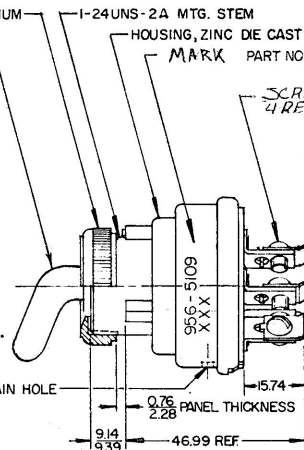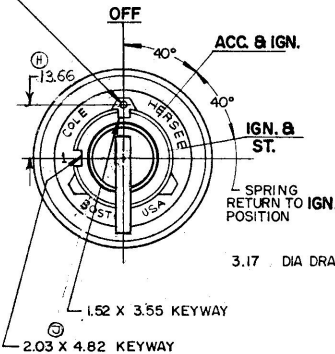

NOTE:
 1. TERMINAL INSULATOR GASKET SEALED
 2. SHOULDER TYPE RIVET CONSTRUCTION
 3. SILVER LAMINATED CONTACT SURFACES
 4. ALL STEEL PARTS PLATED

METRIC

Confidential Property of Cole Hersee

DO NOT SCALE

LET	WAS	DATE	BY	LET	WAS	DATE	BY	MATERIAL	DRAWN	CHECKED	APPROVED	SCALE	DATE DRAWN
				L	ZINC	25034	12/29/70	54	—	RW	1-30-71	1:1	9-16-71
				K	ECN	25189	8/13/72	54	FINISH				
				J	DELTA NOTE	23263	9-30-86	ZU	—				DATE BLUEPRINT
N	ECN #00422	6/6/08	MK	H	REVISED	22457	6/6/04	1/4X	TOLERANCES	3 - POSITION IGNITION & START SWITCH			956-5109
M	ECN 00137	3/1/00	WH	G	REDRAWN		1-19-78	FRACTIONAL ± DECIMAL ±.25					

CH Cole Hersee Co.
 HEADQUARTERS: MILWAUKEE, WISCONSIN

ALL EXCEPT 3-POS
 & W/SCREW TERM. &
 LEVER