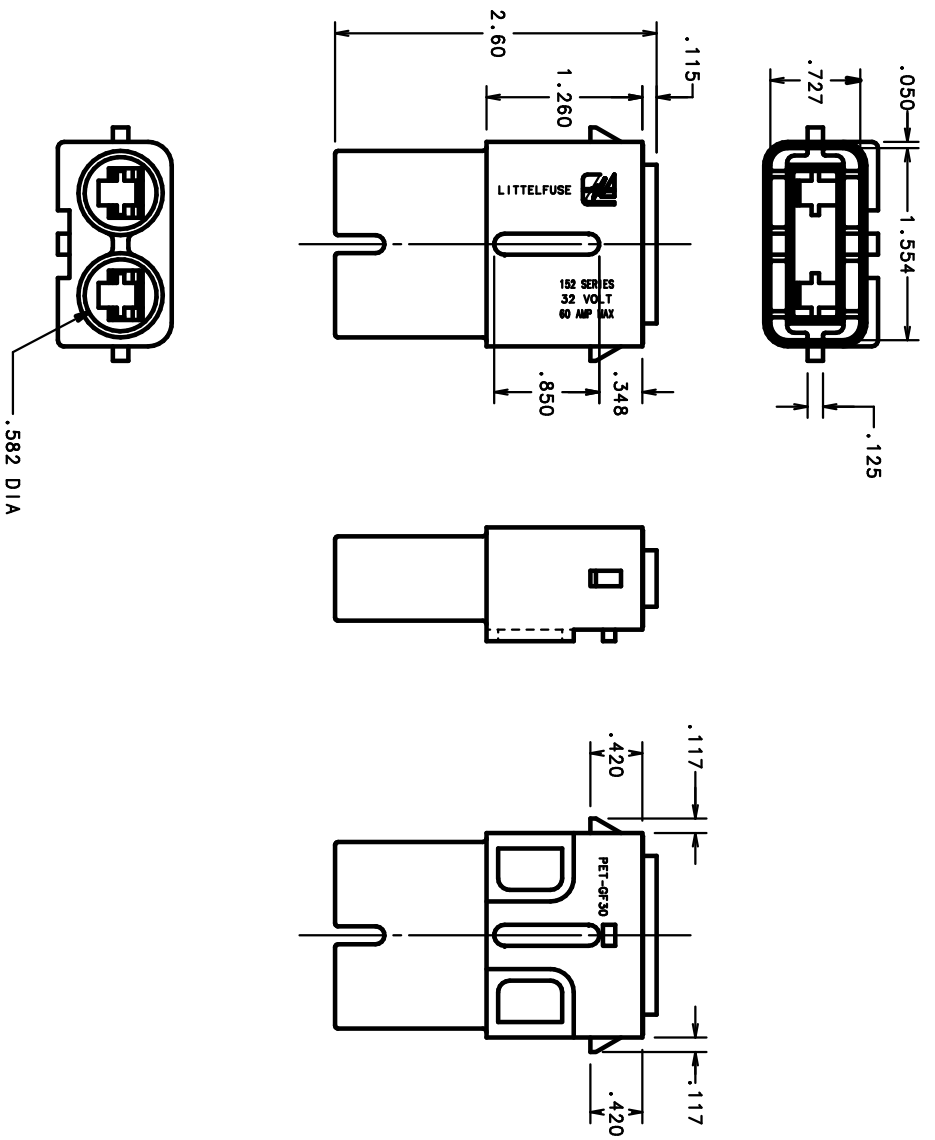

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◊	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

UNCONTROLLED DOCUMENT

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

LTR	REVISION	CHK	APD
A	61372 - RELEASED 2/11/04		JMB

COPIES TO

1 9 18
2 10 19
3 12 20
4 13 21
5 14 23
6 15 33
7 16 43
8 17 53

MATL SPEC: BLACK RYNITE
FINISH: EDM FINISH

DRW	DATE	SCALE
JMB	2/11/04	1:1
CHK	DATE	SUPER DRW
APPD	DATE	RAW STK WT LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE
BODY: NO MOUNTING TABS
SPLASH-PROOF MAXI FUSE HOLDER

Littelfuse
DES PLAINES, ILLINOIS 60016

REVISION: A
DRWG. NO. OUTLINE 01520006Z

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED