

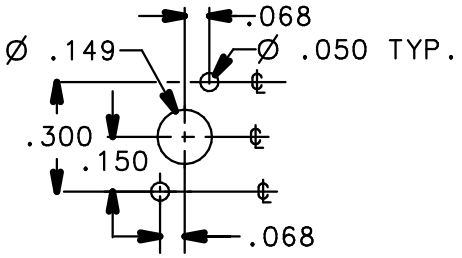

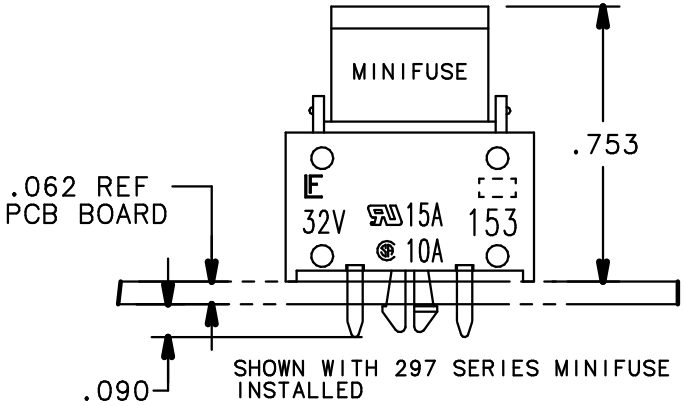

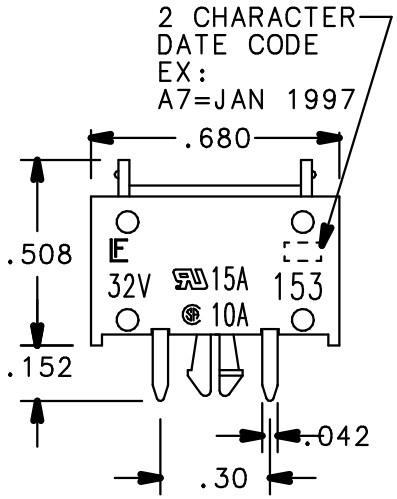

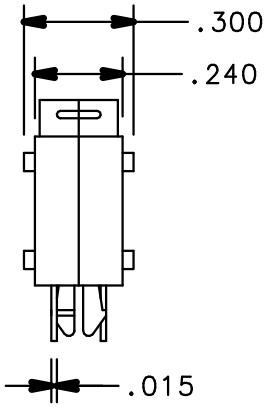

MATERIAL:
BODY-GREY GLASS FILLED NYLON (UL94VO)
CLIP-BeCu, TIN PLATE FINISH

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.	
O	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE
⟨ST⟩	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

LTR	REVISION	CHK	APD
B	38977C-REVISE & REDRAWN IN NEW STRUCTURE 2/24/98 KAM		

COPIES TO

1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

MATL SPEC		FINISH
DRW KAM	DATE 1/21/98	SCALE 2:1
CHK	DATE	SUPER DRW
APPD	DATE	RAW STK WT

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTIONAL
THREE PLACE DEC ±.005 ANGULAR

TITLE
MINIFUSE VERTICAL MOUNT
PCB FUSEHOLDER

Littelfuse®
DES PLAINES, ILLINOIS 60016

DWG. NO. 01530016Z
OUTLINE

UNCONTROLLED DOCUMENT

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED