CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

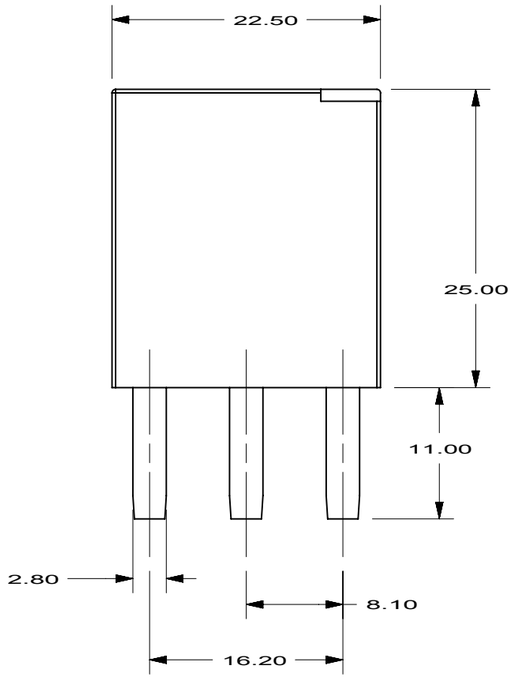

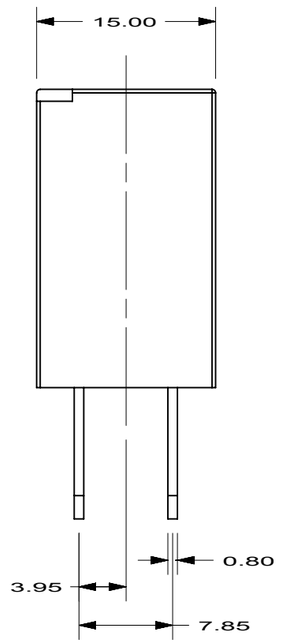

METRIC

COMPONENT

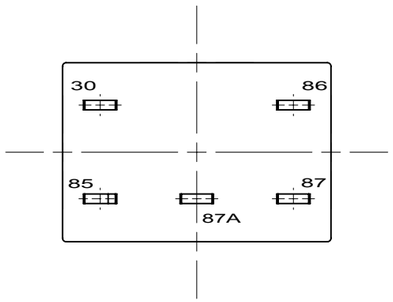

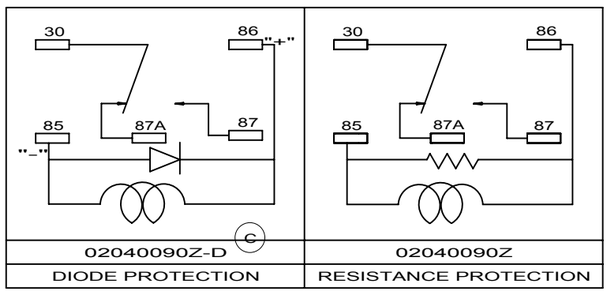

NOTES:
1). RATING: NO: 14Vdc/35A
NC: 14Vdc/20A
2). TEMPERATURE RANGE: -40C TO 125C
3). RELAY IS FLUX-TIGHT.
4). ALL DIMENSIONS SHOWN FOR REFERENCE ONLY.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
		BILL OF MATERIAL		

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎ DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

COPIES TO

1	9	18	2	10	19	3	12	20
4	13	21	5	14	23	6	15	33
7	16	43	8	17	53			

MATL SPEC

FINISH

		SCALE	2:1
DRW	CAD	DATE	06/24/09
CHK		DATE	
APPD		DATE	

SUPER DR

FINSH GOOD WT GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)

	UP TO 3	OVER 3 - 6	UP TO 6 - 30	OVER 30 - 120	UP TO 120 - 400
DIMENSION	±0.05	±0.05	±0.1	±0.15	±0.2
TOLERANCE					

3RD ANGLE PROJECTION

TITLE
SINGLE POLE, DOUBLE THROW
MICRO RELAY

Littelfuse
DES PLAINES, ILLINOIS 60016

REVISION C

DRWG. NO. 02040090Z

LTR	DATE	REVISION	CHK	APD
A	06/24/09	000716ER RELEASED	CAD	
B	08/08/11	503010ERA-SEE ERN GMB		
C	04/18/12	504753ECA ADD DIODE VERSION EJIN		