


### SIDACtor® Series - DO-15

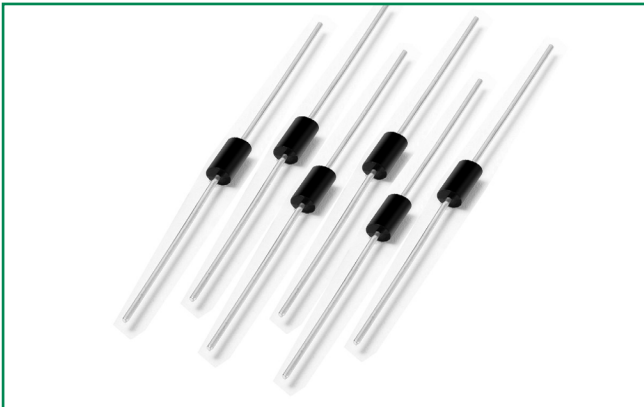

#### Agency Approvals

| Agency  | Agency File Number |
|---|--------------------|
|  | E133083            |

#### Pinout Designation

Not Applicable

#### Schematic Symbol



#### Description

The DO-15 series are designed to protect baseband equipment such as modems, line cards, CPE and DSL from damaging overvoltage transients.

The series provides a cost-effective through-hole solution that enables equipment to comply with global regulatory standards.

#### Features and Benefits

- Low voltage overshoot
- Low on-state voltage
- Does not degrade surge capability after multiple surge events within limit.
- Low capacitance
- Fails short circuit when surged in excess of ratings
- 2nd level interconnect is Pb-free per IPC/ JEDEC J-STD-609A.01
- RoHS compliant, lead-free and halogen-free.

#### Applicable Global Standards

- TIA-968-A
- TIA-968-B
- ITU K.20/21/45 Enhanced Level\*
- ITU K.20/21/45 Basic Level
- GR 1089 Inter-building\*
- GR 1089 Intra-building
- IEC 61000-4-5 2nd edition
- YD/T 1082
- YD/T 993
- YD/T 950

\* A/B-rated parts require series resistance

#### Electrical Characteristics

| Part Number | Marking | $V_{DRM}$<br>@ $I_{DRM}=5\mu A$ | $V_S$<br>@ 100V/ $\mu s$ | $I_H$  | $I_S$  | $I_T$ | $V_T$<br>@ $I_T=2.2$ Amps | Capacitance<br>@ 1MHz, 2V bias |        |
|-------------|---------|---------------------------------|--------------------------|--------|--------|-------|---------------------------|--------------------------------|--------|
|             |         | V min                           | V max                    | mA min | mA max | A max | V max                     | pF min                         | pF max |
| P0080GALRP  | P-8A    | 6                               | 25                       | 50     | 800    | 2.2   | 4                         | 10                             | 30     |
| P1100GALRP  | P11A    | 90                              | 130                      | 150    | 800    | 2.2   | 5                         | 30                             | 60     |
| P1300GALRP  | P13A    | 120                             | 160                      | 150    | 800    | 2.2   | 5                         | 25                             | 40     |
| P1500GALRP  | P15A    | 140                             | 180                      | 150    | 800    | 2.2   | 5                         | 25                             | 40     |
| P1800GALRP  | P18A    | 170                             | 220                      | 150    | 800    | 2.2   | 5                         | 25                             | 40     |
| P2300GALRP  | P23A    | 190                             | 260                      | 150    | 800    | 2.2   | 5                         | 25                             | 30     |
| P2600GALRP  | P26A    | 220                             | 300                      | 150    | 800    | 2.2   | 5                         | 25                             | 30     |
| P3100GALRP  | P31A    | 275                             | 350                      | 150    | 800    | 2.2   | 5                         | 10                             | 20     |
| P3500GALRP  | P35A    | 320                             | 400                      | 150    | 800    | 2.2   | 5                         | 20                             | 30     |
| P1100GBLRP  | P11B    | 90                              | 130                      | 150    | 800    | 2.2   | 5                         | 30                             | 60     |
| P1300GBLRP  | P13B    | 120                             | 160                      | 150    | 800    | 2.2   | 5                         | 25                             | 40     |
| P1500GBLRP  | P15B    | 140                             | 180                      | 150    | 800    | 2.2   | 5                         | 25                             | 40     |
| P1800GBLRP  | P18B    | 170                             | 220                      | 150    | 800    | 2.2   | 5                         | 25                             | 40     |
| P2300GBLRP  | P23B    | 190                             | 260                      | 150    | 800    | 2.2   | 5                         | 25                             | 30     |
| P2600GBLRP  | P26B    | 220                             | 300                      | 150    | 800    | 2.2   | 5                         | 25                             | 30     |
| P3100GBLRP  | P31B    | 275                             | 350                      | 150    | 800    | 2.2   | 5                         | 20                             | 30     |
| P3500GBLRP  | P35B    | 320                             | 400                      | 150    | 800    | 2.2   | 5                         | 20                             | 30     |
| P4500GBLRP  | P45B    | 400                             | 530                      | 150    | 800    | 2.2   | 5                         | 20                             | 45     |
| P4500GCLRP  | P45C    | 400                             | 530                      | 50     | 800    | 2.2   | 5                         | 20                             | 45     |

Notes:  
 - Absolute maximum ratings measured at  $T_A = 25^\circ C$  (unless otherwise noted).  
 - Components are bi-directional.

### Surge Ratings

| Series | I <sub>PP</sub>                            |  |   | I <sub>TSM</sub> |
|--------|--|--|---|------------------|
|        | 10/560 <sup>1</sup><br>10/560 <sup>2</sup> | 10/1000 <sup>1</sup><br>10/1000 <sup>2</sup> | 5/310 <sup>1</sup><br>10/700 <sup>2</sup> | 50 / 60 Hz       |
|        | Amps min                                   | Amps min                                     | Amps min                                  | Amps min         |
| A      | 50   | 45   | -   | 20               |
| B      | 100  | 80   | 100                                       | 25               |
| C      | -  | -  | 150                                       | 25               |

Notes:

1 Current waveform in  $\mu$ s


2 Voltage waveform in  $\mu$ s

- Peak pulse current rating (I<sub>pp</sub>) is repetitive and guaranteed for the life of the product that remains in thermal equilibrium.

- I<sub>pp</sub> ratings applicable over temperature range of -40 to +85°C


- The component must initially be in thermal equilibrium with -40°C ≤ T<sub>j</sub> ≤ +150°C

### Thermal Considerations

| Package  | Symbol           | Parameter                               | Value       | Unit |
|--|------------------|---|-------------|------|
|  DO-15 | T <sub>J</sub>   | Operating Junction Temperature Range    | -40 to +150 | °C   |
|  | T <sub>S</sub>   | Storage Temperature Range               | -65 to +150 | °C   |
|  | R <sub>θJA</sub> | Thermal Resistance: Junction to Ambient | 60          | °C/W |

### Soldering Parameters

|  |  |                               |
|--|--|-------------------------------|
| Reflow Condition   |  | Pb-Free assembly (see Fig. 1) |
| Pre Heat   | - Temperature Min (T <sub>s(min)</sub> )   | +150°C                        |
|  | - Temperature Max (T <sub>s(max)</sub> )   | +200°C                        |
|  | - Time (Min to Max) (t <sub>s</sub> )      | 60-180 secs.                  |
| Average ramp up rate (Liquidus Temp (T <sub>L</sub> ) to peak) |  | 3°C/sec. Max.                 |
| T <sub>S(max)</sub> to T <sub>L</sub> - Ramp-up Rate           |  | 3°C/sec. Max.                 |
| Reflow   | - Temperature (T <sub>L</sub> ) (Liquidus) | +217°C                        |
|  | - Temperature (t <sub>L</sub> )            | 60-150 secs.                  |
| Peak Temp (T <sub>p</sub> )                                    |  | +260(+0/-5)°C                 |
| Time within 5°C of actual Peak Temp (t <sub>p</sub> )          |  | 30 secs. Max.                 |
| Ramp-down Rate   |  | 6°C/sec. Max.                 |
| Time 25°C to Peak Temp (T <sub>p</sub> )                       |  | 8 min. Max.                   |
| Do not exceed  |  | +260°C                        |

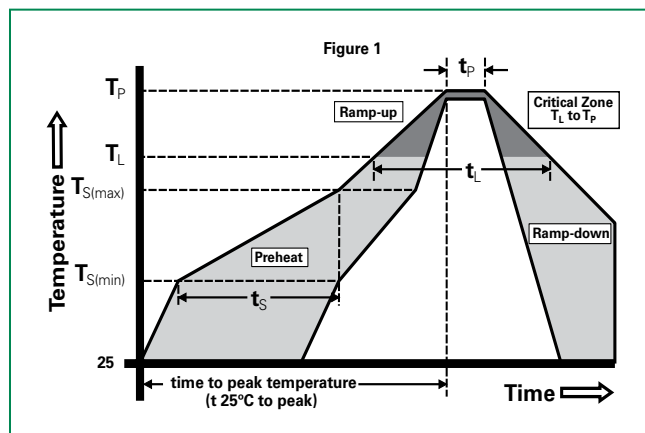

### Additional Information



Datasheet



Resources




Samples


### Physical Specifications

|                 |   |
|-----------------|---|
| Lead Material   | Copper Alloy  |
| Terminal Finish | 100% Matte-Tin Plated                                       |
| Body Material   | UL recognized epoxy meeting flammability classification V-0 |


**Part Marking**

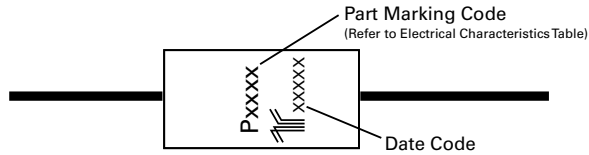

**Part Numbering**

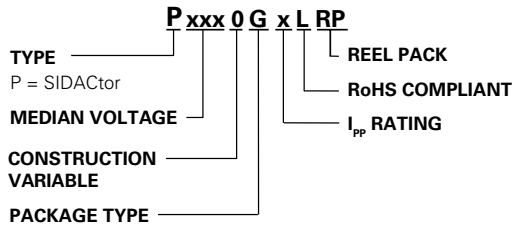

**Dimensions – DO-15**

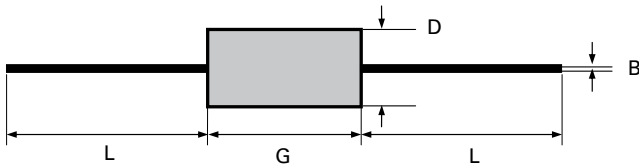

| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | MIN    | MAX   | MIN         | MAX   |
| <b>B</b>  | 0.028  | 0.034 | 0.711       | 0.864 |
| <b>D</b>  | 0.12   | 0.14  | 3.048       | 3.556 |
| <b>G</b>  | 0.235  | 0.27  | 5.969       | 6.858 |
| <b>L</b>  | 1      |       | 25.4        |       |


**Packing Options**

| Package Type | Description             | Quantity | Added Suffix | Industry Standard |
|--------------|-------------------------|----------|--------------|-------------------|
| G            | DO-15 Axial Tape & Reel | 5000     | RP           | EIA-RS-296-D      |

**Environmental Specifications**

|   |  |
|---|--|
| <b>High Temp Voltage Blocking</b>       | 80% Rated $V_{DRM}$ ( $V_{AC Peak}$ ) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| <b>Temp Cycling</b>                     | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A104                  |
| <b>Biased Temp &amp; Humidity</b>       | 52 $V_{DC}$ (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101   |
| <b>High Temp Storage</b>                | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101   |
| <b>Low Temp Storage</b>                 | -65°C, 1008 hrs.   |
| <b>Thermal Shock</b>                    | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106                |
| <b>Autoclave (Pressure Cooker Test)</b> | +121°C, 100%RH, 2atm, 24 up to 168 hrs. EIA/JEDEC, JESD22-A-102  |
| <b>Resistance to Solder Heat</b>        | +260°C, 30 secs. MIL-STD-750 (Method 2031)   |
| <b>Moisture Sensitivity Level</b>       | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1  |

**Tape and Reel Specification – DO-15**

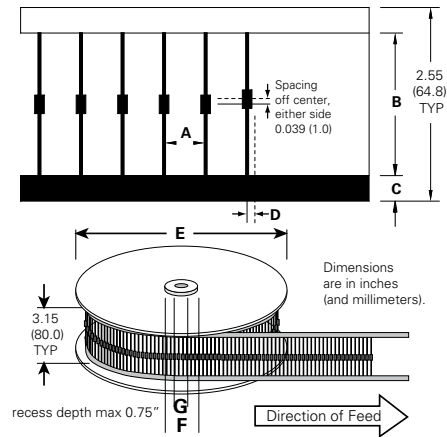

| Symbols  | Description                      | Inches         | MM            |
|----------|----------------------------------|----------------|---------------|
| <b>A</b> | Component Spacing (lead to lead) | 0.200 ± 0.020" | 5.08 ± 0.508  |
| <b>B</b> | Inner Tape Pitch                 | 2.062 ± 0.059" | 52.37 ± 1.498 |
| <b>C</b> | Tape Width                       | 0.250"         | 6.35          |
| <b>D</b> | Max. Off Alignment               | 0.048"         | 1.219         |
| <b>E</b> | Reel Dimension                   | 13"            | 330.2         |
| <b>F</b> | Max. Hub Recess                  | 3"             | 76.19         |
| <b>G</b> | Max. Arbor Hole                  | 0.68"          | 17.27         |

**Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).**