

5.0SMDJxxS-HRA

Surface Mount – 5000W – DO-214AB



Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
| | E230531 |

Maximum Ratings and Thermal Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|--|-----------------|------------|--------------------|
| Peak Pulse Power Dissipation by 10/1000 μs Waveform (Fig.1)(Note 1), (Note 2) | P_{PPM} | 5000 | W |
| Power dissipation on infinite heatsink at $T_A = 50^\circ\text{C}$ | $P_{M(AV)}$ | 6.5 | W |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3) | I_{FSM} | 300 | A |
| Maximum Instantaneous Forward Voltage at 100A for Unidirectional only | V_F | 3.5 | V |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | -65 to 150 | $^\circ\text{C}$ |
| Typical Thermal Resistance Junction to Lead | $R_{\theta JL}$ | 15 | $^\circ\text{C/W}$ |
| Typical Thermal Resistance Junction to Ambient | $R_{\theta JA}$ | 75 | $^\circ\text{C/W}$ |

Notes:

- Non-repetitive current pulse, per Fig. 4 and derated above T_J (initial) = 25°C per Fig. 3.
- Voltage of 6.0V–60V products's peak pulse power dissipation is 5000W, and 64V and 70V is 4500W. Bidirectional products 33V–58V are also 4500W.
- Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional components only, duty cycle=4 per minute maximum.
- Mounted on copper pad area of 0.31x0.31" (8.0 x 8.0mm) to each terminal.

Functional Diagram



Description

The 5.0SMDJxxS-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of upscreening options for enhanced reliability.

Features

- High reliability devices with fabrication and assembly lots traceability
- Enhanced reliability screening options are available in reference to MIL-PRF-19500. Refer to screen process table for more detail on screening options
- For surface mounted applications in order to optimize board space
- Low profile package
- Built-in strain relief
- $V_{BR} @ T_J = V_{BR} @ 25^\circ\text{C} \times (1 + \alpha T \times (T_J - 25))$ (α : Temperature Coefficient)
- Glass passivated chip junction
- 5000W peak pulse power capability at 10/1000 μs waveform, repetition rate (duty cycles): 0.01%
- Fast response time: typically less than 1.0ps from 0V to $V_{BR \text{ min}}$
- Excellent clamping capability
- Low incremental surge resistance
- Typical I_r less than 2 μA above 12V
- High Temperature soldering guaranteed: 260 $^\circ\text{C}$ /40 seconds at terminals
- Plastic package has Underwriters laboratory flammability 94V-O
- Meet MSL level1, per J-STD-020, LF maximum peak of 260 $^\circ\text{C}$
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- 2nd level interconnect is Pb-free per IPC/JEDEC J-STD-609A.01
- Recognized to UL 497B as an Isolated Loop Circuit Protector


Applications

5.0SMDJxxS-HRA components are ideal for the high reliability protection of I/O Interfaces, VCC bus and other vulnerable circuits.

5.0SMDJxxS-HRA

Surface Mount – 5000W – DO-214AB

Electrical Characteristics (T_A=25°C unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Marking | | Reverse Stand off Voltage V _R (Volts) | Breakdown Voltage V _{BR} (Volts) @ I _T | | Test Current I _T (mA) | Maximum Clamping Voltage V _C @ I _{pp} (V) | Maximum Peak Pulse Current I _{pp} (A) | Maximum Reverse Leakage I _R @ V _R (µA) | Agency Approval  |
|-------------------|-------------------|---------|-------|--|--|------|----------------------------------|---|--|--|---|
| | | UNI | BI | | MIN | MAX | | | | | |
| 5.0SMDJ6.0AS-HRA | 5.0SMDJ6.0CAS-HRA | 5PABH | 5BABH | 6.0 | 6.67 | 7.37 | 10 | 10.3 | 485.4 | 800.0 | X |
| 5.0SMDJ6.5AS-HRA | 5.0SMDJ6.5CAS-HRA | 5PAEH | 5BAEH | 6.5 | 7.22 | 7.98 | 10 | 11.2 | 446.4 | 500.0 | X |
| 5.0SMDJ7.0AS-HRA | 5.0SMDJ7.0CAS-HRA | 5PAFH | 5BAFH | 7.0 | 7.78 | 8.60 | 10 | 12.0 | 416.7 | 200.0 | X |
| 5.0SMDJ7.5AS-HRA | 5.0SMDJ7.5CAS-HRA | 5PAGH | 5BAGH | 7.5 | 8.33 | 9.21 | 1 | 12.9 | 387.6 | 100.0 | X |
| 5.0SMDJ8.0AS-HRA | 5.0SMDJ8.0CAS-HRA | 5PAKH | 5BAKH | 8.0 | 8.89 | 9.83 | 1 | 13.6 | 367.6 | 50.0 | X |
| 5.0SMDJ8.5AS-HRA | 5.0SMDJ8.5CAS-HRA | 5PAMH | 5BAMH | 8.5 | 9.44 | 10.4 | 1 | 14.4 | 347.2 | 20.0 | X |
| 5.0SMDJ9.0AS-HRA | 5.0SMDJ9.0CAS-HRA | 5PAPH | 5BAPH | 9.0 | 10.0 | 11.1 | 1 | 15.4 | 324.7 | 10.0 | X |
| 5.0SMDJ10AS-HRA | 5.0SMDJ10CAS-HRA | 5PARH | 5BARH | 10.0 | 11.1 | 12.3 | 1 | 17.0 | 294.1 | 5.0 | X |
| 5.0SMDJ11AS-HRA | 5.0SMDJ11CAS-HRA | 5PATH | 5BATH | 11.0 | 12.2 | 13.5 | 1 | 18.2 | 274.7 | 2.0 | X |
| 5.0SMDJ12AS-HRA | 5.0SMDJ12CAS-HRA | 5PAVH | 5BAVH | 12.0 | 13.3 | 14.7 | 1 | 19.9 | 251.3 | 2.0 | X |
| 5.0SMDJ13AS-HRA | 5.0SMDJ13CAS-HRA | 5PAXH | 5BAXH | 13.0 | 14.4 | 15.9 | 1 | 21.5 | 232.6 | 2.0 | X |
| 5.0SMDJ14AS-HRA | 5.0SMDJ14CAS-HRA | 5PAZH | 5BAZH | 14.0 | 15.6 | 17.2 | 1 | 23.2 | 215.5 | 2.0 | X |
| 5.0SMDJ15AS-HRA | 5.0SMDJ15CAS-HRA | 5PBEH | 5BBEH | 15.0 | 16.7 | 18.5 | 1 | 24.4 | 204.9 | 2.0 | X |
| 5.0SMDJ16AS-HRA | 5.0SMDJ16CAS-HRA | 5PBGH | 5BBGH | 16.0 | 17.8 | 19.7 | 1 | 26.0 | 192.3 | 2.0 | X |
| 5.0SMDJ17AS-HRA | 5.0SMDJ17CAS-HRA | 5PBKH | 5BBKH | 17.0 | 18.9 | 20.9 | 1 | 27.6 | 181.2 | 2.0 | X |
| 5.0SMDJ18AS-HRA | 5.0SMDJ18CAS-HRA | 5PBMH | 5BBMH | 18.0 | 20.0 | 22.1 | 1 | 29.2 | 171.2 | 2.0 | X |
| 5.0SMDJ20AS-HRA | 5.0SMDJ20CAS-HRA | 5PBPH | 5BBPH | 20.0 | 22.2 | 24.5 | 1 | 32.4 | 154.3 | 2.0 | X |
| 5.0SMDJ22AS-HRA | 5.0SMDJ22CAS-HRA | 5PBRH | 5BBRH | 22.0 | 24.4 | 26.9 | 1 | 35.5 | 140.8 | 2.0 | X |
| 5.0SMDJ24AS-HRA | 5.0SMDJ24CAS-HRA | 5PBTH | 5BBTH | 24.0 | 26.7 | 29.5 | 1 | 38.9 | 128.5 | 2.0 | X |
| 5.0SMDJ26AS-HRA | 5.0SMDJ26CAS-HRA | 5PBVH | 5BBVH | 26.0 | 28.9 | 31.9 | 1 | 42.1 | 118.8 | 2.0 | X |
| 5.0SMDJ28AS-HRA | 5.0SMDJ28CAS-HRA | 5PBXH | 5BBXH | 28.0 | 31.1 | 34.4 | 1 | 45.4 | 110.1 | 2.0 | X |
| 5.0SMDJ30AS-HRA | 5.0SMDJ30CAS-HRA | 5PBZH | 5BBZH | 30.0 | 33.3 | 36.8 | 1 | 48.4 | 103.3 | 2.0 | X |
| 5.0SMDJ33AS-HRA | - | 5PCBH | - | 33.0 | 36.7 | 40.6 | 1 | 53.3 | 93.9 | 2.0 | X |
| - | 5.0SMDJ33CAS-HRA | - | 5BCBH | 33.0 | 36.7 | 40.6 | 1 | 53.3 | 84.4 | 2.0 | X |
| 5.0SMDJ36AS-HRA | - | 5PCEH | - | 36.0 | 40.0 | 44.2 | 1 | 58.1 | 86.1 | 2.0 | X |
| - | 5.0SMDJ36CAS-HRA | - | 5BCEH | 36.0 | 40.0 | 44.2 | 1 | 58.1 | 77.5 | 2.0 | X |
| 5.0SMDJ40AS-HRA | - | 5PCFH | - | 40.0 | 44.4 | 49.1 | 1 | 64.5 | 77.6 | 2.0 | X |
| - | 5.0SMDJ40CAS-HRA | - | 5BCFH | 40.0 | 44.4 | 49.1 | 1 | 64.5 | 69.8 | 2.0 | X |
| 5.0SMDJ43AS-HRA | - | 5PCGH | - | 43.0 | 47.8 | 52.8 | 1 | 69.4 | 72.1 | 2.0 | X |
| - | 5.0SMDJ43CAS-HRA | - | 5BCGH | 43.0 | 47.8 | 52.8 | 1 | 69.4 | 64.8 | 2.0 | X |
| 5.0SMDJ45AS-HRA | - | 5PCKH | - | 45.0 | 50.0 | 55.3 | 1 | 72.7 | 68.8 | 2.0 | X |
| - | 5.0SMDJ45CAS-HRA | - | 5BCKH | 45.0 | 50.0 | 55.3 | 1 | 72.7 | 61.9 | 2.0 | X |
| 5.0SMDJ48AS-HRA | - | 5PCMH | - | 48.0 | 53.3 | 58.9 | 1 | 77.4 | 64.7 | 2.0 | X |
| - | 5.0SMDJ48CAS-HRA | - | 5BCMh | 48.0 | 53.3 | 58.9 | 1 | 77.4 | 58.1 | 2.0 | X |
| 5.0SMDJ51AS-HRA | - | 5PCPH | - | 51.0 | 56.7 | 62.7 | 1 | 82.4 | 60.7 | 2.0 | X |
| - | 5.0SMDJ51CAS-HRA | - | 5BCPH | 51.0 | 56.7 | 62.7 | 1 | 82.4 | 54.6 | 2.0 | X |
| 5.0SMDJ54AS-HRA | - | 5PCRH | - | 54.0 | 60.0 | 66.3 | 1 | 87.1 | 57.5 | 2.0 | X |
| - | 5.0SMDJ54CAS-HRA | - | 5BCRH | 54.0 | 60.0 | 66.3 | 1 | 87.1 | 51.7 | 2.0 | X |
| 5.0SMDJ58AS-HRA | - | 5PCTH | - | 58.0 | 64.4 | 71.2 | 1 | 93.6 | 53.5 | 2.0 | X |
| - | 5.0SMDJ58CAS-HRA | - | 5BCTH | 58.0 | 64.4 | 71.2 | 1 | 93.6 | 48.1 | 2.0 | X |
| 5.0SMDJ60AS-HRA | - | 5PCVH | - | 60.0 | 66.7 | 73.7 | 1 | 96.8 | 51.7 | 2.0 | X |

Notes:

- 5.0SMDJxxS-HRA voltage binning can be specified by customer's request via contacting Littelfuse service
- For bidirectional type having V_R of 10 volts and less, the I_R limit is double.

5.0SMDJxxS-HRA



Surface Mount – 5000W – DO-214AB

Screen Process

| | |
|--|-----------------------------------|
| 100% Vision Inspection | MIL-STD-750 method 2074 |
| 100% High Temperature Storage Life (168hrs,175°C) | MIL-STD-750 method 1031 |
| 100% X-RAY inspection | MIL-STD-750 method 2076 |
| 100% Temperature Cycle Test (-55 to150°C, 20 cycles, dwell time 15 min) | MIL-STD-750 method 1051 |
| 100% Reflow (2X) | JEDEC J-STD-020 |
| 100% Surge Test (2x) | MIL-STD-750 method 4066 |
| 100% HTRB 150°C Bias= V_R (80% breakdown voltage, 96hrs, and each direction 96hrs for Bi-directional products) | MIL-STD-750 method 1038 |
| Final Electrical Test(100% 3 sigma limit, 100% dynamic test and PAT limit) | MIL-STD-750 method 4016.4021.4011 |

Note: Up-screen program can be specified by customer's request via contacting Littelfuse service

I-V Curve Characteristics

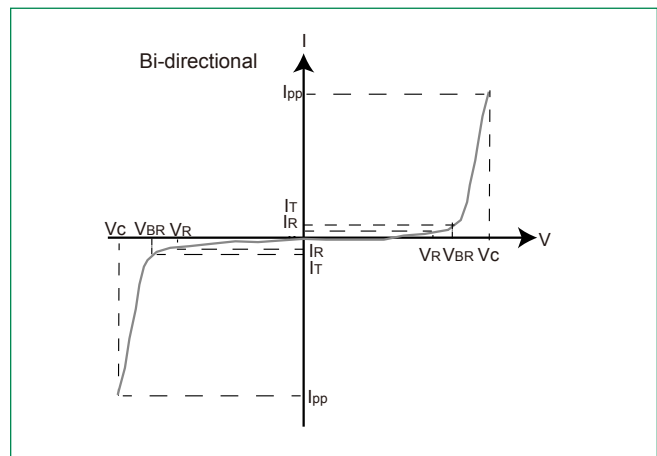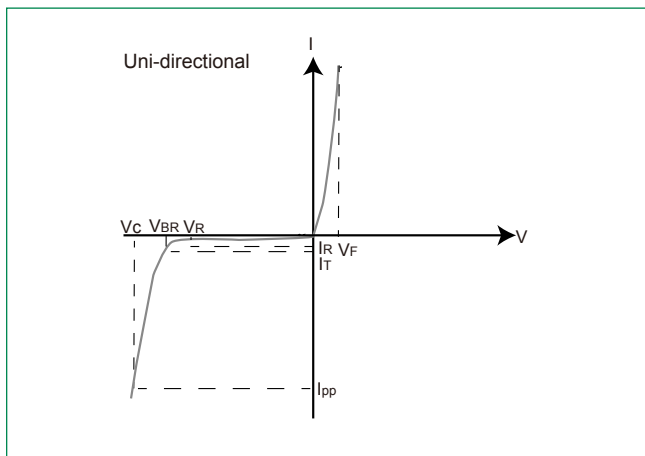

- P_{PPM} **Peak Pulse Power Dissipation** – Max power dissipation
- V_R **Stand-off Voltage** – Maximum voltage that can be applied to the TVS without operation
- V_{BR} **Breakdown Voltage** – Maximum voltage that flows though the TVS at a specified test current (I_T)
- V_C **Clamping Voltage** – Peak voltage measured across the TVS at a specified I_{ppm} (peak impulse current)
- I_R **Reverse Leakage Current** – Current measured at V_R
- V_F **Forward Voltage Drop for Uni-directional**

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1:
TVS Transients Clamping Waveform


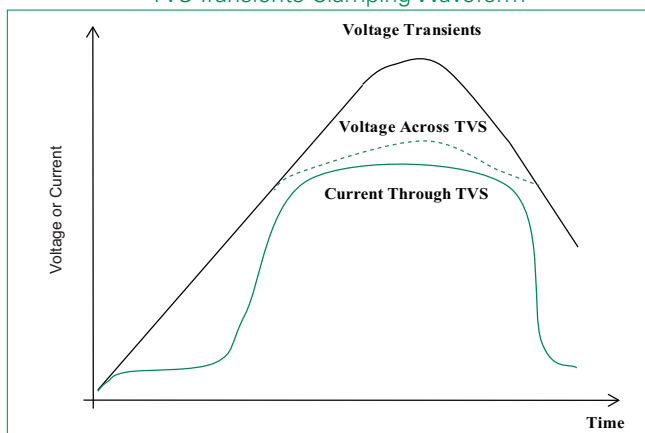


Figure 2:
Peak Pulse Power Rating

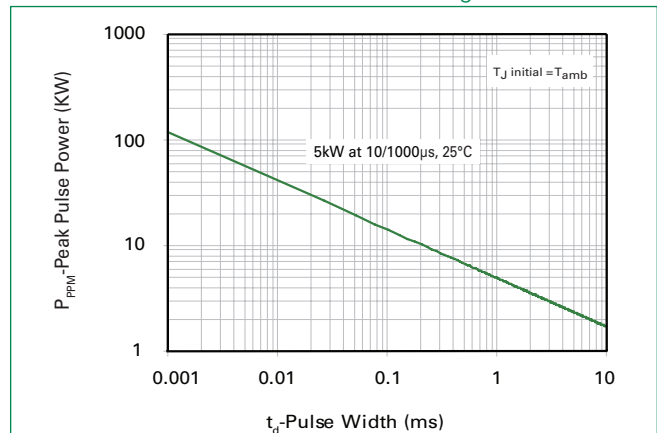

5.0SMDJxxS-HRA

Surface Mount – 5000W – DO-214AB

Figure 3:
Peak Pulse Power Derating Curve



Figure 4:
Pulse Waveform


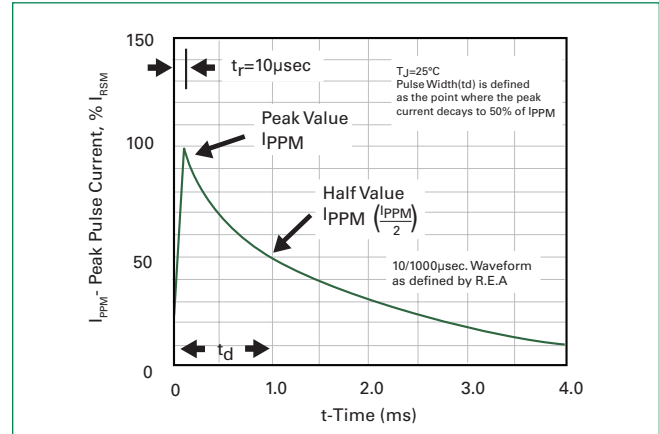


Figure 5:
Typical Junction Capacitance



Figure 6:
Typical Transient Thermal Impedance

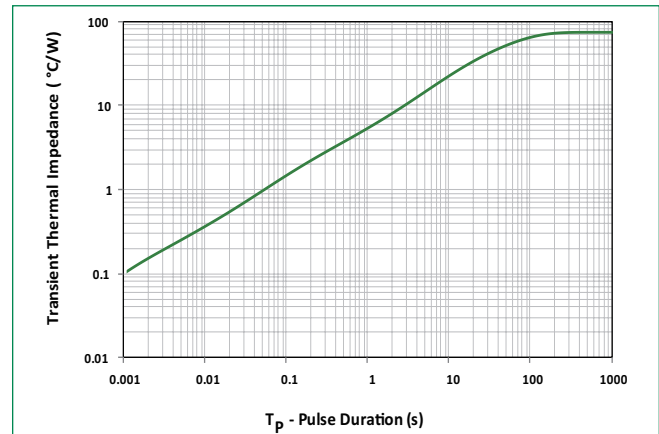


5.0SMDJxxS-HRA

Surface Mount – 5000W – DO-214AB

Soldering Parameters

| | | |
|---|------------------------------------|-------------------------|
| Reflow Condition | | Lead-free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (min to max) (t_s) | 60 – 120 secs |
| Average ramp up rate (Liquidus Temp (T_L) to peak | | 3°C/second max |
| $T_{s(max)}$ to T_A - Ramp-up Rate | | 3°C/second max |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Time (min to max) (T_s) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 30 seconds |
| Ramp-down Rate | | 6°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes Max. |
| Do not exceed | | 260°C |

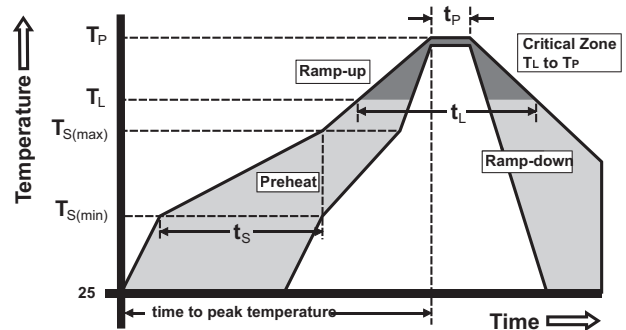

Physical Specifications

| | |
|-----------------|---|
| Weight | 0.007 ounce, 0.21 grams |
| Case | JEDEC DO214AB. Molded plastic body over glass passivated junction |
| Terminal | Matte Tin-plated leads, Solderable per JESD22-B102 |

Environmental Specifications

| | |
|----------------------------|--------------------------|
| High Temp. Storage | JESD22-A103 |
| HTRB | JESD22-A108 |
| Temperature Cycling | JESD22-A104 |
| MSL | JEDEC-J-STD-020, LEVEL 1 |
| H3TRB | JESD22-A101 |
| RSH | JESD22-A111 |

Dimensions

DO-214AB (SMC J-Bend)



| Dimensions | Inches | | Millimeters | |
|------------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.114 | 0.126 | 2.900 | 3.200 |
| B | 0.260 | 0.280 | 6.600 | 7.110 |
| C | 0.220 | 0.245 | 5.590 | 6.220 |
| D | 0.079 | 0.103 | 2.060 | 2.620 |
| E | 0.030 | 0.060 | 0.760 | 1.520 |
| F | - | 0.008 | - | 0.203 |
| G | 0.305 | 0.320 | 7.750 | 8.130 |
| H | 0.006 | 0.012 | 0.152 | 0.305 |
| I | 0.129 | - | 3.300 | - |
| J | 0.094 | - | 2.400 | - |
| K | - | 0.165 | - | 4.200 |
| L | 0.094 | - | 2.400 | - |

5.0SMDJxxS-HRA

Surface Mount – 5000W – DO-214AB

Part Numbering System




Part Marking System



Packing Options

| Part Number | Component Package | Quantity | Packaging Option | Packaging Specification |
|-----------------|-------------------|----------|----------------------------------|-------------------------|
| 5.0SMDJxxS-HRA | DO-214AB | 3000 | Tape & Reel - 16mm tape/13" reel | EIA STD RS-481 |
| 5.0SMDJxxSHRAT7 | DO-214AB | 500 | Tape & Reel - 16mm tape/7" reel | EIA STD RS-481 |

Tape and Reel Specification

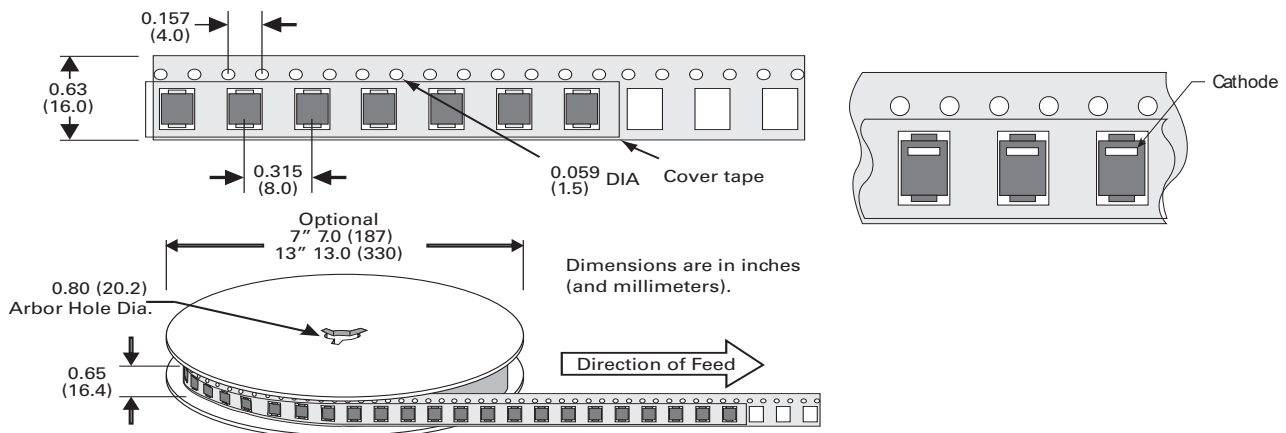

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.