


SP05 Series

30pF 30kV Unidirectional TVS Array



Additional Information

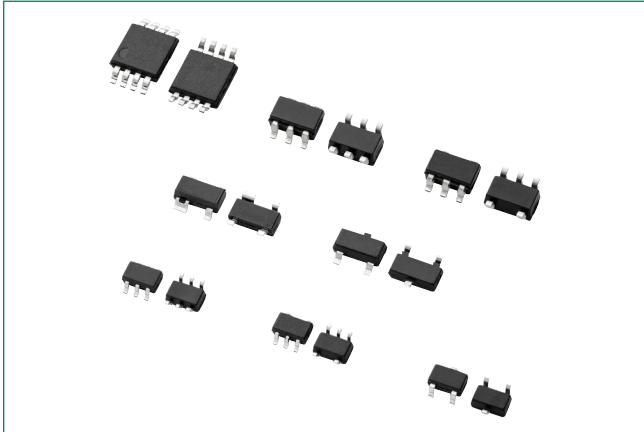

Resources




Accessories




Samples

Pinout


SP0502BAHTG
SP0502BAJTG




SP0503BAHTG




SP0504BAHTG
SP0504BAJTG



SP0505BAHTG
SP0505BAJTG



SP0506BAATG



Description

This surface mount family of arrays suppress ESD and other transient overvoltage events. Used to meet the International Electrotechnical Compatibility (IEC transient immunity standards IEC 61000-4-2 for Electrostatic Discharge Requirements), these components can help protect sensitive digital or analog input circuits on data, signal, or control lines with voltage levels up to 5VDC.

The monolithic silicon arrays are comprised of specially designed structures for transient voltage suppression (TVS). The size and shape of these structures have been tailored for transient protection. Compared to MOVs, this diode array provides a lower clamping voltage and lower off-state capacitance.

Features & Benefits

- An Array of 2, 3, 4, 5 or 6 TVS Avalanche Diodes in a ultra small SC70, SOT-23, SOT-143 or MSOP packages
- ESD Capability Standards
 - - IEC 61000-4-2, Direct Discharge 30kV (Level 4)
 - - IEC 61000-4-2, Air Discharge 30kV (Level 4)
 - - MIL STD 883 3015.7 30kV
- Input Protection for Applications Up to 5VDC
- Fast Response Time <1ns
- Low Input Capacitance 30pF Typical
- Operating Temperature Range -40°C to 125°C
- Moisture Sensitivity Level (MSL-1)

Applications

- Mobile phone handsets
- Personal Digital Assistants (PDA)
- Portable handheld equipment (Laptop, Palmtop computers)
- Computer port, keyboard (USB1.1)
- Digital still cameras
- Digital video cameras
- MP3 players

Life Support Note:

Not Intended for Use in Life Support or Life Saving Applications

The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

SP05 Series

30pF 30kV Unidirectional TVS Array

Absolute Maximum Ratings

| Symbol | Parameter | Rating | Units |
|------------|--|------------|-------|
| P_{PK} | Peak Pulse Power ($t_p=8/20\mu s$) | 25 | W |
| I_{PP} | Peak Pulse Current ($t_p=8/20\mu s$) | 3 | A |
| T_{OP} | Operating Temperature | -40 to 125 | °C |
| T_{STOR} | Storage Temperature | -55 to 150 | °C |

Caution: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.


Electrical Characteristics ($T_A = +25^\circ C$, Unless Otherwise Specified)

| Parameter | Test Conditions | Min | Typ | Max | Units |
|------------------------------------|-------------------|------|------|------|----------|
| Reverse Standoff Voltage | $I_R \leq 1\mu A$ | - | - | 5.5 | V |
| Reverse Standoff Leakage Current | $V = 5.0V$ | - | 1 | 100 | nA |
| Signal Clamp Voltage | | | | | |
| Positive | $I = 1mA$ | 6.0 | - | 8.5 | V |
| Negative | $I = 10mA$ | -1.2 | -0.8 | -0.4 | V |
| Clamp Voltage during ESD | | | | | |
| MIL-STD-883 Method 3015 (HBM) test | - | - | - | - | - |
| + 8kV | - | - | 12 | - | V |
| - 8kV | - | - | -8 | - | V |
| ESD Test Level (1) | | | | | - |
| IEC-61000-4-2, Contact discharge | - | 30 | - | - | kV |
| MIL-STD-883 Method 3015 (HBM) | - | 30 | - | - | kV |
| Capacitance | $2.5V @ 1MHz$ | - | 30 | - | pF |
| Turn on/off Time | - | - | <1 | - | ns |
| Diode Dynamic Resistance | | | | | - |
| Forward Conduction | - | - | 1.0 | - | Ω |
| Reverse Conduction | - | - | 1.4 | - | Ω |

Note:

1. ESD voltage applied between channel pins and ground, one pin at a time; all other channel pins are open; all ground pins are grounded.

Typical Diode Capacitance vs. Reverse Voltage


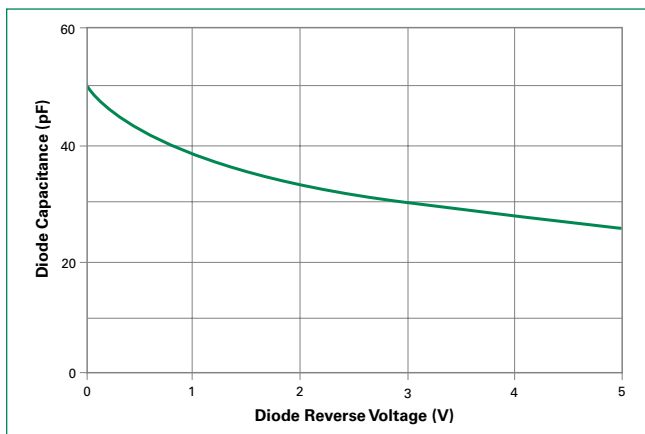


SP05 Series


30pF 30kV Unidirectional TVS Array

Soldering Parameters

| | | |
|--|------------------------------------|------------------|
| Reflow Condition | Pb – Free assembly | |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (min to max) (t_s) | 60 – 120 secs |
| Average ramp up rate (Liquidus) Temp (T_L) to peak | 5°C/second max | |
| $T_{s(max)}$ to T_L - Ramp-up Rate | 5°C/second max | |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Temperature (t_L) | 60 – 150 seconds |
| Peak Temperature (T_p) | 260 ^{+0/-5} °C | |
| Time within 5°C of actual peak Temperature (t_p) | 30 seconds | |
| Ramp-down Rate | 5°C/second max | |
| Time 25°C to peak Temperature (T_p) | 8 minutes Max. | |
| Do not exceed | 260°C | |

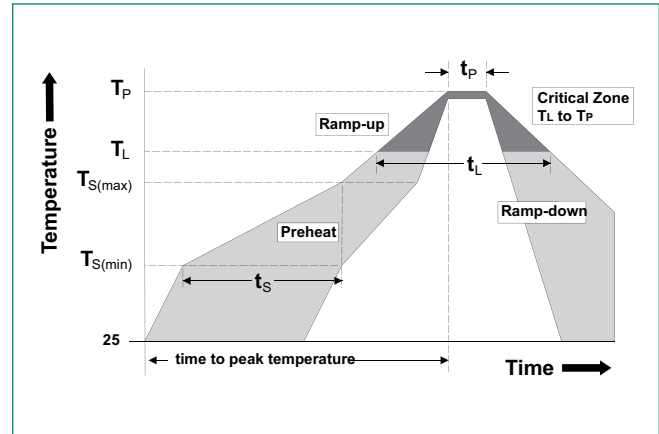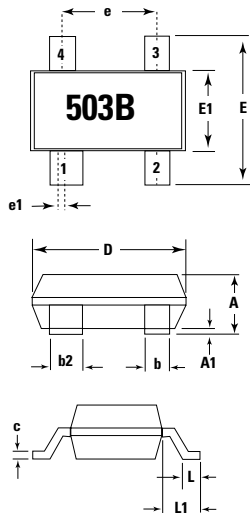**Package Dimensions – SOT143****SP0503BAHTG - SOT143-4**








Recommended Pad Layout

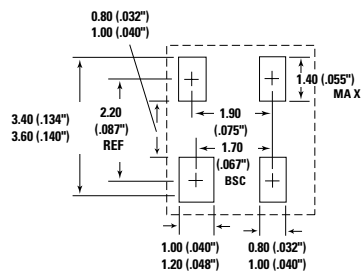




| Package | SOT143-4 | | | |
|---------|-------------|------|-----------|-------|
| Pins | 4 | | | |
| JEDEC | TO-253 | | | |
| Symbol | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| A | 0.8 | 1.22 | 0.03 | 0.048 |
| A1 | 0.05 | 0.15 | 0.002 | 0.006 |
| b | 0.30 | 0.50 | 0.012 | 0.020 |
| b2 | 0.76 | 0.89 | 0.030 | 0.035 |
| c | 0.08 | 0.20 | 0.003 | 0.008 |
| D | 2.80 | 3.04 | 0.110 | 0.120 |
| E | 2.10 | 2.64 | 0.082 | 0.104 |
| E1 | 1.20 | 1.40 | 0.047 | 0.055 |
| e | 1.92 BSC | | 0.076 BSC | |
| e1 | 0.20 BSC | | 0.008 BSC | |
| L | 0.4 | 0.6 | 0.016 | 0.024 |
| L1 | 0.550 REF | | 0.022 REF | |

SP05 Series

30pF 30kV Unidirectional TVS Array

Package Dimensions — SC70**SP0502BAJTG - SC70-3****SP0504BAJTG - SC70-5****SP0505BAJTG - SC70-6**

Recommended Pad Layout

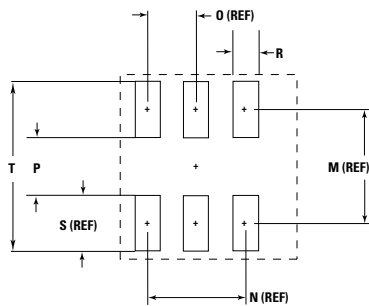


| Package | SC70-3 | | | |
|---------|-------------|------|-----------|-------|
| Pins | 3 | | | |
| JEDEC | MO-203 | | | |
| Symbol | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| A | 0.80 | 1.10 | 0.031 | 0.043 |
| A1 | 0.00 | 0.10 | 0.00 | 0.004 |
| A2 | 0.70 | 1.00 | 0.028 | 0.039 |
| B | 0.15 | 0.30 | 0.006 | 0.012 |
| c | 0.08 | 0.25 | 0.003 | 0.010 |
| D | 1.85 | 2.25 | 0.073 | 0.089 |
| E | 1.15 | 1.35 | 0.045 | 0.053 |
| e | 0.66 BSC | | 0.026 BSC | |
| HE | 2.00 | 2.40 | 0.079 | 0.094 |
| L | 0.26 | 0.46 | 0.010 | 0.018 |

| Package | SC70-5 | | | |
|---------|-------------|------|-----------|-------|
| Pins | 5 | | | |
| JEDEC | MO-203 | | | |
| Symbol | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| A | 0.80 | 1.10 | 0.031 | 0.043 |
| A1 | 0.00 | 0.10 | 0.00 | 0.004 |
| A2 | 0.70 | 1.00 | 0.028 | 0.039 |
| B | 0.15 | 0.30 | 0.006 | 0.012 |
| c | 0.08 | 0.25 | 0.003 | 0.010 |
| D | 1.85 | 2.25 | 0.073 | 0.089 |
| E | 1.15 | 1.35 | 0.045 | 0.053 |
| e | 0.65 BSC | | 0.026 BSC | |
| HE | 2.00 | 2.40 | 0.079 | 0.094 |
| L | 0.26 | 0.46 | 0.010 | 0.018 |


| Package | SC70-6 | | | |
|---------|-------------|------|-----------|-------|
| Pins | 6 | | | |
| JEDEC | MO-203 | | | |
| Symbol | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| A | 0.80 | 1.10 | 0.031 | 0.043 |
| A1 | 0.00 | 0.10 | 0.00 | 0.004 |
| A2 | 0.70 | 1.00 | 0.028 | 0.039 |
| B | 0.15 | 0.30 | 0.006 | 0.012 |
| c | 0.08 | 0.25 | 0.003 | 0.010 |
| D | 1.85 | 2.25 | 0.073 | 0.089 |
| E | 1.15 | 1.35 | 0.045 | 0.053 |
| e | 0.65 BSC | | 0.026 BSC | |
| HE | 2.00 | 2.40 | 0.079 | 0.094 |
| L | 0.26 | 0.46 | 0.010 | 0.018 |
| M | - | 1.60 | - | 0.063 |
| N | - | 1.30 | - | 0.051 |
| O | - | 0.65 | - | 0.026 |
| P | - | 0.70 | - | 0.028 |
| R | - | 0.35 | - | 0.014 |
| S | - | 0.90 | - | 0.035 |
| T | - | 2.50 | - | 0.098 |

SP05 Series


30pF 30kV Unidirectional TVS Array

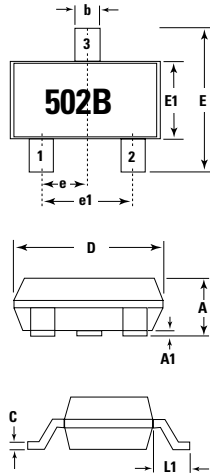Package Dimensions – SOT23**SP0502BAHTG - SOT23-3**


Recommended Pad Layout




| Package | SOT23-3 | | | |
|---------|-------------|------|-----------|----------|
| Pins | 3 | | | |
| JEDEC | TO-236 | | | |
| Symbol | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| A | 0.89 | 1.12 | 0.035 | 0.044 |
| A1 | 0.01 | 0.1 | 0.0004 | 0.004 |
| b | 0.3 | 0.5 | 0.012 | 0.020 |
| c | 0.08 | 0.2 | 0.003 | 0.008 |
| D | 2.8 | 3.04 | 0.110 | 0.120 |
| E | 2.1 | 2.64 | 0.083 | 0.104 |
| E1 | 1.2 | 1.4 | 0.047 | 0.055 |
| e | 0.95 BSC | | 0.038 BSC | |
| e1 | 1.90 BSC | | 0.075 BSC | |
| L1 | 0.54 REF | | 0.021 REF | |
| M | | 2.29 | | 0.090 |
| N | | 0.95 | | 0.038 |
| O | | 0.78 | | 0.030TYP |
| P | | 0.78 | | 0.030TYP |

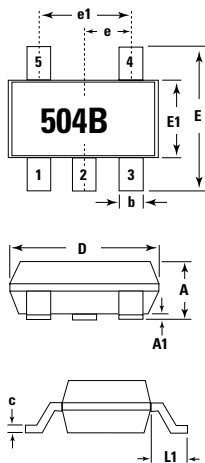**SP0504BAHTG - SOT23-5**


Recommended Pad Layout



| Package | SOT23-5 | | | |
|---------|-------------|------|-----------|---------|
| Pins | 5 | | | |
| JEDEC | MO-178 | | | |
| Symbol | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| A | - | 1.45 | - | 0.057 |
| A1 | 0 | 0.15 | 0 | 0.006 |
| b | 0.25 | 0.5 | 0.0098 | 0.020 |
| c | 0.08 | 0.22 | 0.003 | 0.009 |
| D | 2.75 | 3.05 | 0.108 | 0.120 |
| E | 2.6 | 3.0 | 0.102 | 0.118 |
| E1 | 1.45 | 1.75 | 0.057 | 0.069 |
| e | 0.95 BSC | | 0.038 BSC | |
| e1 | 1.90 BSC | | 0.075 BSC | |
| L1 | 0.60 REF | | 0.024 REF | |
| M | | 2.59 | | .102 |
| N | | 0.95 | | .038 |
| O | | 0.69 | | .027TYP |
| P | | 0.99 | | .039TYP |

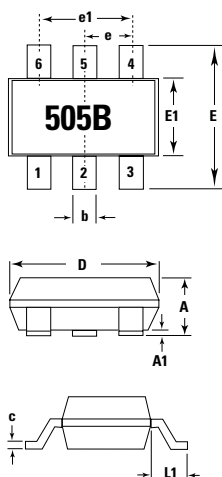**SP0505BAHTG - SOT23-6**


Recommended Pad Layout




| Package | SOT23-6 | | | |
|---------|-------------|------|-----------|---------|
| Pins | 6 | | | |
| JEDEC | MO-178 | | | |
| Symbol | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| A | - | 1.45 | - | 0.057 |
| A1 | 0 | 0.15 | 0 | 0.006 |
| b | 0.25 | 0.5 | 0.0098 | 0.020 |
| c | 0.08 | 0.22 | 0.003 | 0.009 |
| D | 2.75 | 3.05 | 0.108 | 0.120 |
| E | 2.6 | 3.0 | 0.102 | 0.118 |
| E1 | 1.45 | 1.75 | 0.057 | 0.069 |
| e | 0.95 BSC | | 0.038 BSC | |
| e1 | 1.90 BSC | | 0.075 BSC | |
| L1 | 0.60 REF | | 0.024 REF | |
| M | | 2.59 | | .102 |
| N | | 0.95 | | 0.038 |
| O | | 0.69 | | .027TYP |
| P | | 0.99 | | .039TYP |

SP05 Series

30pF 30kV Unidirectional TVS Array

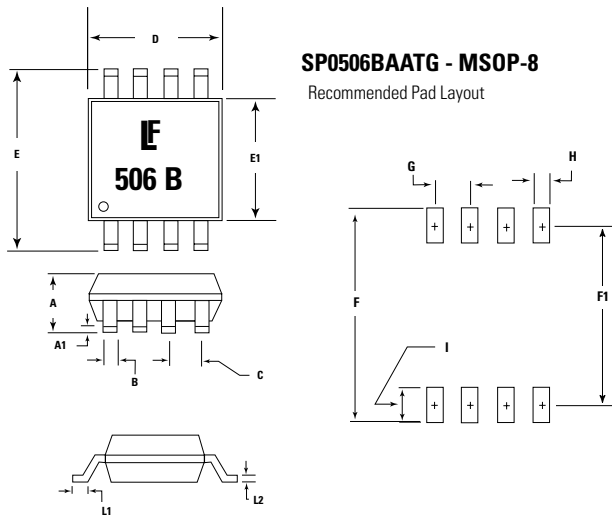Package Dimensions – MSOP

| Package Pins | MSOP | | | |
|--------------|--------------|---------|--------|----------|
| | 8 | | | |
| | JEDEC MO-187 | | | |
| Symbol | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| D | 2.90 | 3.10 | 0.114 | .122 |
| E | 4.78 | 4.98 | .188 | .196 |
| E1 | 2.90 | 3.10 | .114 | .122 |
| A | 0.87 | 1.17 | .034 | .046 |
| A1 | 0.05 | 0.25 | .002 | 0.010 |
| B | - | 0.30TYP | - | 0.012TYP |
| C | - | 0.65TYP | - | 0.026TYP |
| L1 | 0.52 | 0.54 | 0.020 | 0.021 |
| L2 | - | 0.18TYP | - | .007TYP |
| F | - | 5.28 | - | .208 |
| F1 | - | 4.24 | - | .167 |
| G | - | 0.65 | - | 0.026 |
| H | - | 0.38 | - | .015 |
| I | - | 1.04 | - | .041 |

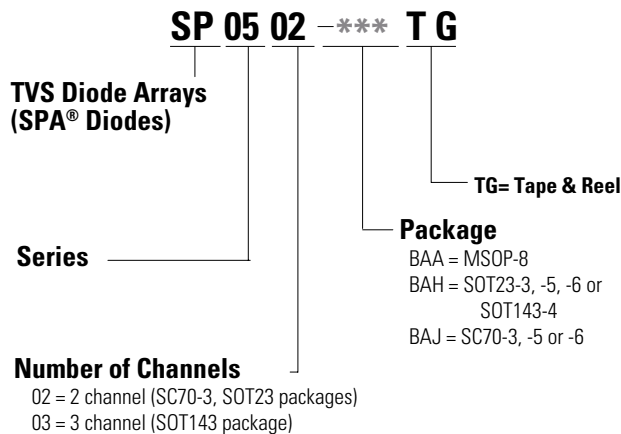Part Numbering System**Product Characteristics**

| | |
|---------------------------|--|
| Lead Plating | "G" Green version - Matte Tin (Sn) |
| Lead Material | Copper / Iron Alloy |
| Lead Coplanarity | 0.004 inches (0.102mm) |
| Substrate Material | Silicon |
| Body Material | Molded Compound |
| Flammability | UL Recognized compound meeting flammability rating V-0 |

Notes:

- All dimensions are in millimeters.
- Dimensions include solder plating.
- Dimensions are exclusive of mold flash & metal burr.
- Blo is facing up for mold and facing down for trim/form, i.e. reverse trim/form.
- Package surface matte finish VDI 11-13.

Ordering Information


| Part Number | CH | Package Type | Quantity Per Reel |
|-------------|----|--------------|-------------------|
| SP0502BAHTG | 2 | SOT23-3 | 3000 |
| SP0503BAHTG | 3 | SOT143-4 | 3000 |
| SP0504BAHTG | 4 | SOT23-5 | 3000 |
| SP0505BAHTG | 5 | SOT23-6 | 3000 |
| SP0506BAATG | 6 | MSOP-8 | 4000 |
| SP0502BAJTG | 2 | SC70-3 | 3000 |
| SP0504BAJTG | 4 | SC70-5 | 3000 |
| SP0505BAJTG | 5 | SC70-6 | 3000 |

*Note: To order NON-Green/RoHS/Lead Free version of product, remove "G" at the end of part number.

SP05 Series


30pF 30kV Unidirectional TVS Array

Embossed Carrier Tape & Reel Specification – SOT23-3

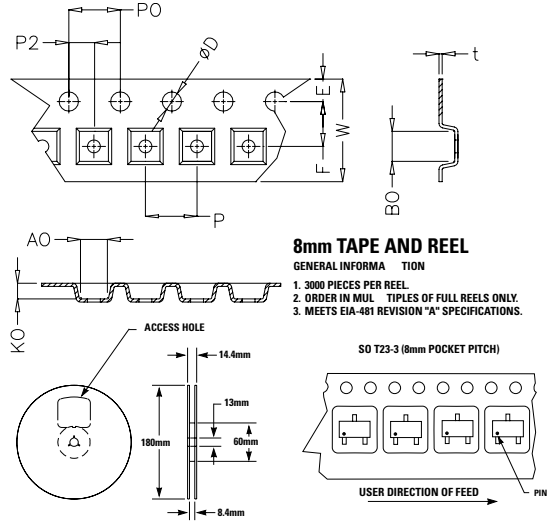


| Symbol | Millimetres | | Inches | |
|--------|-------------|------|--------|-------|
| | Min | Max | Min | Max |
| E | 1.65 | 1.85 | 0.065 | 0.073 |
| F | 3.40 | 3.60 | 0.134 | 0.142 |
| P2 | 1.90 | 2.10 | 0.075 | 0.083 |
| D | 1.40 | 1.60 | 0.055 | 0.063 |
| P0 | 3.90 | 4.10 | 0.154 | 0.161 |
| W | 7.70 | 8.30 | 0.303 | 0.327 |
| P | 3.90 | 4.10 | 0.154 | 0.161 |
| A0 | 3.05 | 3.25 | 0.120 | 0.128 |
| B0 | 2.67 | 2.87 | 0.105 | 0.113 |
| K0 | 1.12 | 1.32 | 0.044 | 0.052 |
| t | 0.22 | 0.24 | 0.009 | 0.009 |

Embossed Carrier Tape & Reel Specification – SOT23-5

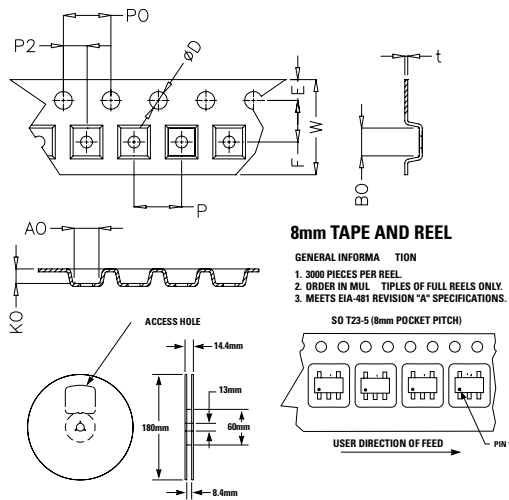

| Symbol | Millimetres | | Inches | |
|--------|-------------|------|--------|-------|
| | Min | Max | Min | Max |
| E | 1.65 | 1.85 | 0.065 | 0.073 |
| F | 3.40 | 3.60 | 0.134 | 0.142 |
| P2 | 1.90 | 2.10 | 0.075 | 0.083 |
| D | 1.40 | 1.60 | 0.055 | 0.063 |
| P0 | 3.90 | 4.10 | 0.154 | 0.161 |
| W | 7.70 | 8.30 | 0.303 | 0.327 |
| P | 3.90 | 4.10 | 0.154 | 0.161 |
| A0 | 3.05 | 3.25 | 0.120 | 0.128 |
| B0 | 2.67 | 2.87 | 0.105 | 0.113 |
| K0 | 1.12 | 1.32 | 0.044 | 0.052 |
| t | 0.22 | 0.24 | 0.009 | 0.009 |

Embossed Carrier Tape & Reel Specification – SOT23-6

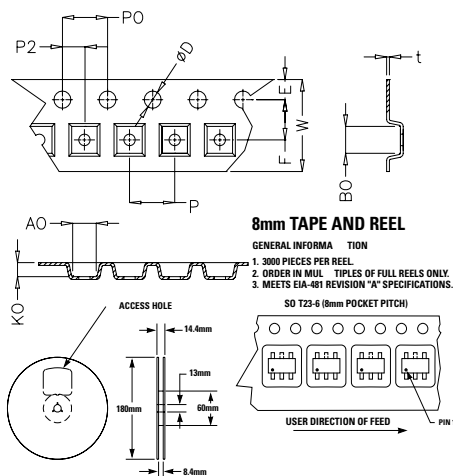


| Symbol | Millimetres | | Inches | |
|--------|-------------|------|--------|-------|
| | Min | Max | Min | Max |
| E | 1.65 | 1.85 | 0.065 | 0.073 |
| F | 3.40 | 3.60 | 0.134 | 0.142 |
| P2 | 1.90 | 2.10 | 0.075 | 0.083 |
| D | 1.40 | 1.60 | 0.055 | 0.063 |
| P0 | 3.90 | 4.10 | 0.154 | 0.161 |
| W | 7.70 | 8.30 | 0.303 | 0.327 |
| P | 3.90 | 4.10 | 0.154 | 0.161 |
| A0 | 3.05 | 3.25 | 0.120 | 0.128 |
| B0 | 2.67 | 2.87 | 0.105 | 0.113 |
| K0 | 1.12 | 1.32 | 0.044 | 0.052 |
| t | 0.22 | 0.24 | 0.009 | 0.009 |

SP05 Series


30pF 30kV Unidirectional TVS Array

Embossed Carrier Tape & Reel Specification – SOT143-4

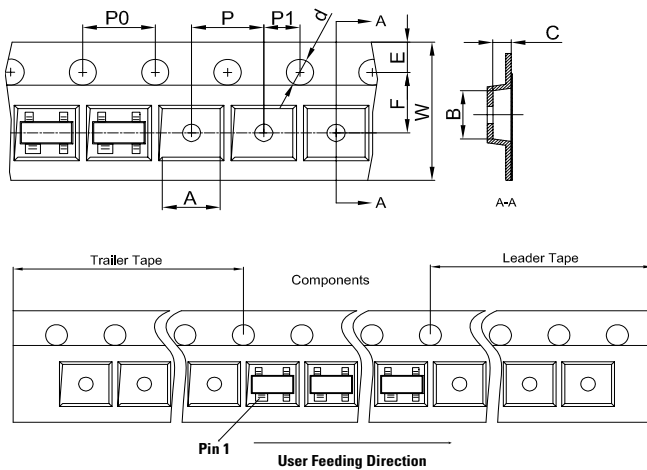


| Symbol | Millimetres | | Inches | |
|--------|-------------|------|--------|-------|
| | Min | Max | Min | Max |
| A | 3.09 | 3.09 | 0.122 | 0.130 |
| B | 2.70 | 2.90 | 1.106 | 0.114 |
| C | 1.21 | 1.41 | 0.048 | 0.056 |
| d | 1.40 | 1.60 | 0.055 | 0.102 |
| E | 1.65 | 0.85 | 0.065 | 0.073 |
| F | 3.45 | 3.65 | 0.133 | 0.142 |
| P0 | 4.10 | 3.90 | 0.154 | 0.161 |
| P | 4.10 | 3.90 | 0.154 | 0.161 |
| P1 | 1.90 | 2.10 | 0.075 | 0.083 |
| W | 7.90 | 8.10 | 0.311 | 0.319 |

Embossed Carrier Tape & Reel Specification – MSOP-8

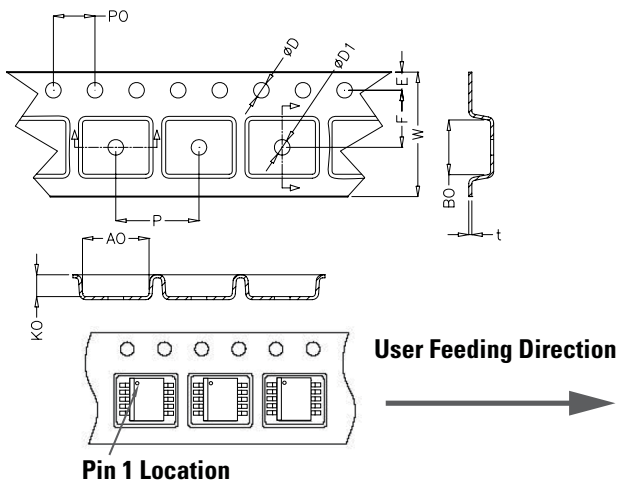

| Symbol | Millimetres | | Inches | |
|--------|-------------|-------|---------------|-------|
| | Min | Max | Min | Max |
| E | 1.65 | 1.85 | 0.065 | 0.073 |
| F | 5.40 | 5.60 | 0.213 | 0.220 |
| D | 1.50 | 1.60 | 0.059 | 0.063 |
| D1 | 1.50 Min | | 0.059 Min | |
| P0 | 3.90 | 4.10 | 0.154 | 0.161 |
| W | 11.70 | 12.30 | 0.461 | 0.484 |
| P | 7.90 | 8.10 | 0.311 | 0.319 |
| AO | 5.20 | 5.40 | 0.205 | 0.213 |
| BO | 3.30 | 3.40 | 0.126 | 0.134 |
| K0 | 1.20 | 1.40 | 0.047 | 0.055 |
| t | 0.30 ± 0.05 | | 0.012 ± 0.002 | |

Embossed Carrier Tape & Reel Specification – SC70-3

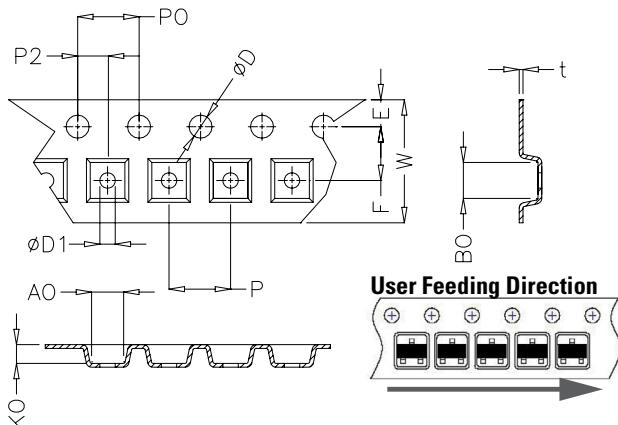


| Symbol | Millimetres | | Inches | |
|--------|-------------|------|-----------|-------|
| | Min | Max | Min | Max |
| E | 1.65 | 1.85 | 0.064 | 0.073 |
| F | 3.45 | 3.55 | 0.135 | 0.139 |
| P2 | 1.95 | 2.05 | 0.077 | 0.081 |
| D | 1.40 | 1.60 | 0.055 | 0.063 |
| D1 | 1.00 | 1.25 | 0.039 | 0.049 |
| P0 | 3.90 | 4.10 | 0.154 | 0.161 |
| W | 7.70 | 8.10 | 0.303 | 0.318 |
| P | 3.90 | 4.10 | 0.153 | 0.161 |
| AO | 2.14 | 2.34 | 0.084 | 0.092 |
| BO | 2.24 | 2.44 | 0.088 | 0.096 |
| K0 | 1.12 | 1.32 | 0.044 | 0.052 |
| t | 0.27 Max | | 0.010 Max | |

SP05 Series


30pF 30kV Unidirectional TVS Array

Embossed Carrier Tape & Reel Specification — SC70-5

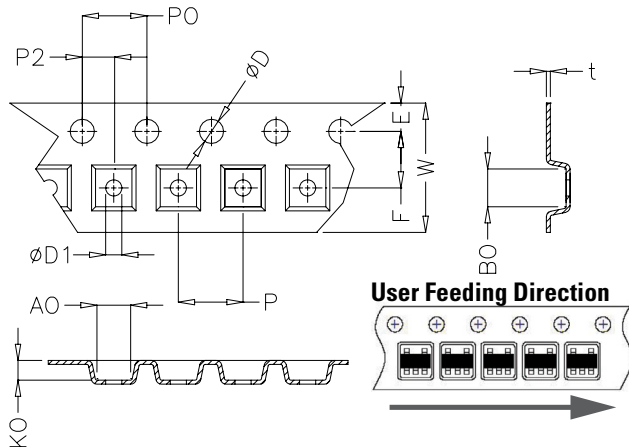

| Symbol | Millimetres | | Inches | |
|-----------|-------------|------|-----------|-------|
| | Min | Max | Min | Max |
| E | 1.65 | 1.85 | 0.064 | 0.073 |
| F | 3.45 | 3.55 | 0.135 | 0.139 |
| P2 | 1.95 | 2.05 | 0.077 | 0.081 |
| D | 1.40 | 1.60 | 0.055 | 0.063 |
| D1 | 1.00 | 1.25 | 0.039 | 0.049 |
| P0 | 3.90 | 4.10 | 0.154 | 0.161 |
| W | 7.70 | 8.10 | 0.303 | 0.318 |
| P | 3.90 | 4.10 | 0.153 | 0.161 |
| A0 | 2.14 | 2.34 | 0.084 | 0.092 |
| B0 | 2.24 | 2.44 | 0.088 | 0.096 |
| K0 | 1.12 | 1.32 | 0.044 | 0.052 |
| t | 0.27 Max | | 0.010 Max | |

Embossed Carrier Tape & Reel Specification — SC70--6

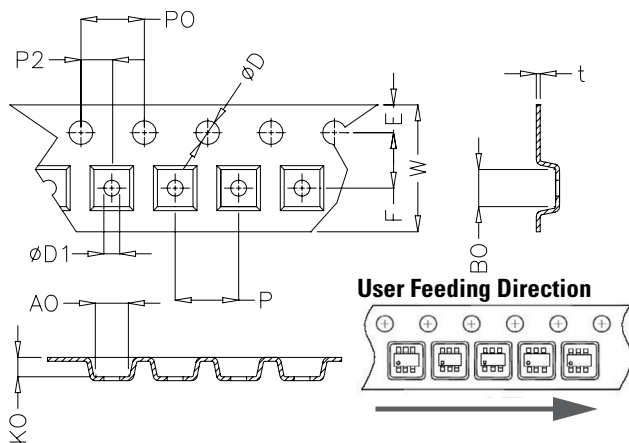

| Symbol | Millimetres | | Inches | |
|-----------|-------------|------|-----------|-------|
| | Min | Max | Min | Max |
| E | 1.65 | 1.85 | 0.064 | 0.073 |
| F | 3.45 | 3.55 | 0.135 | 0.139 |
| P2 | 1.95 | 2.05 | 0.077 | 0.081 |
| D | 1.40 | 1.60 | 0.055 | 0.063 |
| D1 | 1.00 | 1.25 | 0.039 | 0.049 |
| P0 | 3.90 | 4.10 | 0.154 | 0.161 |
| W | 7.70 | 8.10 | 0.303 | 0.318 |
| P | 3.90 | 4.10 | 0.153 | 0.161 |
| A0 | 2.14 | 2.34 | 0.084 | 0.092 |
| B0 | 2.24 | 2.44 | 0.088 | 0.096 |
| K0 | 1.12 | 1.32 | 0.044 | 0.052 |
| t | 0.27 Max | | 0.010 Max | |

Disclaimer Notice - Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse. "Littelfuse" includes Littelfuse, Inc., and all of its affiliate entities. <http://www.littelfuse.com/disclaimer-electronics>