CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

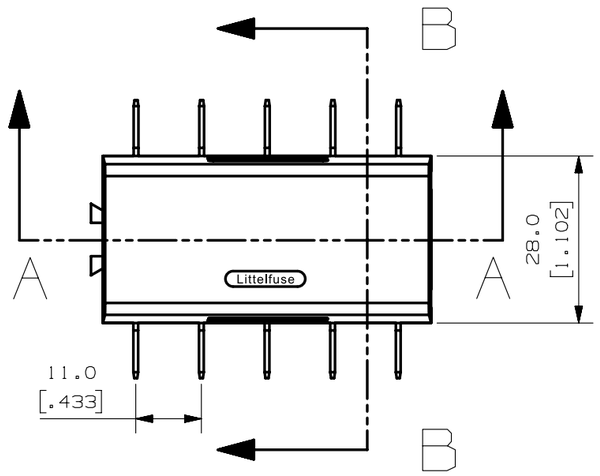

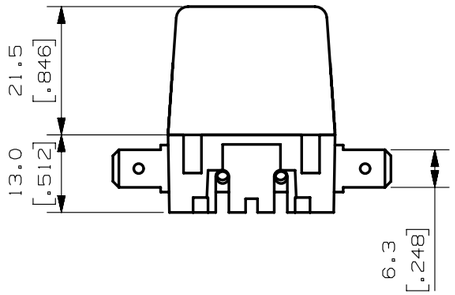

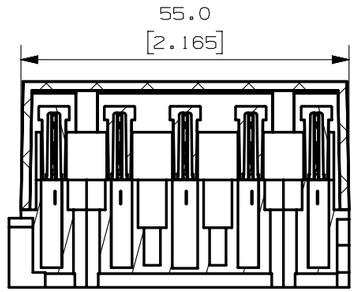

SECTION A-A

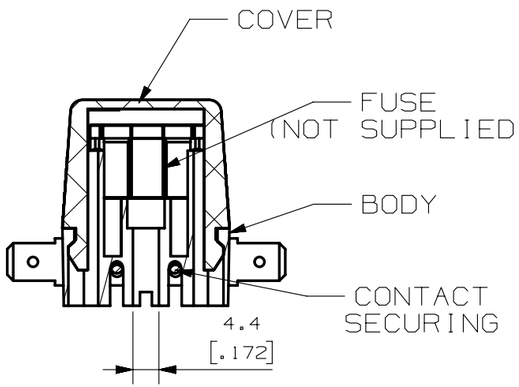

SECTION B-B

NOTES:
1. MATERIALS:
   COVER: CRYSTAL-CLAER POLYCARBONATE
   BODY: BLACK POLYAMIDE, GLASS FIBER REINFORCED
   CONTACT SECURING: WHITE POLYAMIDE, GLASS FIBER REINFORCED
   CONTACTS: TIN PLATED BRASS, PLATING THICKNESS 8-10u

METRIC
ASSEMBLY

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
		BILL OF MATERIAL		

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎ CPK — DENOTES CRITICAL CHARACTERISTICS.

CPK — DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

ST — DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP — DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

LTR	DATE	REVISION	CHK	APD
A	5/Jan/16	515377GCA-RELEASE FYUE		

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

MATL SPEC: REFER TO NOTES

FINISH: REFER TO NOTES

DRW	FYUE	DATE 8/16/13	SCALE 1:1	
CHK		DATE	SUPER DR	
APPD		DATE	FINISH GOOD WT	GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)

	UP TO 3	OVER 3 - UP TO 6	OVER 6 - UP TO 30	OVER 30 - UP TO 120	OVER 120 - UP TO 400
DIMENSION	±0.1	±0.1	±0.2	±0.3	±0.5
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5

TITLE: ATO BLOCK 5 POSITIONS, HORIZONTAL CONTACTS

3RD ANGLE PROJECTION

Littelfuse — LIPA CITY, BATANGAS, PHILIPPINES

REVISION: A

DRWG. NO.: 03500417Z

OUTLINE