CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED (rev C)

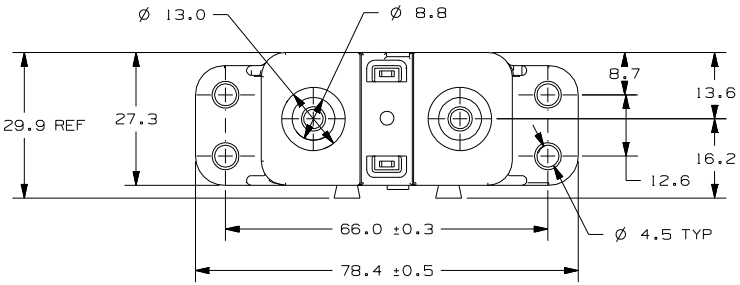




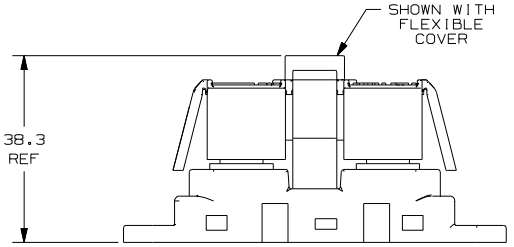





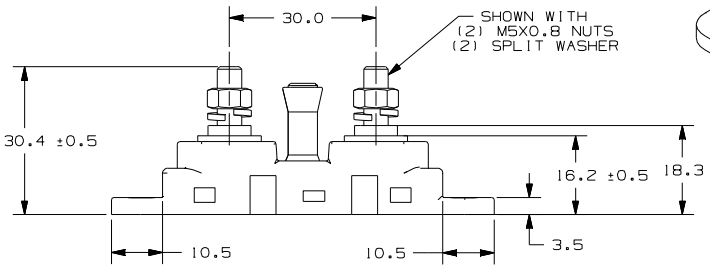


NOTES:
1) BASE: UL94V0, GLASS FILLED PA66, BLACK
M5 STUDS: ZINC-PLATED STEEL
COVER: THERMOPLASTIC ELASTOMER, BLACK
HEX NUTS: STEEL
LOCK WASHERS: STEEL
2) MAX FUSE RATING: 200A
3) M5 STUD TORQUE: 3-5.0 Nm MAX
MOUNTING TORQUE: WITH M4 BOLTS AND WASHERS: 5Nm MAX
4) TEMPERATURE RATING: -40°C TO 125°C

METRIC
ASSEMBLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

| | |
|---|---|
| ◎ | DENOTES CRITICAL CHARACTERISTICS. |
| CPK | DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS |
| CP | DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE |

BILL OF MATERIAL

| NO | COMPONENT NO | DESCRIPTION | QTY/M | U/M |
|---|---|---|---|---|
| 4 | | SPLIT LOCK WASHER, M5 | EA | 2 |
| 3 | | HEX NUT, M5X.8 | EA | 2 |
| 2 | | COVER | EA | 1 |
| 1 | | BASE | EA | 1 |

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

MATL SPEC SEE NOTES
FINISH SEE NOTES
DRW PVN DATE 10/18/12
CHK DATE
APPD DATE
SCALE 1:1
SUPER DR
FINSH GOOD WT GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-mK)

| | OVER 0.5 UP TO 3 | OVER 3 UP TO 6 | OVER 6 UP TO 30 | OVER 30 UP TO 120 | OVER 120 UP TO 400 |
|---|---|---|---|---|---|
| DIMENSION | ±0.1 | ±0.1 | ±0.2 | ±0.3 | ±0.5 |
| TOLERANCE | | | | | |

3RD ANGLE PROJECTION

TITLE: FLEX-MIDI FUSE HOLDER

Littelfuse CHICAGO, USA 773-628-1000

REVISION B DRWG. NO. OL-04981038HXFC

| LTR | DATE | REVISION | CHK | APD |
|---|---|---|---|---|
| B | 10/18/12 | RELEASE FOR PRODUCTION. ECA 500000006363, 10/18/12 | PN | |