CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED












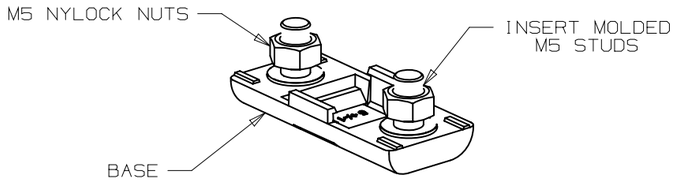


NOTES:
1. MATERIAL:
   BASE: UL94V-0 GLASS FILLED NYLON
   STUDS: M5
   NUTS: ZINC-PLATED NYLOCK NUT
2. TORQUE RATING: 5±1 Nm
3. FUSE RATING: 30-200A
4. WIRE SIZE: 14-4 AWG (2.5mm²-20mm²)
5. TEMPERATURE RATING: -40°C TO 125°C

PACKAGING NOTES:
1. PARTS ARE PACKED 50 PC PER BAG, 10 BAGS PER BOX.

METRIC
ASSEMBLY

| NO | COMPONENT NO | DESCRIPTION | QTY/M | U/M |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

BILL OF MATERIAL

MATL SPEC

FINISH

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

| | DATE | SCALE |
|---|---|---|
| DRW OPL | 05/16/11 | 1:1 |
| CHK | DATE | SUPER DR |
| APPD | DATE | FINISH GOOD WT GRAMS/PIECE |

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-mK)

| | UP TO 3 | OVER 3 - UP TO 6 | OVER 6 - UP TO 30 | OVER 30 - UP TO 120 | OVER 120 - UP TO 400 |
|---|---|---|---|---|---|
| DIMENSION | 0.5 | ±0.1 | ±0.2 | ±0.3 | ±0.5 |
| TOLERANCE | ±0.1 | ±0.1 | ±0.2 | ±0.3 | ±0.5 |

TITLE
BASE FOR MIDI INLINE HOLDER, W/M5 BOLTS

3RD ANGLE PROJECTION

Littelfuse
DES PLAINES, ILLINOIS 60016

REVISION A | DRWG. NO. OL-498921-2 | OUTLINE

| LTR | DATE | REVISION | CHK | APD |
|---|---|---|---|---|
| A | 05/16/11 | 502090ERA-RELEASE OPL | | |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎ DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE