CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

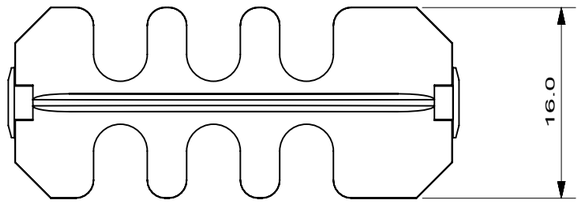


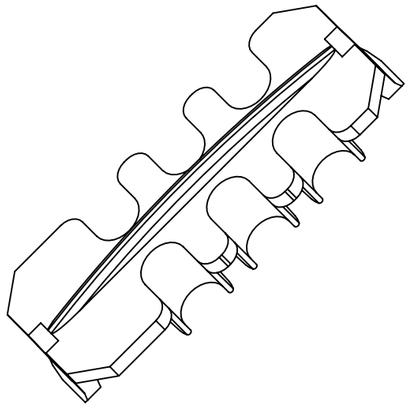

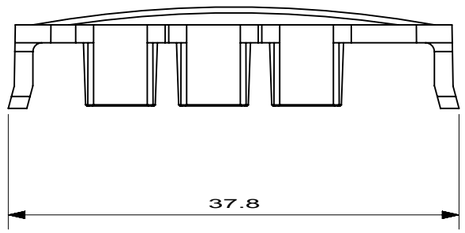





NOTE:

1. MATERIAL: NYLON66 - BLUE
2. OPERATING & STORAGE TEMPERATURE: -40°C TO 85°C
3. ALL DIMENSIONS SHOWN FOR REFERENCE ONLY
4. (3) TPA'S ARE REQUIRED PER HWB18 FUSE MODULE
5. TPA'S ARE INSTALLED TO HWB18 BASE AFTER WIRES WITH DELPHI TERMINALS AND SEALS ARE INSTALLED

# METRIC

COMPONENT

| NO | COMPONENT NO | DESCRIPTION | QTY/M | U/M |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎ DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

COPIES TO

| | | |
|---|---|---|
| 1 | 9 | 18 |
| 2 | 10 | 19 |
| 3 | 12 | 20 |
| 4 | 13 | 21 |
| 5 | 14 | 23 |
| 6 | 15 | 33 |
| 7 | 16 | 43 |
| 8 | 17 | 53 |

MATL SPEC: REFER TO NOTE 1

FINISH

| | | |
|---|---|---|
| DRW | FYUE | DATE 04/24/12 |
| CHK | | DATE |
| APPD | | DATE |

SCALE 2:1

SUPER DR

FINISH GOOD WT GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)

| DIMENSION | UP TO 0.5 - 3 | OVER 3 - 6 | UP TO 6 - 30 | OVER 30 - 120 | UP TO 120 - 400 |
|---|---|---|---|---|---|
| TOLERANCE | ±0.05 | ±0.05 | ±0.1 | ±0.15 | ±0.2 |

TITLE: TPA OUTLINE (HWB18)

3RD ANGLE PROJECTION

Littelfuse® LIPA CITY, BATANGAS, PHILIPPINES

REVISION B

DRWG. NO. OL-883-084

| LTR | DATE | REVISION | CHK | APD |
|---|---|---|---|---|
| A | 04/24/12 | 504798ERA - INITIAL RELEASE FYUE | | |
| B | 05/18/12 | 504988ECA - ADDED ERN NUMBER TO REVISION A FYUE | | |