


PART NUMBER	UPC CODE
LS7R04002PS00L	07945829343

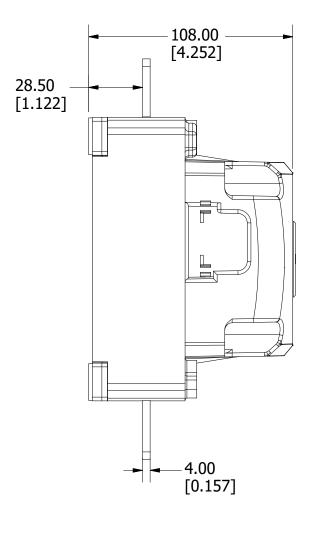

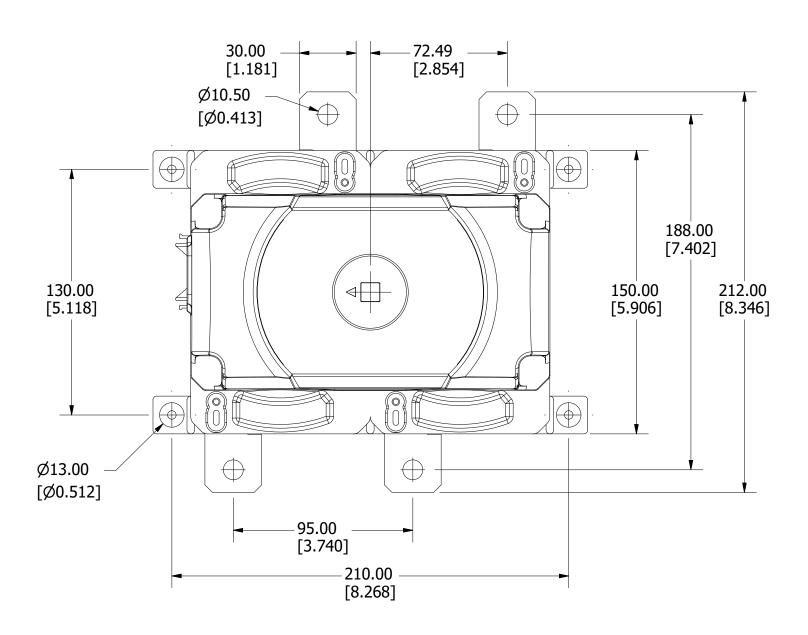

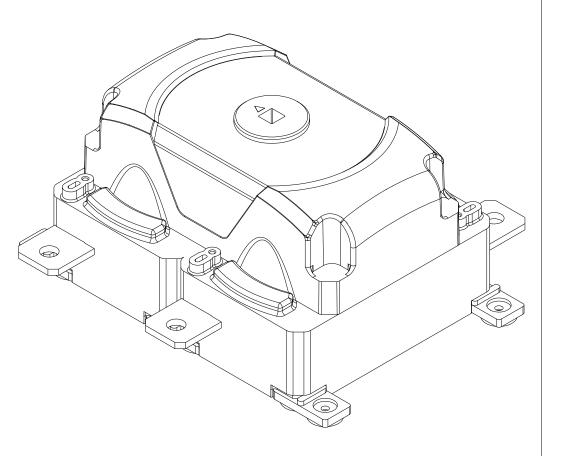


REVISION

DESCRIPTION 523719GCP - RELEASE PER EM3236 MRY

REV DATE
A 6/15/21





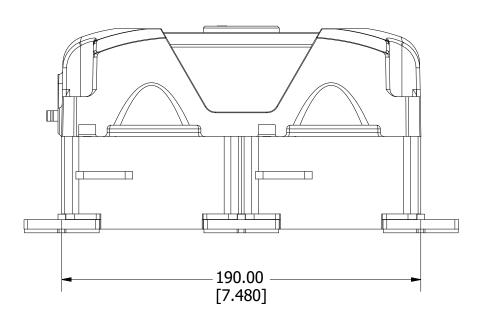

<s></s>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE		
•	DENOTES CRITICAL CHARACTERISTICS.		
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE		
<u>(ST)</u>	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.		
СР	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.		
MATL SPEC	FINISH		

DRW	DATE	SCALE	FINISH GOOD WT
myork	5/13/2021	NTS	GRAMS/PIEC

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

TITLE DISCONNECT SWITCH 400A 1500VDC 2 POLE OUTLINE





A | OL-LS7R04002PS00L