

Date: - 27 Jun, 2005

Data Sheet Issue:- 1

#### **Provisional Data**

## **Rectifier Diode**

## Types W3841V#300 to W3841V#340

Development Type No.: WX095V#340

#### **Absolute Maximum Ratings**

	VOLTAGE RATINGS	MAXIMUM LIMITS	UNITS
$V_{RRM}$	Repetitive peak reverse voltage, (note 1)	3000-3400	V
$V_{RSM}$	Non-repetitive peak reverse voltage, (note 1)	3100-3500	V

	OTHER RATINGS	MAXIMUM LIMITS	UNITS
I <sub>F(AV)M</sub>	Maximum average forward current, T <sub>sink</sub> =55°C, (note 2)	3841	Α
I <sub>F(AV)M</sub>	Maximum average forward current. T <sub>sink</sub> =100°C, (note 2)	2819	Α
$I_{F(AV)M}$	Maximum average forward current. T <sub>sink</sub> =100°C, (note 3)	1732	Α
I <sub>F(RMS)M</sub>	Nominal RMS forward current, T <sub>sink</sub> =25°C, (note 2)	6952	Α
I <sub>F(d.c.)</sub>	D.C. forward current, T <sub>sink</sub> =25°C, (note 4)	6033	Α
I <sub>FSM</sub>	Peak non-repetitive surge t <sub>p</sub> =10ms, V <sub>rm</sub> =60%V <sub>RRM</sub> , (note 5)	39.8	kA
I <sub>FSM2</sub>	Peak non-repetitive surge t <sub>p</sub> =10ms, V <sub>rm</sub> ≤10V, (note 5)	43.8	kA
I <sup>2</sup> t	$I^{2}t$ capacity for fusing $t_p$ =10ms, $V_{rm}$ =60% $V_{RRM}$ , (note 5)	7.92×10 <sup>6</sup>	A <sup>2</sup> s
I <sup>2</sup> t	l²t capacity for fusing t <sub>p</sub> =10ms, V <sub>rm</sub> ≤10V, (note 5)	9.59×10 <sup>6</sup>	A <sup>2</sup> s
T <sub>j op</sub>	Operating temperature range	-40 to +175	°C
$T_{stg}$	Storage temperature range	-55 to +175	°C

#### Notes:-

- 1) De-rating factor of 0.13% per °C is applicable for T<sub>i</sub> below 25°C.
- 2) Double side cooled, single phase; 50Hz, 180° half-sinewave.
- 3) Single side cooled, single phase; 50Hz, 180° half-sinewave.
- 4) Double side cooled.
- 5) Half-sinewave, 175°C T<sub>i</sub> initial.



### **Characteristics**

	PARAMETER	MIN.	TYP.	MAX.	TEST CONDITIONS (Note 1)	UNITS
V	Marine manager for would walk and	-	-	1.40	I <sub>TM</sub> =4600A	V
$V_{FM}$	Maximum peak forward voltage	-	-	2.19	I <sub>TM</sub> =11500A	V
$V_{T0}$	Threshold voltage	-	-	0.860		V
$r_{T}$	Slope resistance	-	-	0.115		mΩ
	Deals never a summent	-	-	20	Rated V <sub>RRM</sub> , T <sub>j</sub> =25°C	mA
I <sub>RRM</sub> Peak reverse current	Peak reverse current	-	-	100	Rated V <sub>RRM</sub>	mA
Q <sub>rr</sub>	Recovered charge	-	5200	-		μC
$Q_{ra}$	Recovered charge, 50% Chord	-	3700	4500	I <sub>TM</sub> =1000A, t <sub>p</sub> =1000μs, di/dt=10A/μs,	μC
Irr	Reverse recovery current	-	200	-	V <sub>r</sub> =50V	Α
t <sub>rr</sub>	Reverse recovery time, 50% Chord	-	37	-		μs
0	The second secon	-	-	0.016	Double side cooled	K/W
$R_{thJK}$	Thermal resistance, junction to heatsink	-	-	0.032	Single side cooled	K/W
F	Mounting force	27	-	34		kN
\A/	Mainte	-	1000	-	Outline Options VC & VT	
Wt	Weight	-	800	-	Outline Option VF	g

#### Notes:-

- 1) Unless otherwise indicated  $T_j=175$ °C.
- 2) For other clamp forces, please consult factory.

Notes on rupture rated packages.

This product is available with a non-rupture rated package.

For additional details on these products, please consult factory.



#### **Notes on Ratings and Characteristics**

#### 1.0 Voltage Grade Table

Voltage Grade	V <sub>RRM</sub> V	V <sub>RSM</sub> V	V <sub>R</sub> DC V
30	3000	3100	1750
32	3200	3300	1800
34	3400	3500	1850

#### 2.0 Extension of Voltage Grades

This report is applicable to other voltage grades when supply has been agreed by Sales/Production.

#### 3.0 De-rating Factor

A blocking voltage de-rating factor of 0.13%/°C is applicable to this device for T<sub>i</sub> below 25°C.

#### 4.0 Snubber Components

When selecting snubber components, care must be taken not to use excessively large values of snubber capacitor or excessively small values of snubber resistor. Such excessive component values may lead to device damage due to the large resultant values of snubber discharge current. If required, please consult the factory for assistance.

#### 5.0 Computer Modelling Parameters

#### 5.1 Device Dissipation Calculations

$$I_{AV} = \frac{-V_{T0} + \sqrt{{V_{T0}}^2 + 4 \cdot f\!f^2 \cdot r_T \cdot W_{AV}}}{2 \cdot f\!f^2 \cdot r_T} \qquad \text{and:} \qquad W_{AV} = \frac{\Delta T}{R_{th}} \\ \Delta T = T_{j\,\text{max}} - T_K$$

Where  $V_{T0}$ =0.86V,  $r_T$ =0.115m $\Omega$ ,

 $R_{\it th}$  = Supplementary thermal impedance, see table below and

ff = Form factor, see table below.

Supplementary Thermal Impedance					
Conduction Angle	d.c.				
Square wave Double Side Cooled	0.0205	0.0190	0.0170	0.0160	
Square wave Single Side Cooled	0.0400	0.0376	0.0340	0.0320	
Sine wave Double Side Cooled	0.0198	0.0177	0.0162		
Sine wave Single Side Cooled	0.0388	0.0355	0.0324		

Form Factors					
Conduction Angle 6 phase (60°) 3 phase (120°) ½ wave (180°) d.c.					
Square wave	2.449	1.732	1.414	1	
Sine wave	2.778	1.879	1.57		



#### 5.2 Calculating V<sub>F</sub> using ABCD Coefficients

The on-state characteristic I<sub>F</sub> vs. V<sub>F</sub>, on page 6 is represented in two ways;

- (i) the well established  $V_{T0}$  and  $r_T$  tangent used for rating purposes and
- (ii) a set of constants A, B, C, D, forming the coefficients of the representative equation for V<sub>F</sub> in terms of I<sub>F</sub> given below:

$$V_F = A + B \cdot \ln(I_F) + C \cdot I_F + D \cdot \sqrt{I_F}$$

The constants, derived by curve fitting software, are given below for both hot and cold characteristics. The resulting values for  $V_F$  agree with the true device characteristic over a current range, which is limited to that plotted.

	25°C Coefficients 175°C Coefficients		175°C Coefficients
Α	0.7415911	Α	0.4271823
В	0.01014829	В	0.02992417
С	5.11423×10 <sup>-5</sup>	С	8.05316×10⁻⁵
D	4.822900×10 <sup>-3</sup>	D	5.160430×10 <sup>-3</sup>



#### 5.3 D.C. Thermal Impedance Calculation

$$r_{t} = \sum_{p=1}^{p=n} r_{p} \cdot \left(1 - e^{\frac{-t}{\tau_{p}}}\right)$$

Where p = 1 to n, n is the number of terms in the series and:

t = Duration of heating pulse in seconds.

r, = Thermal resistance at time t.

 $r_p$  = Amplitude of  $p_{th}$  term.

 $\tau_p$  = Time Constant of  $r_{th}$  term.

The coefficients for this device are shown in the tables below:

D.C. Double Side Cooled					
Term	Term 1 2 3 4				
rp	6.850949×10 <sup>-3</sup>	6.006273×10 <sup>-3</sup>	1.872869×10 <sup>-3</sup>	1.385196×10 <sup>-3</sup>	
$ au_{\mathcal{P}}$	1.219991	0.1764593	0.02313936	3.319288×10 <sup>-3</sup>	

	D.C. Single Side Cooled						
Term	1	2	3	4	5		
$r_p$	0.01803063	5.201877×10 <sup>-3</sup>	4.810704×10 <sup>-3</sup>	3.890524×10 <sup>-3</sup>	2.299757×10 <sup>-3</sup>		
$ au_{\mathcal{P}}$	9.810556	4.974419	0.3591421	0.09925002	5.541104×10 <sup>-3</sup>		

#### 6.0 Reverse recovery ratings

(i) Q<sub>ra</sub> is based on 50% I<sub>rm</sub> chord as shown in Fig. 1




Fig. 1

$$Q_{rr} = \int_{0}^{150\,\mu s} i_{rr}.dt$$

(iii) 
$$K Factor = \frac{t_1}{t_2}$$

#### **Curves**

Figure 1 – Forward characteristics of Limit device

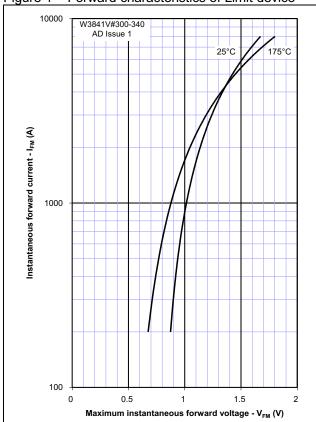


Figure 2 – Transient thermal impedance

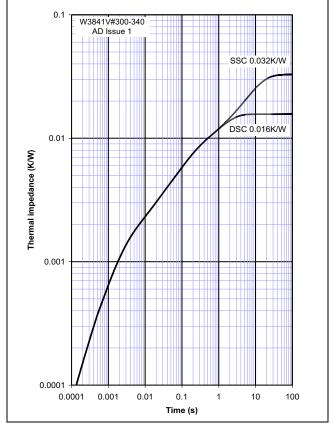


Figure 3 – Maximum surge Rating

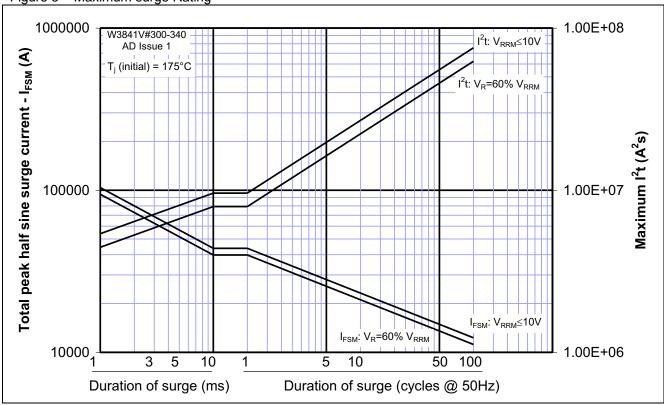


Figure 4 - Total recovered charge, Q<sub>rr</sub>

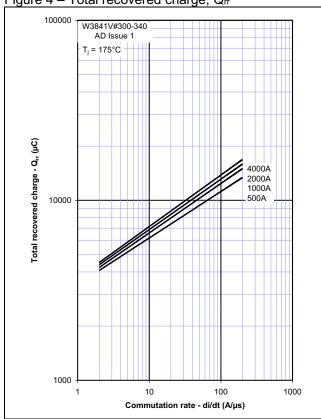
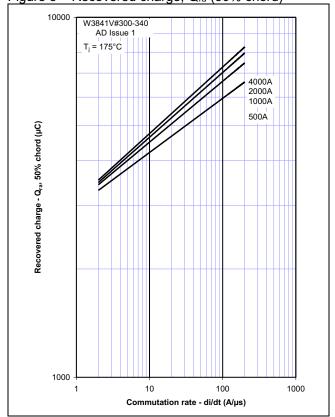


Figure 5 – Recovered charge, Q<sub>ra</sub> (50% chord)



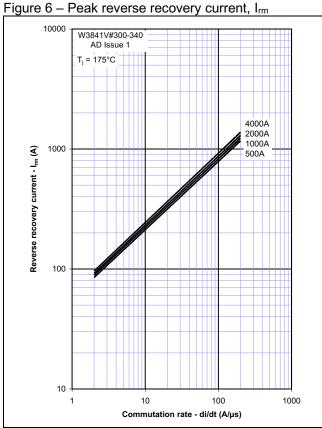


Figure 7 – Maximum recovery time, t<sub>rr</sub> (50% chord)

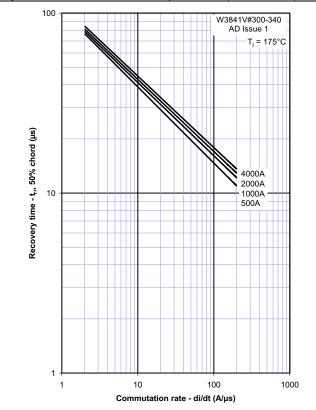


Figure 8 – Forward current vs. Power dissipation – Double Side Cooled

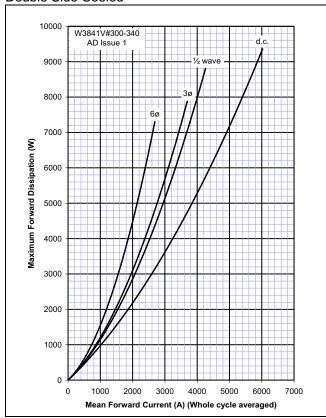


Figure 10 – Forward current vs. Power dissipation – Single Side Cooled

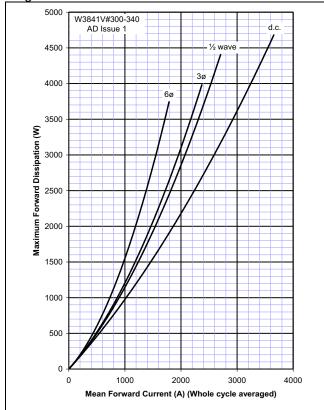


Figure 9 – Forward current vs. Heatsink temperature – Double Side Cooled




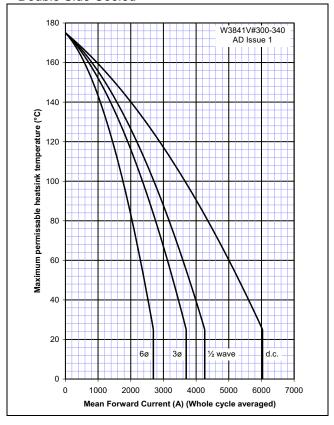


Figure 11 – Forward current vs. Heatsink temperature – Single Side Cooled

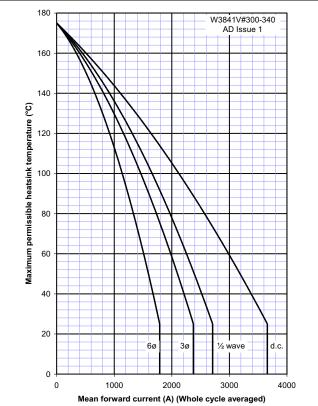

#### **Outline Drawing & Ordering Information**

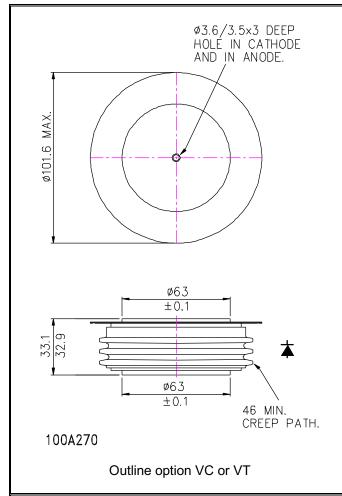

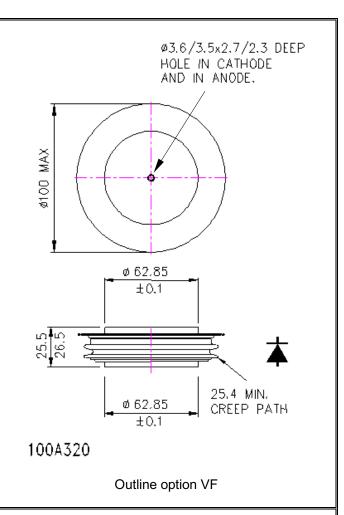

ORDERING INFORMATION

(Please quote 10 digit code as below)

W3841	V#	<b>* *</b>	0
Fixed Type Code	Outline code  VC = 33.1mm clamp height capsule  VF = 26.5mm clamp height capsule  VT = 33.1mm clamp height capsule, rupture rated	Voltage Code V <sub>RRM</sub> /100 30-34	Fixed Code

Typical order code:  $W3841VF320 - 3200V\ V_{RRM}$ , 26.5mm clamp height capsule.

#### **IXYS Semiconductor GmbH**

Edisonstraße 15 D-68623 Lampertheim Tel: +49 6206 503-0 Fax: +49 6206 503-627

E-mail: marcom@ixys.de

#### **IXYS** Corporation

3540 Bassett Street Santa Clara CA 95054 USA Tel: +1 (408) 982 0700

Fax: +1 (408) 496 0670 E-mail: <u>sales@ixys.net</u>

# WESTCODE An LIXYS Company

www.westcode.com

www.ixys.com

#### Westcode Semiconductors Ltd

Langley Park Way, Langley Park, Chippenham, Wiltshire, SN15 1GE. Tel: +44 (0)1249 444524 Fax: +44 (0)1249 659448 E-mail: WSL.sales@westcode,com

#### **Westcode Semiconductors Inc**

3270 Cherry Avenue Long Beach CA 90807 USA Tel: +1 (562) 595 6971 Fax: +1 (562) 595 8182

E-mail: WSI.sales@westcode.com

The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors Westcode Semiconductors Ltd.

In the interest of product improvement, Westcode reserves the right to change specifications at any time without prior notice.

Devices with a suffix code (2-letter, 3-letter or letter/digit/letter combination) added to their generic code are not necessarily subject to the conditions and limits contained in this report.

© Westcode Semiconductors Ltd.

